





3G-RRU24
24" RECESSED RUBO




i THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
<div><p>RUBO</p></div> <div> x2</div> <div> x4</div>	

INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
 ATTENTION	
 POWER ON	
 POWER OFF	


1 CEILING PANEL CUTOUT



FIXTURE TYPE	CEILING HOLE SIZE
RRU24	Ø22.56"


INSTALL CEILING PANEL BELOW FIXTURE

2

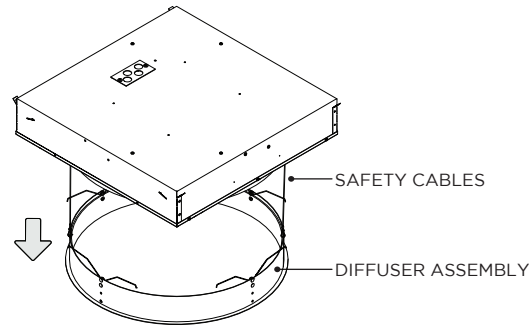


REMOVE DIFFUSER ASSEMBLY FROM FIXTURE HOUSING
DISCONNECT SAFETY CABLES

3

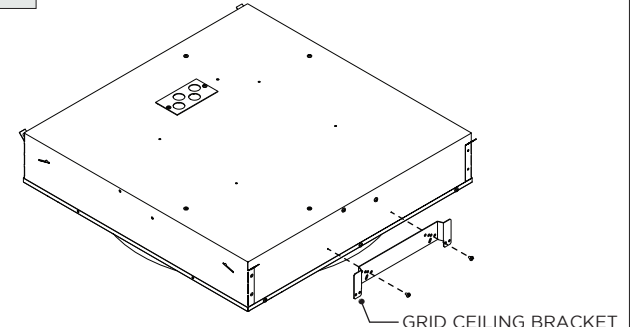


MOUNT GRID CEILING BRACKET TO FIXTURE HOUSING

3A GRID CEILING BRACKET MOUNTING

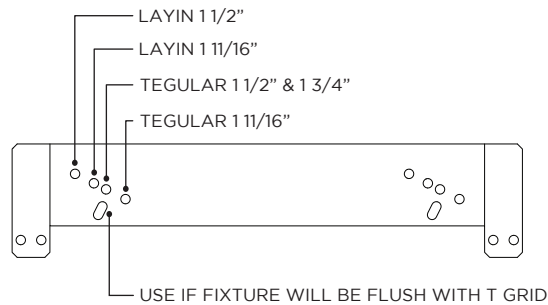


USE IF FIXTURE WILL BE FLUSH WITH T GRID

4

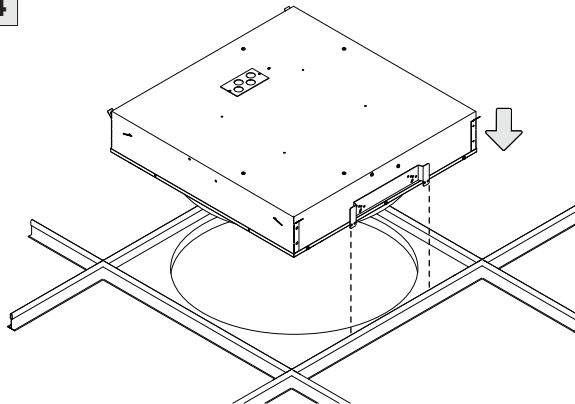


5

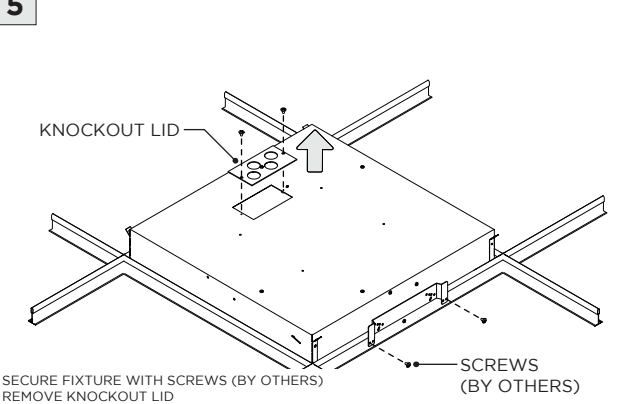


SECURE FIXTURE WITH SCREWS (BY OTHERS)
REMOVE KNOCKOUT LID

5A

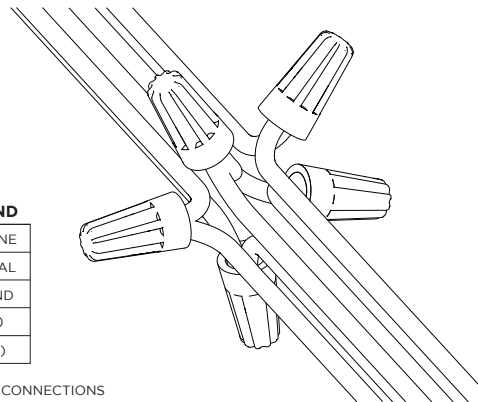


6

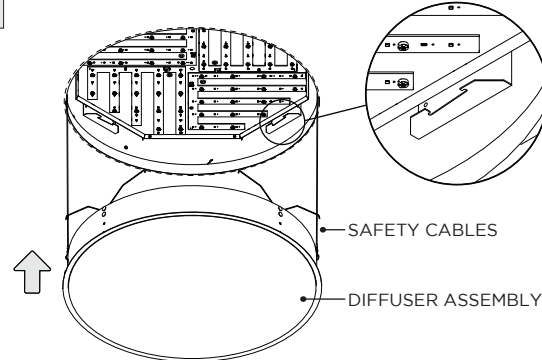

REATTACH SAFETY CABLES
ENGAGE DIFFUSER ASSEMBLY SPRINGS TO HOUSING CLIPS


DRIVER SERVICING

1

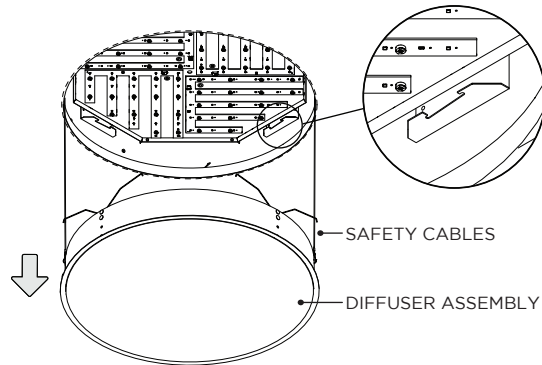


DISENGAGE DIFFUSER ASSEMBLY SPRINGS FROM HOUSING CLIPS
DISCONNECT SAFETY CABLES

2

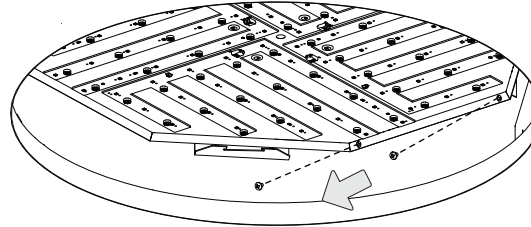


REMOVE SCREWS
SWING OUT AND REMOVE LED TRAY

2A

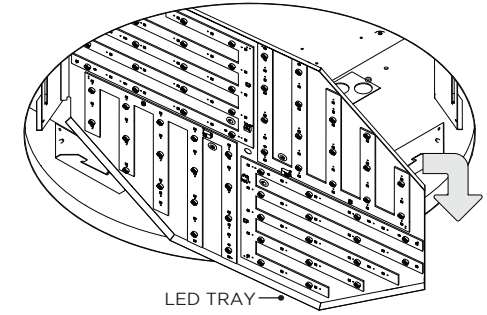


LED TRAY

3

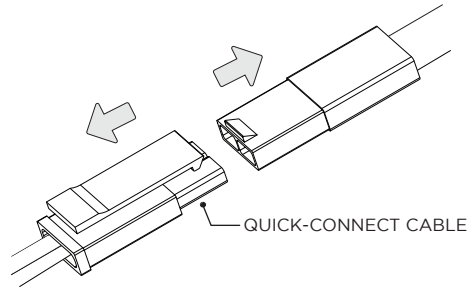

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS


4

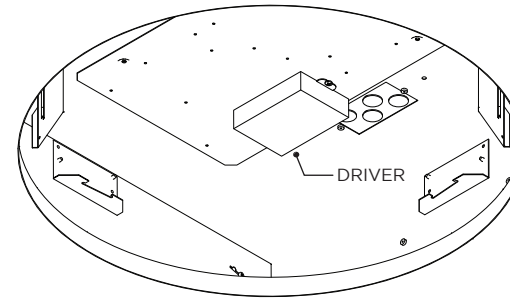

DRIVER LOCATED BEHIND LED TRAY
SERVICE DRIVER AND REASSEMBLE FIXTURE


LED SERVICING

1

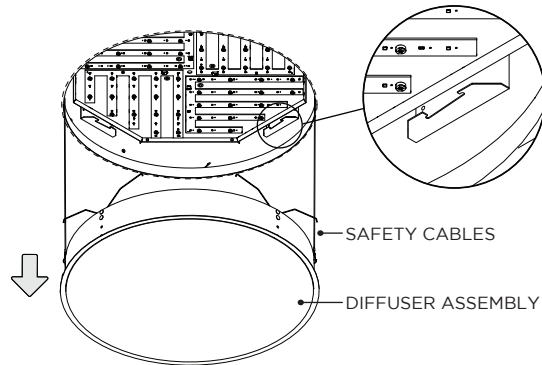


DISENGAGE DIFFUSER ASSEMBLY SPRINGS FROM HOUSING CLIPS
DISCONNECT SAFETY CABLES

2

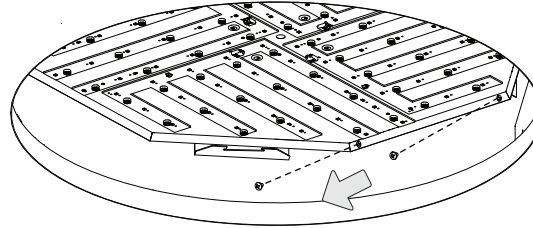


REMOVE SCREWS
SWING OUT AND REMOVE LED TRAY

2A

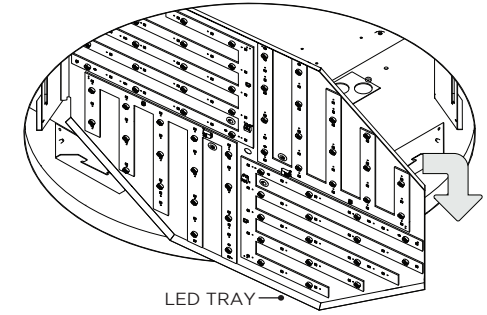

3

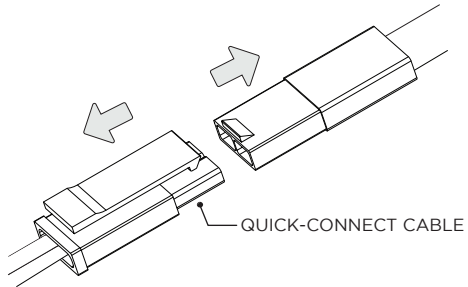

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS
REPLACE LED TRAY AND REASSEMBLE FIXTURE