








3G-58RSL, 3G-48RSL
5.8" 4.8" CURVED RECESSED SLOT
 FLANGELESS/TRIM FLANGE



⚠ FOR **NEW CONSTRUCTION** INSTALLATION ONLY



ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

FIXTURE TYPES	INCLUDED COMPONENTS
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>58RSL PROFILE</p>  </div> <div style="text-align: center;"> <p>48RSL PROFILE</p>  </div> </div>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>STARTER</p> </div> <div style="text-align: center;">  <p>JOINER</p> </div> <div style="text-align: center;">  <p>ENDER</p> </div> </div>

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ⓘ ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
⚡ POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
ⓧ POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

OVERVIEW



FLANGELESS - FX

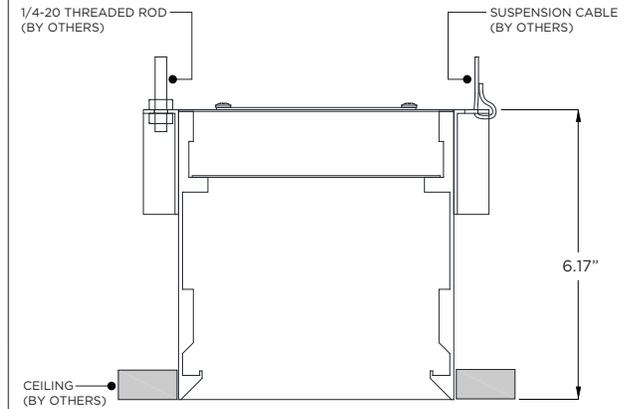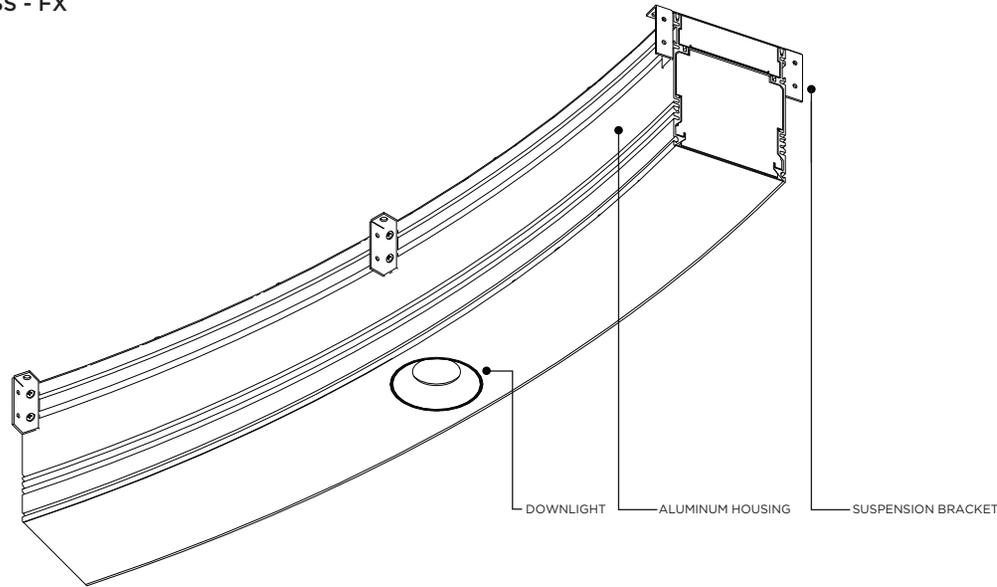

FLANGELESS - FX - CEILING CUT-OUT DIMENSIONS




FIXTURE TYPE	WIDTH	LENGTH
3G-48RSL	4.95"	LENGTH + 0.05"
3G-58RSL	5.95"	LENGTH + 0.05"







WHITE TRIM FLANGE - WT

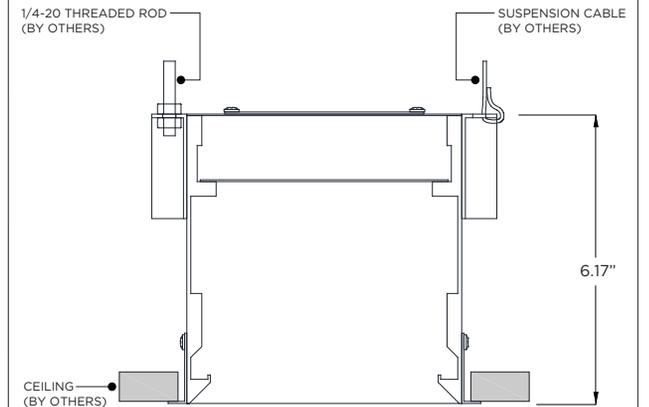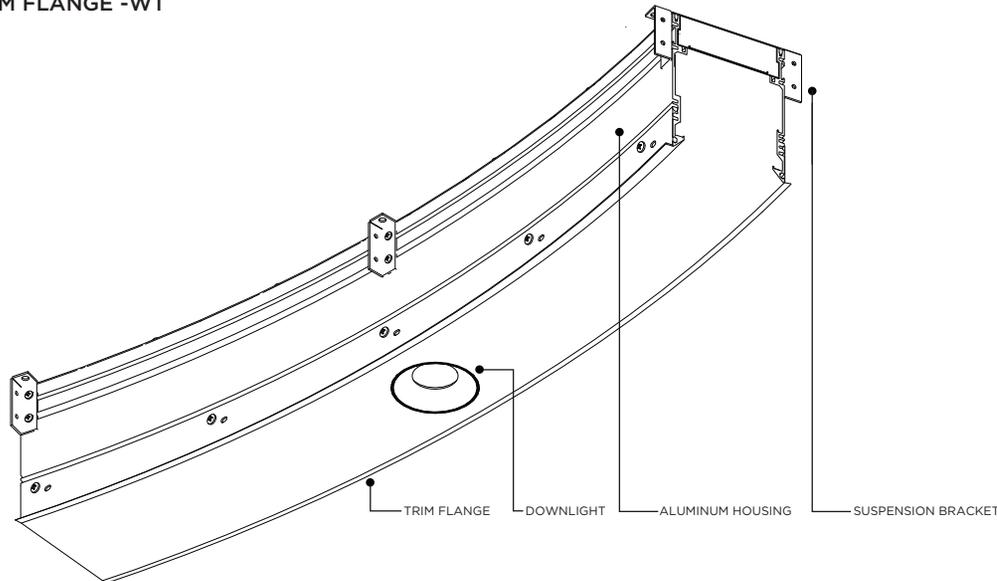

TRIM FLANGE - WT - CEILING CUT-OUT DIMENSIONS


FIXTURE TYPE	WIDTH	LENGTH
3G-48RSL	4.85"	LENGTH + 0.40"
3G-58RSL	6.30"	LENGTH + 0.40"

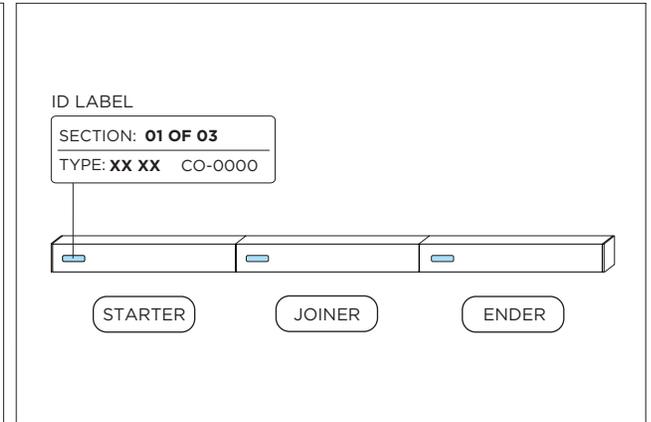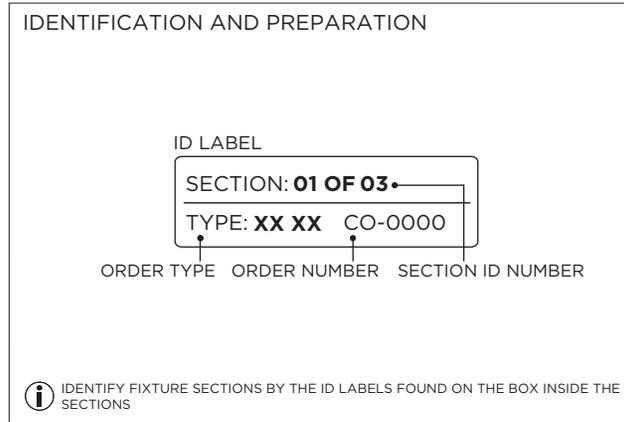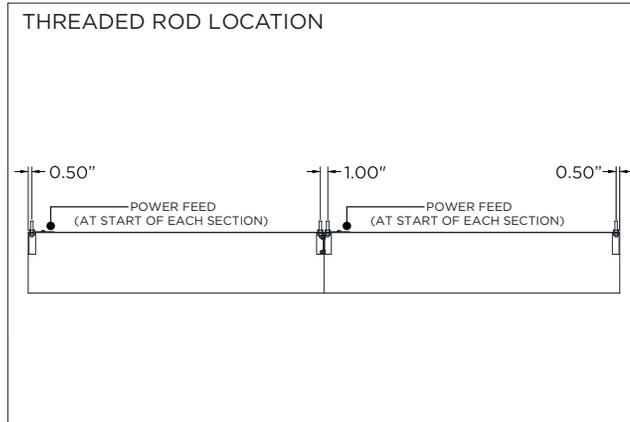

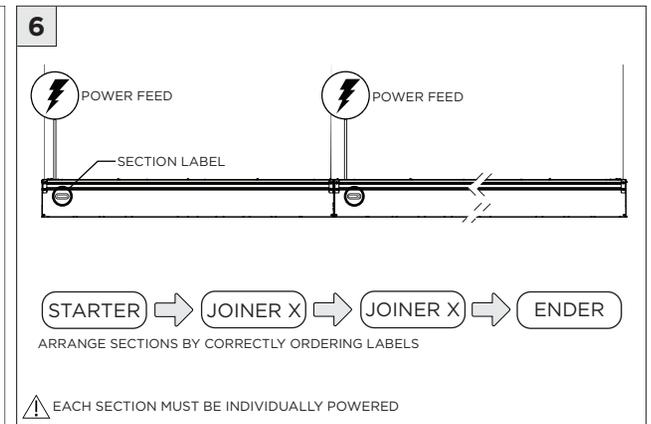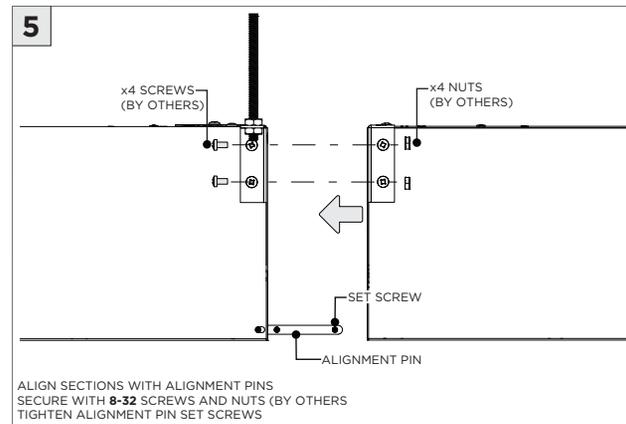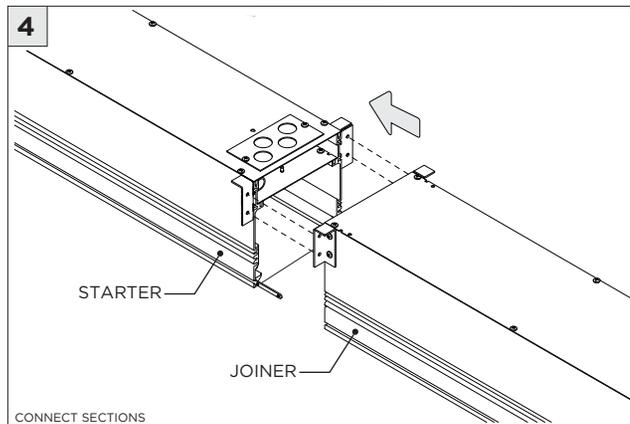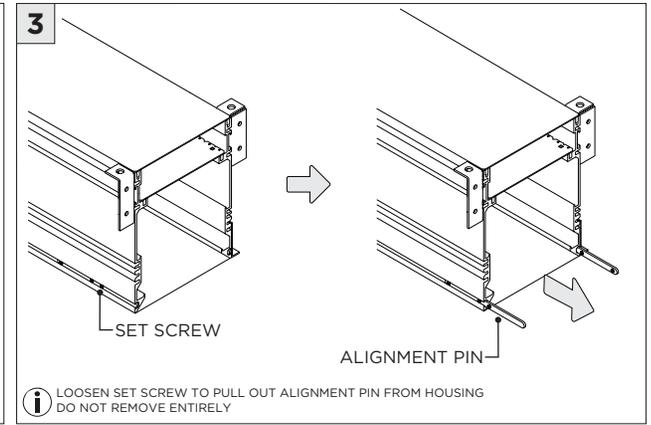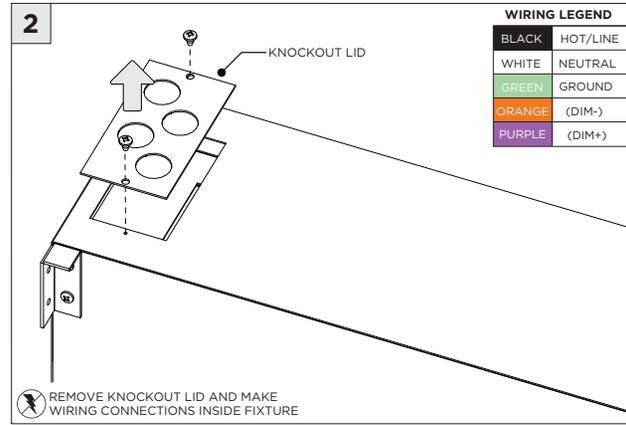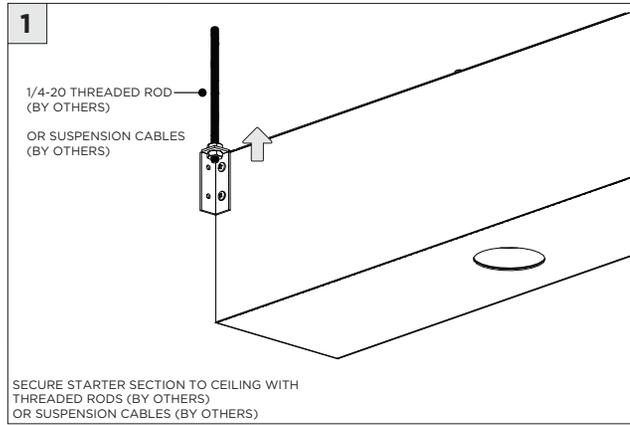


LED ADJUSTMENT

1




LIFT LENS AND DETACH INSERT FROM CEILING AS SHOWN

1A

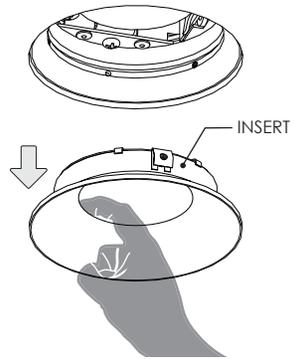


2

ANGLE ADJUSTMENT

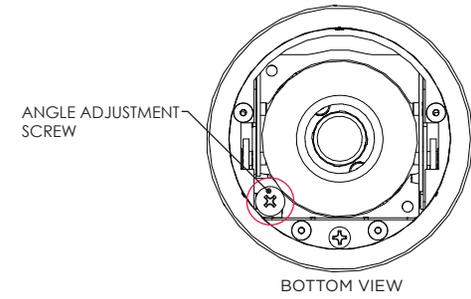


TURN SCREW TO ADJUST LED ANGLE

2A

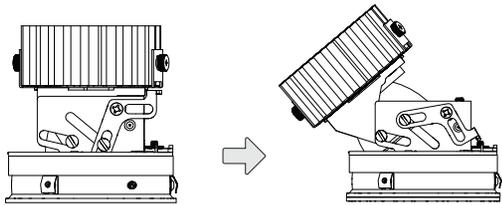


3

ROTATION ADJUSTMENT

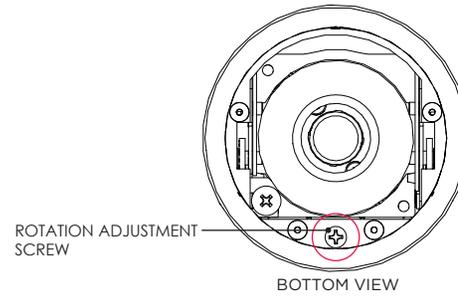




LOOSEN SCREW TO UNLOCK LED ASSEMBLY ROTATION

3A

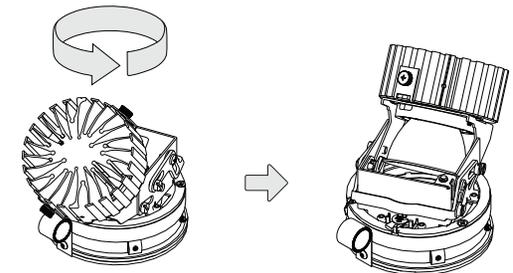


TIGHTEN SCREW AFTER ROTATING LED ASSEMBLY

LED SERVICING - DL33R

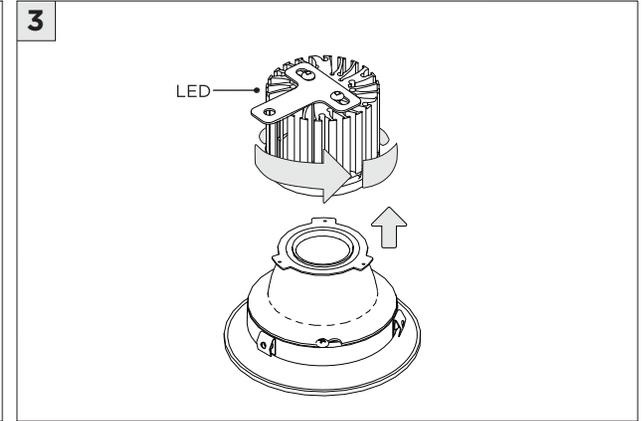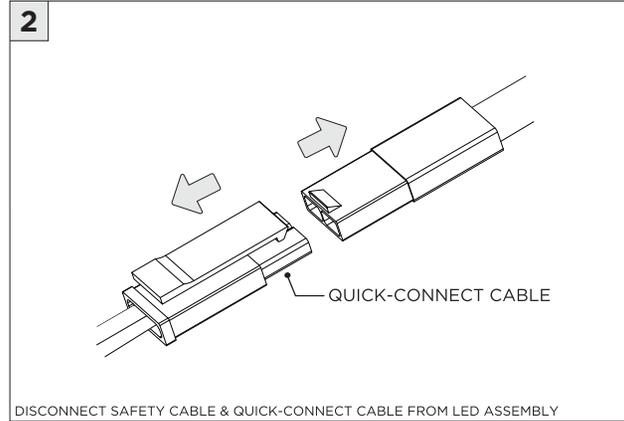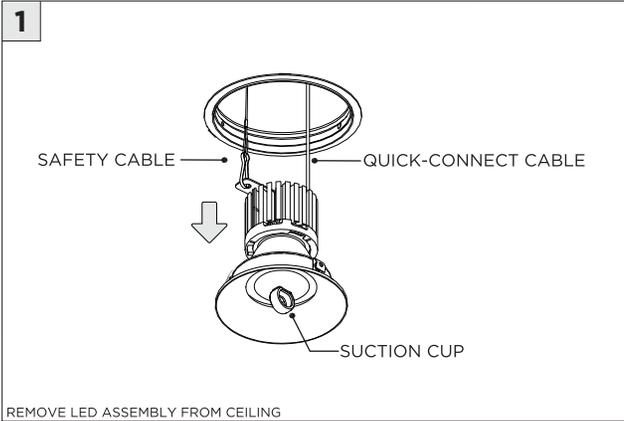

LED SERVICING - DL33RA


1



LENS


LIFT LENS AND DETACH INSERT FROM LED ASSEMBLY

2

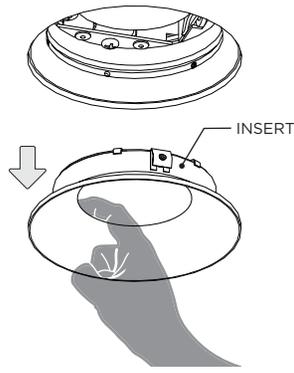

INSERT

3

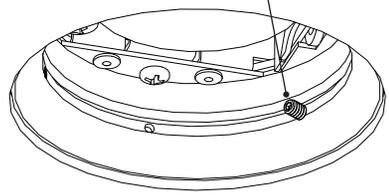


SET SCREW

LOOSEN THREE SET SCREWS INSIDE ADAPTER RING

 DO NOT FULLY REMOVE SET SCREWS FROM ADAPTER RING


4



SET SCREW


BOTTOM VIEW

5



UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW


6

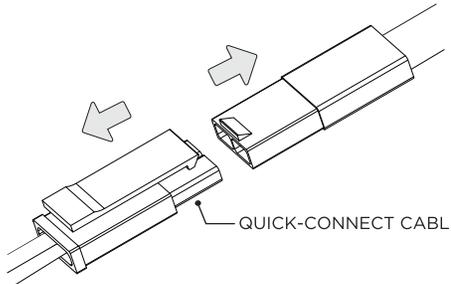

QUICK-CONNECT CABLE

DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


7

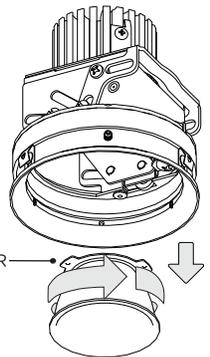

REFLECTOR

TWIST REFLECTOR TO REMOVE

8

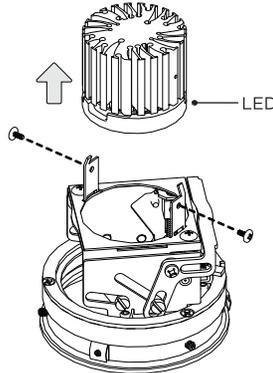

LED

DRIVER SERVICING

