


RECESSED LINIA

3G-2RLI

2" RECESSED

TRIM, TRIMLESS & FLANGELESS

3G
LIGHTING

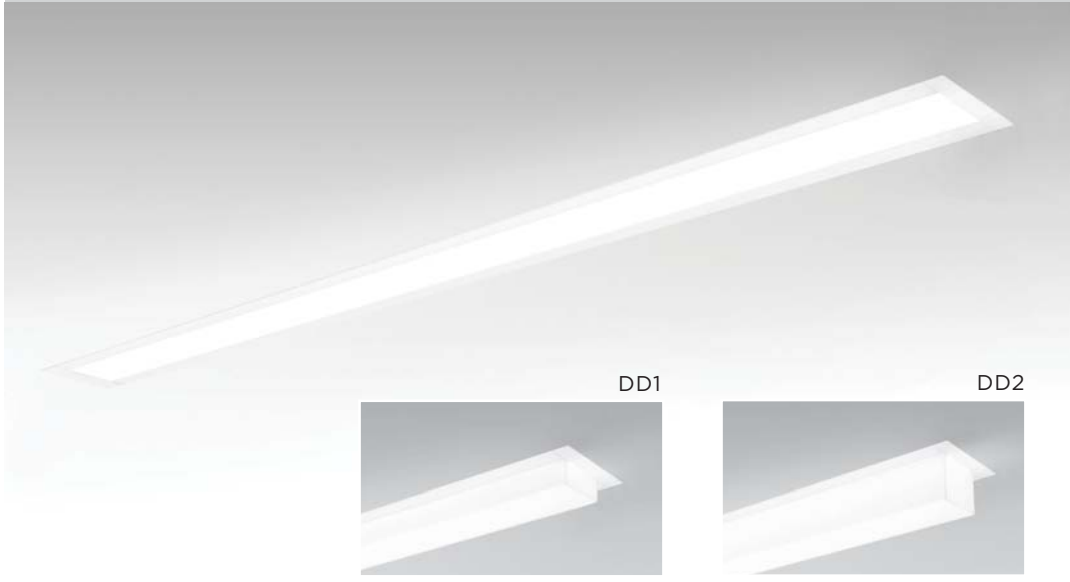

Pendant Linia



Surface Linia



Wall Linia

FEATURES

CONSTRUCTION

- Extruded aluminum housing with 2" aperture
- Individual units and continuous runs in 1' increments
- Trimless model features mudding flange
- Trim model features a 5/8" trim flange
- 24 gauge LED reflector with high reflectance white powder coated finish
- Extruded acrylic lens with a satin finish, available in flush and unique drop lens options

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range
- Emergency Battery: 90 minutes

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of >50,000 hours
- Color consistency 3 SDCM
- CRI>80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at 50,000 hours

MOUNTING

- Suitable for drywall and wood ceilings (see mounting details)

FINISH

- Polyester powder coated matte white with 95% reflectance

LABELS

- ETL listed. Suitable for dry or damp locations

WARRANTY


- 5 Year limited warranty

PROJECT

TYPE

DATE

CATALOG #

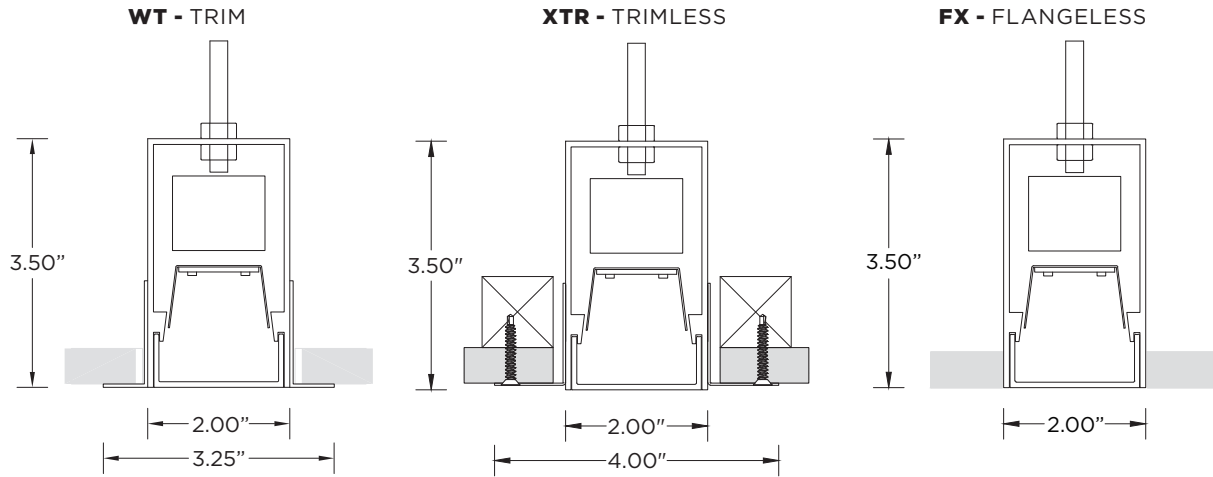

CUTOUT	2.65" ± 0.063"	2.65" ± 0.063"	2.063" (+0" - 0.063")
---------------	-------------------	-------------------	--------------------------

TRIM & TRIMLESS LENGTH CUTOUT - ADD 0.500"


FLANGELESS LENGTH CUTOUT - ADD 0.125"

LENS OPTIONS

FL - FLUSH LENS

DD1 - 1" DROP LENS

DD2 - 2" DROP LENS

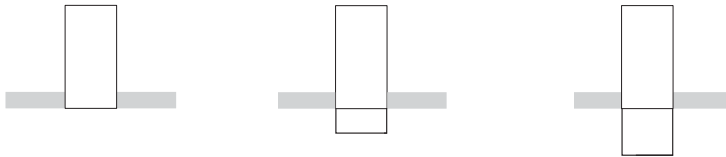

ORDERING INFORMATION

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER
3G-2RLI	L1 - LOW OUTPUT	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD - 100-1%)
	L2 - STANDARD OUTPUT	30K - 3000K	277 - 277V	DHL - LUTRON(3-WIRE - 100-1%)
	L4 - HIGH OUTPUT	35K - 3500K	347 - 347V (0-10V ONLY)	DHL2 - LUTRON (ECOSYSTEM - 100-1%)
		40K - 4000K		DALI - DALI (100-1%)
3G-2RLI				

FLANGE TYPE	LENS OPTIONS	OPTIONS	LENGTH (FEET)
XTR - TRIMLESS WT - WHITE TRIM FX - FLANGELESS	FL - FLUSH DD1 - 1" DROPLENS DD2 - 2" DROPLENS	EM - EMERGENCY BATTERY (4' SECTION) CP - CHICAGO PLENUM	S - ___' (STRAIGHT RUN)* L - ___' X ___' (L-SHAPE) U - ___' X ___' X ___' (U-SHAPE) R - ___' X ___' (RECTANGLE/SQUARE)
			*Individual units available in 3', 4', 5', or 8'. Continuous runs available in 1' increments.

ORDERING EXAMPLE **3G-2RLI-L2-30K-120-DIM-XTR-FL-S-8'**

Copyright 2016 3G Lighting.
P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.



RECESSED LINIA

3G-2RLI
2" RECESSED
 TRIM, TRIMLESS & FLANGELESS




PERFORMANCE CHART (Based on 3500K, 4' length)


LENS OPTIONS	LED SYSTEM	WATTAGE/FT	LUMENS/FT	EFFICACY (LM/W)	IES FILES
FLUSH	L1 - LOW OUTPUT	3.5W	365	104	DOWNLOAD
	L2 - STANDARD OUTPUT	5.5W	522	95	DOWNLOAD
	L4 - HIGH OUTPUT	9.5W	866	92	DOWNLOAD
1" DROP	L1 - LOW OUTPUT	3.5W	386	110	DOWNLOAD
	L2 - STANDARD OUTPUT	5.5W	535	97	DOWNLOAD
	L4 - HIGH OUTPUT	9.5W	918	97	DOWNLOAD
2" DROP	L1 - LOW OUTPUT	3.5W	383	110	DOWNLOAD
	L2 - STANDARD OUTPUT	5.5W	530	97	DOWNLOAD
	L4 - HIGH OUTPUT	9.5W	910	96	DOWNLOAD

MOUNTING


WT - TRIM

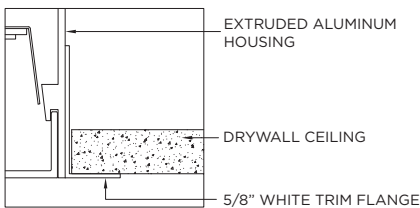

XTR - TRIMLESS

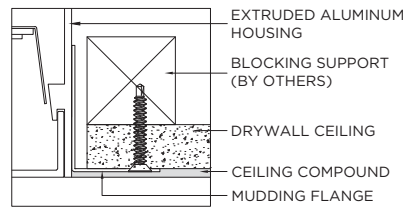

FX - FLANGELESS

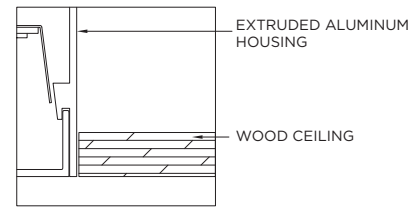

RUN CHART (Begin measurements at start of run, in a clockwise direction)

STRAIGHT (S-___')

ORDERING EXAMPLE:

3G-2RLI-L2-30K-120-DIM-XTR-FL-S-8'




L SHAPE (L-___' x ___')


ORDERING EXAMPLE:

A - 3G-2RLI-L2-30K-120-DIM-XTR-FL-L-8'x6'

B - 3G-2RLI-L2-30K-120-DIM-XTR-FL-L-6'x8'

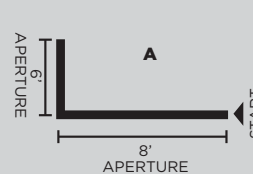

OR

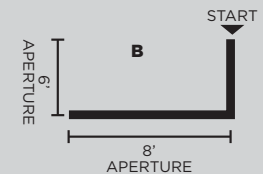


U SHAPE (U-___' x ___' x ___')


ORDERING EXAMPLE:

A - 3G-2RLI-L2-30K-120-DIM-XTR-FL-U-4'x8'x6'

B - 3G-2RLI-L2-30K-120-DIM-XTR-FL-U-6'x8'x4'

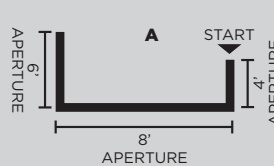

OR

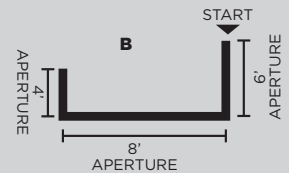

RECTANGLE (R-___' x ___')

ORDERING EXAMPLE:

3G-2RLI-L2-30K-120-DIM-XTR-FL-R-8'x6'

