
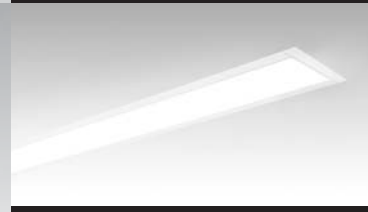


PENDANT LINIA

3G-4PLI-DI
3.5" PENDANT
DIRECT & INDIRECT

3G
LIGHTING

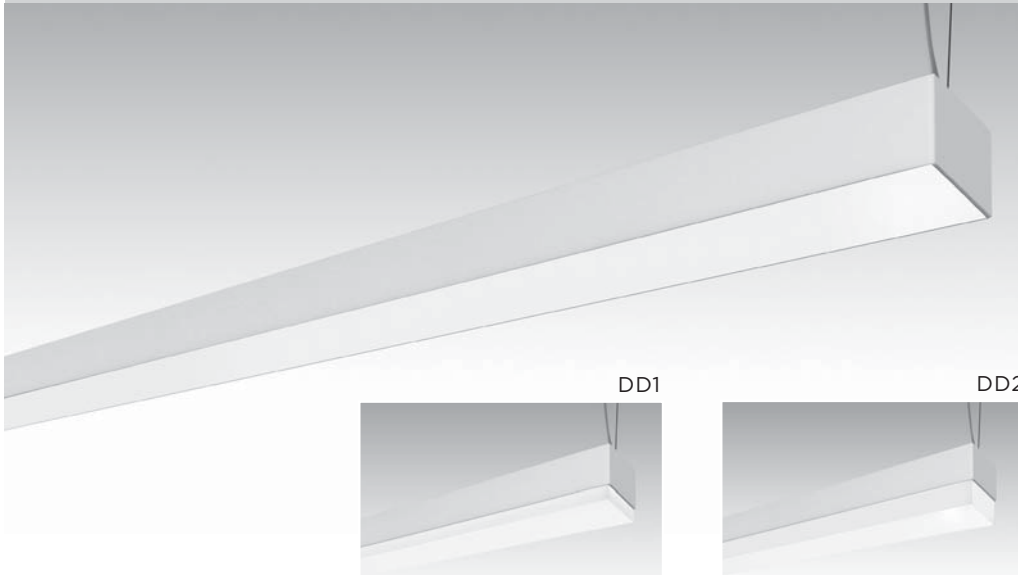

Recessed Linia



Surface Linia



Wall Linia

FEATURES

CONSTRUCTION

- 3.5" extruded aluminum housing with machined aluminum end caps
- Individual units and continuous runs in 1' increments
- 24 gauge LED reflector with high reflectance white powder coated finish
- Extruded acrylic lens with satin finish available in flush and drop lens options

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eLdoLED Dali driver available with 100-1% dimming range
- Emergency Battery: 90 minutes

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of >50,000 hours
- Color consistency 3 SDCM
- CRI>80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at >50,000 hours

MOUNTING

- Suitable for drywall and wood ceilings (see mounting details)
- Suitable for various grid ceiling applications (see mounting details)

FINISH

- Standard polyester powder coated matte white finish. Optional matte silver and black finish

LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY

- 5 Year limited warranty

PENDANT - LINIA | 3G - 4PLI-DI | 3.5" PENDANT DIRECT & INDIRECT




PROJECT

TYPE

DATE

CATALOG #


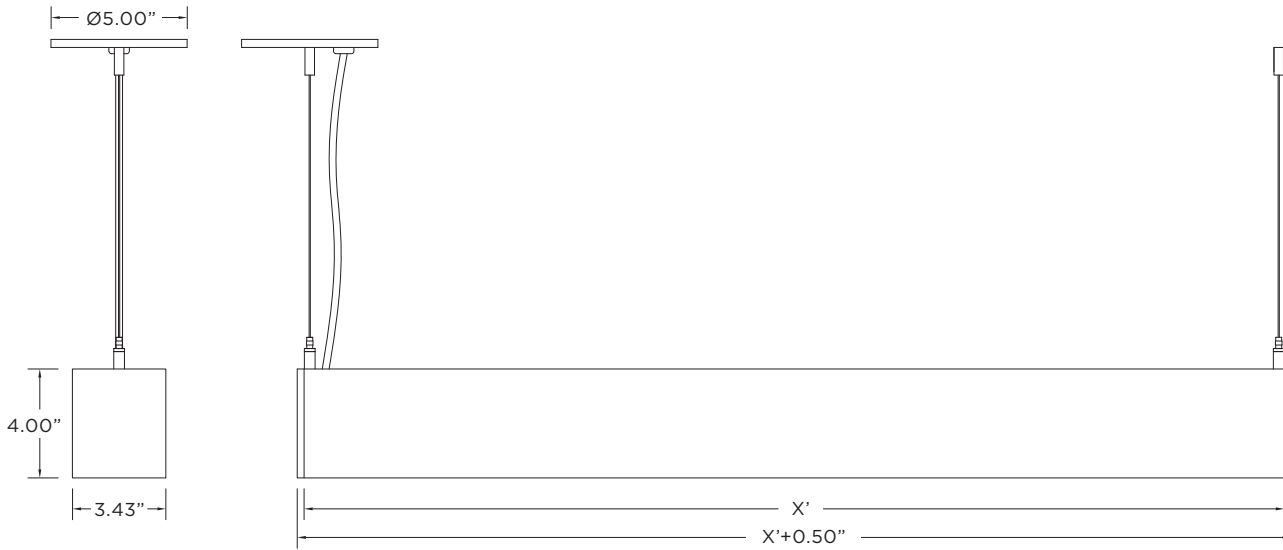


LENS OPTIONS

FL - FLUSH LENS

DD1 - 1" DROP LENS

DD2 - 2" DROP LENS



ORDERING INFORMATION

CAT. NO	LED SYSTEM		COLOR TEMP	VOLTAGE	DRIVER
	DIRECT	INDIRECT			
3G-4PLI-DI	L1 - LOW OUTPUT	L1 - LOW OUTPUT	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD 100-1%)
	L2 - STANDARD OUTPUT	L2 - STANDARD OUTPUT	30K - 3000K	277 - 277V	DHL - LUTRON (3-WIRE-100-1%)
	L4 - HIGH OUTPUT	L4 - HIGH OUTPUT	35K - 3500K	347 - 347V (0-10V ONLY)	DHL2 - LUTRON (ECOSYSTEM-100-1%)
			40K - 4000K		DALI - DALI (100-1%)

3G-4PLI-DI				
-------------------	--	--	--	--

LENS OPTIONS	FINISH	CABLE LENGTH	CIRCUITING	OPTIONS	LENGTH (FEET)
FL - FLUSH DD1 - 1" DROP LENS DD2 - 2" DROP LENS	WH - WHITE (STANDARD) SV - SILVER BK - BLACK	60 - 60" 120 - 120"	1C - 1 CIRCUIT 2C - 2 CIRCUITS	EM - EMERGENCY BATTERY (4' SECTION)	S - ___' (STRAIGHT RUN)* L - ___' X ___' (L-SHAPE) U - ___' X ___' X ___' (U-SHAPE) R - ___' X ___' (RECTANGLE/SQUARE)

NOTE: Indirect lens available in flush only.

*Individual units available in 3', 4', 5', or 8'. Continuous runs available in 1' increments.

--	--	--	--	--	--

ORDERING EXAMPLE **3G-4PLI-L2-L2-30K-120-DIM-FL-WH-60-2C-S-8'**

Copyright 2016 3G Lighting
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
 3G reserves the right to change, without notice, specifications or materials for product improvement.



PENDANT LINIA

3G-4PLI-DI
3.5" PENDANT
 DIRECT & INDIRECT




PERFORMANCE CHART (Based on 3500K, 4' length)

LENS OPTIONS	LED SYSTEM	WATTAGE/FT	LUMENS/FT	EFFICACY (LM/W)	DISTRIBUTION	IES FILES
FLUSH	L1 - LOW OUTPUT	6.75W	712	105	47/53	DOWNLOAD
	L2 - STANDARD OUTPUT	10.25W	1094	107	47/53	DOWNLOAD
	L4 - HIGH OUTPUT	17.25W	1883	109	47/53	DOWNLOAD
1" DROP	L1 - LOW OUTPUT	7W	727	108	45/55	DOWNLOAD
	L2 - STANDARD OUTPUT	11W	1118	109	45/55	DOWNLOAD
	L4 - HIGH OUTPUT	18W	1923	111	45/55	DOWNLOAD
2" DROP	L1 - LOW OUTPUT	7W	720	107	43/57	DOWNLOAD
	L2 - STANDARD OUTPUT	11W	1109	108	43/57	DOWNLOAD
	L4 - HIGH OUTPUT	18W	1907	111	43/57	DOWNLOAD


ADDITIONAL IES FILES FOR THIS PRODUCT FOUND [HERE](#)

MOUNTING


GRID POWER FEED




GRID NON POWER FEED



DRYWALL POWER FEED



DRYWALL NON POWER FEED



RUN CHART (Begin measurements at start of run, in a clockwise direction)

STRAIGHT (S-___')

ORDERING EXAMPLE:

3G-4PLI-DI-L2-L2-30K-120-DIM-FL-WH-60-2C-S-8'




L SHAPE (L-___' x ___')


ORDERING EXAMPLE:

A - 3G-4PLI-DI-L2-L2-30K-120-DIM-FL-WH-60-2C-L-8'x6'

B - 3G-4PLI-DI-L2-L2-30K-120-DIM-FL-WH-60-2C-L-6'x8'



OR

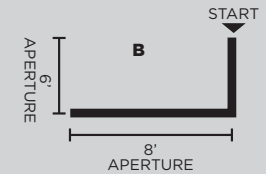


U SHAPE (U-___' x ___' x ___')


ORDERING EXAMPLE:

A - 3G-4PLI-DI-L2-L2-30K-120-DIM-FL-WH-60-2C-U-4'x8'x6'

B - 3G-4PLI-DI-L2-L2-30K-120-DIM-FL-WH-60-2C-U-6'x8'x4'



OR

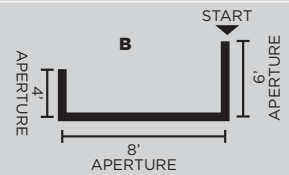

RECTANGLE (R-___' x ___')

ORDERING EXAMPLE:

3G-4PLI-DI-L2-L2-30K-120-DIM-FL-WH-60-2C-R-8'x6'

