

RECESSED CONTINUOUS SLOTS

3G-CSLED

CONTINUOUS SLOTS

TRIM, TRIMLESS & FLANGELESS

3G

LIGHTING



Trim



Trimless



Surface Madison



Pendant Informa

FEATURES

CONSTRUCTION

- Housing constructed in cold rolled steel and extruded aluminum. Powder coated black or white
- Designed for continuous runs in linear, right angle, square, and rectangular configurations
- Solid aluminum double gimbals. Adjustable and lockable
- Individual heads can slide 12" left or right within the channel. Easily adjusted in the field
- Anodized aluminum reflectors and extruded aluminum heatsinks

ELECTRICAL

- Standard 120-277V, 0-10V dimmable drivers with 100-1% dimming range
- 85% efficiency and 0.9 power factor
- Lutron and eldoLED driver options available with 100-1% dimming range
- Individual sections can be wired independently

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of > 50,000 hours
- Color consistency < 2 SDCM
- Standard (80+CRI). Optional (90+ and 97+CRI)
- LED modules carry a 5-year warranty
- Modules are field replaceable

LUMEN MAINTENANCE

- L70 at 60,000 hours

MOUNTING

- New construction housings suspended via 1/4" threaded rod or suspension cables
- Suitable for drywall, wood, concrete, and metal pan ceilings

LABELS

- ETL listed. Suitable for dry or damp locations

WARRANTY

- 5 Year limited warranty

RECESSED - CONTINUOUS SLOTS | 3G - CSLED | TRIM, TRIMLESS & FLANGELESS

3G
LIGHTING

PROJECT



TYPE

DATE

CATALOG #

APERTURE LENGTH

FOR OVERALL FIXTURE LENGTH ADD: 1.375" FOR TRIM & 2.625" FOR TRIMLESS

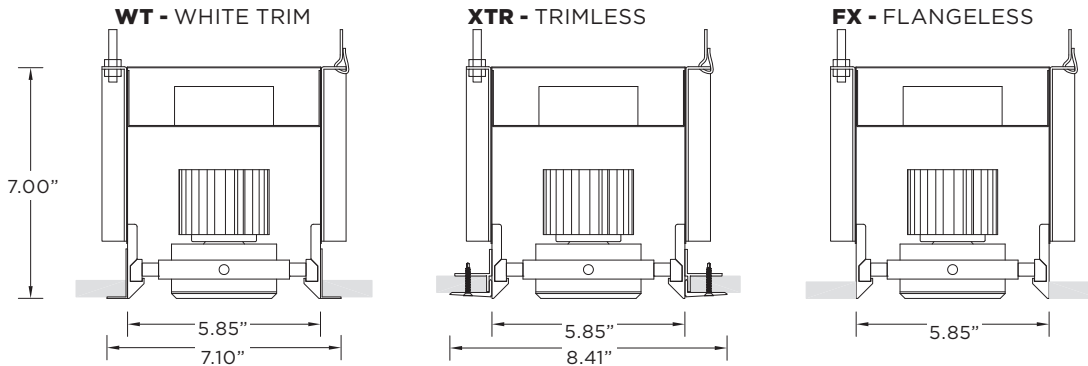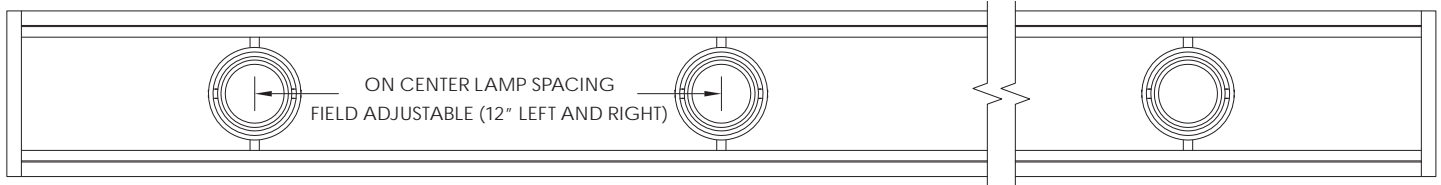

ORDERING INFORMATION

CAT. NO	LUMEN OUTPUT (PER FIXTURE HEAD)	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE	DRIVER
3G-CSLED	10 - 1000 LUMENS	S80 - 80+ CRI (STANDARD) H90 - 90+ CRI ¹ H97 - 97+ CRI ²	27K - 2700K	20D - 20°	120 - 120V 277 - 277V 347 - 347V (0-10V ONLY)	DIM - 0-10V (STANDARD 100%-1)
	15 - 1500 LUMENS		30K - 3000K	40D - 40°		DHL2 - LUTRON (ECO SYSTEM 100-1%)
	22 - 2200 LUMENS		35K - 3500K	60D - 60°		DALI - DALI (100-1%)
	30 - 3000 LUMENS		40K - 4000K			LE10 - FORWARD PHASE (100-10%) ³
	40 - 4000 LUMENS					LE - FORWARD PHASE (100-1%)
	50 - 5000 LUMENS					

3G-CSLED						
-----------------	--	--	--	--	--	--

FLANGE TYPE	GIMBAL FINISH	HOUSING	OPTIONS	LENGTH (FEET)	LAMP SPACING
XTR - TRIMLESS WT - WHITE TRIM FX - FLANGELESS	NG - NATURAL ALUMINUM BG - BLACK WG - WHITE	BK - BLACK WH - WHITE	2C - 2 CIRCUIT CP - CHICAGO PLENUM SF70 - SOFTENING LENS LS70 - LINEAR SPREAD HXB70 - BLACK HEXCELL LOUVER	S - ___' (STRAIGHT RUN) L - ___' X ___' (L-SHAPE) U - ___' X ___' X ___' (U-SHAPE) R - ___' X ___' (RECTANGLE/SQUARE)	12 - 12" 18 - 18" 24 - 24" XX - CUSTOM
			Maximum 3 optical accessories. See optical accessories page for more options	Available in 6" increments. See reference page	

--	--	--	--	--	--

ORDERING EXAMPLE: **3G-CSLED-15-S80-30K-40D-120-DIM-XTR-NG-BK-S-8'-12**

¹ 90+ CRI available up to 4000lm.
² 97+ CRI available up to 3000lm.
³ 100-10% forward phase driver available up to 1500lm

Copyright 2016 3G Lighting.
P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.



RECESSED CONTINUOUS SLOTS

3G-CSLED
CONTINUOUS SLOTS
 TRIM, TRIMLESS & FLANGELESS



PERFORMANCE CHARTS

80+ CRI (Based on 40° Beam Angle)

LUMEN OUTPUT	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W
1000 LUMENS	9.8W	982	100.4
1500 LUMENS	13.7W	1375	100.4
2200 LUMENS	20.7W	2079	100.4
3000 LUMENS	32.1W	2738	85.3
4000 LUMENS	37.8W	3853	101.9
5000 LUMENS	54.3W	4630	85.3

DOWNLOAD

90+ CRI (Based on 40° Beam Angle)

LUMEN OUTPUT	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W
1000 LUMENS	9.8 W	835	85.4
1500 LUMENS	13.7W	1169	85.4
2200 LUMENS	20.1W	1719	85.4
3000 LUMENS	32.1W	2406	75.0
4000 LUMENS	44.7 W	3409	76.3
5000LUMENS	N/A	N/A	N/A


DOWNLOAD

97+ CRI (Based on 40° Beam Angle)

LUMEN OUTPUT	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W
1000 LUMENS	9.8W	733	75.0
1500 LUMENS	15.6W	1173	75.0
2200 LUMENS	24.2W	1811	75.0
3000 LUMENS	37.2W	2792	75.0
4000LUMENS	N/A	N/A	N/A
5000LUMENS	N/A	N/A	N/A

DOWNLOAD


GIMBAL ADJUSTABILITY

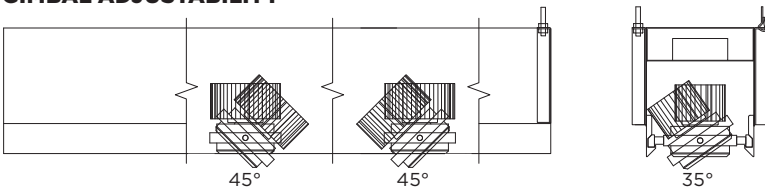


ADDITIONAL IES FILES FOR THIS PRODUCT FOUND [HERE](#)

MOUNTING


WT - WHITE TRIM

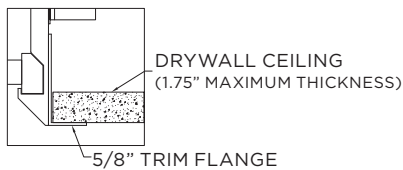

XTR - TRIMLESS

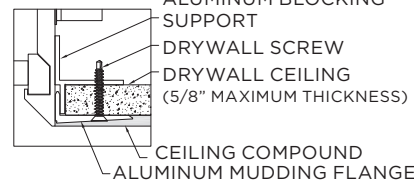

FX - FLANGELESS

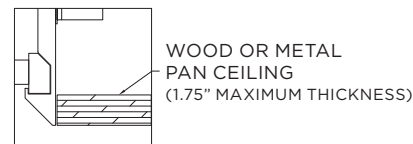

RUN CHART (Begin measurements at start of run, in a clockwise direction)

STRAIGHT (S-___')

ORDERING EXAMPLE:

3G-CSLED-15-S80-30K-40D-120-DIM-XTR-NG-BK-S-8'-12




L SHAPE (L-___' x ___')


ORDERING EXAMPLE:

A - 3G-CSLED-15-S80-30K-40D-120-DIM-XTR-NG-BK-L-8'X6'-12

B - 3G-CSLED-15-S80-30K-40D-120-DIM-XTR-NG-BK-L-6'X8'-12

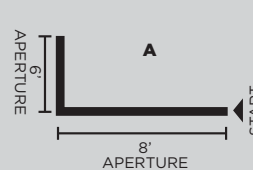

OR

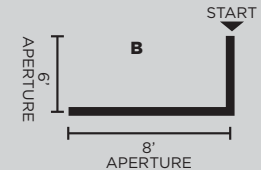


ORDERING EXAMPLE:


U SHAPE (U-___' x ___' x ___')

A - 3G-CSLED-15-S80-30K-40D-120-DIM-XTR-NG-BK-U-4'X8'X6'-12

B - 3G-CSLED-15-S80-30K-40D-120-DIM-XTR-NG-BK-U-6'X8'X4'-12

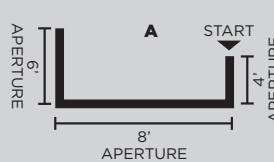

OR

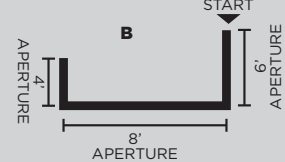

RECTANGLE (R-___' x ___')

ORDERING EXAMPLE:

A - 3G-CSLED-15-S80-30K-40D-120-DIM-XTR-NG-BK-R-8'X6'-12

