

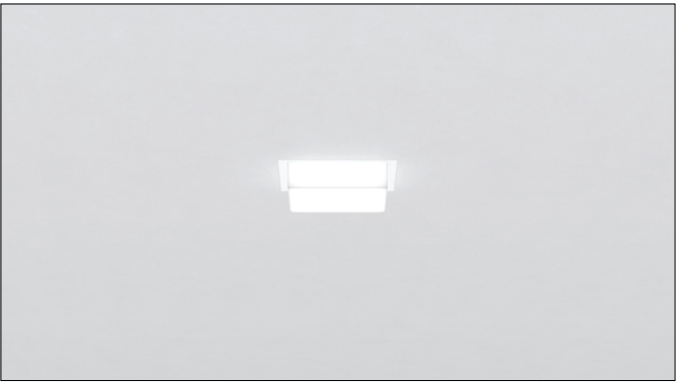




4/8/12” RECESSED KUBO
TRIM




THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)  SHALLOW HOUSING  BAR HANGERS	

INSTRUCTION KEY	INFORMATION
 ADDITIONAL  ATTENTION  POWER ON  POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)


1

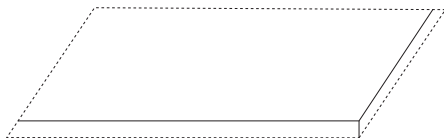

FIXTURE TYPE	CEILING HOLE SIZE
RKU4	5.425" x 5.425"
RKU8	9.625" x 9.625"
RKU12	13.263" x 13.263"


INSTALL CEILING BELOW FIXTURE

2

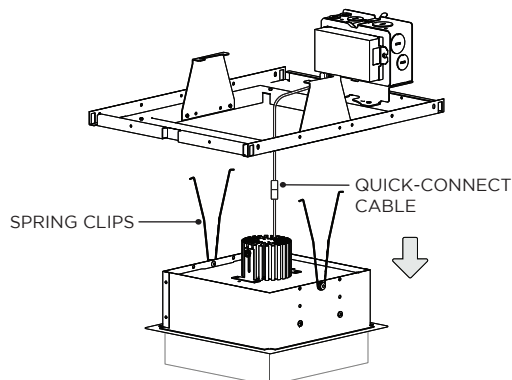


DISENGAGE SPRING CLIPS AND REMOVE TRIM ASSEMBLY FROM HOUSING

2A

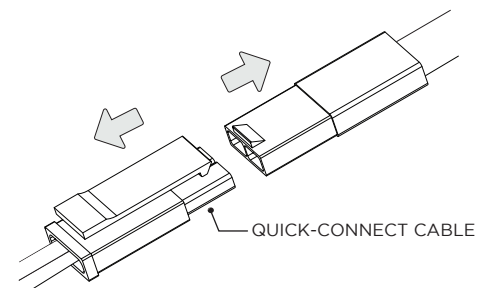


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

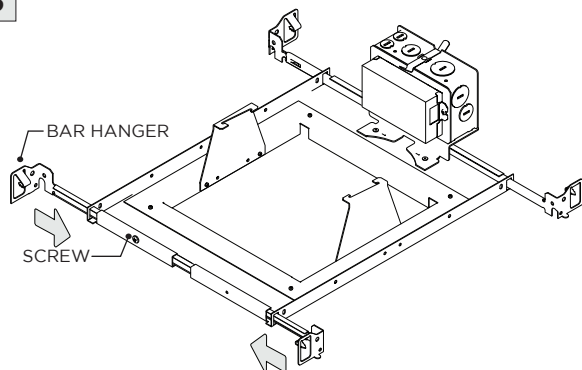


INSTALL BAR HANGERS & SECURE IN PLACE WITH SCREW

4

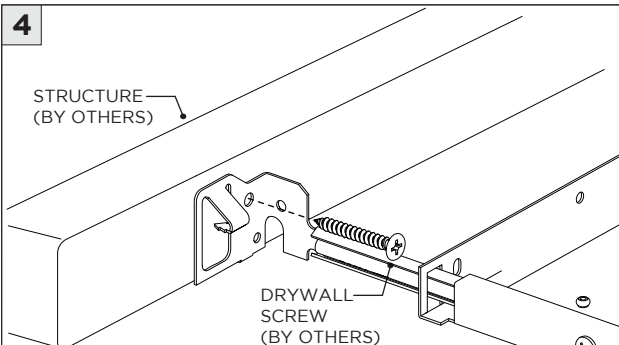

BAR HANGERS HAVE 14" to 26" EXTENSION
INSTALL CEILING BELOW FIXTURE HOUSING

5

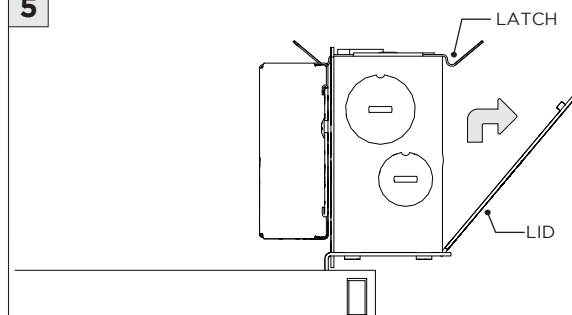


REMOVE ELECTRICAL BOX LID TO ACCESS WIRING

6


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS

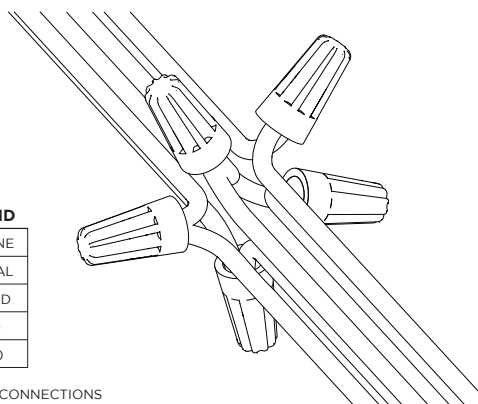


7

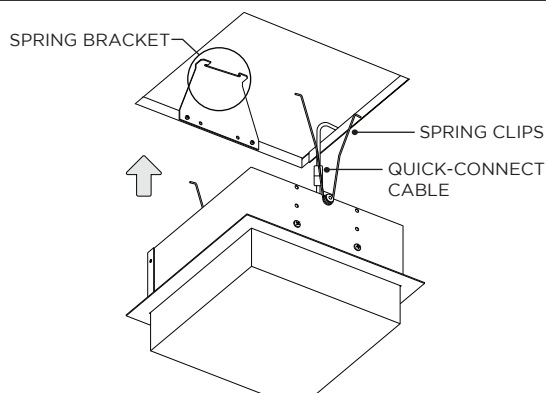

ENGAGE SPRING CLIPS WITH SPRING BRACKETS TO SECURE TRIM ASSEMBLY TO CEILING


7A

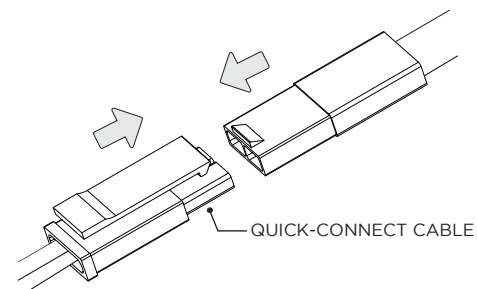

CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY


LED SERVICING - RKU4/8

1

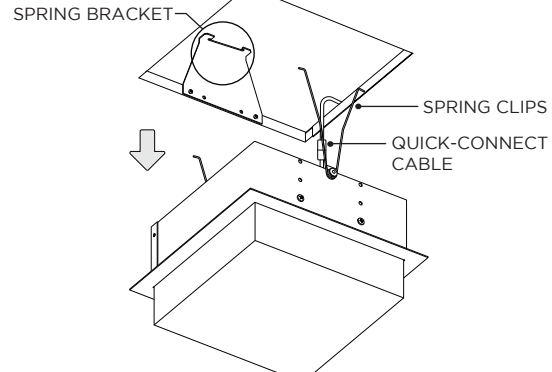


DISENGAGE SPRING CLIPS AND REMOVE TRIM ASSEMBLY FROM HOUSING

1A

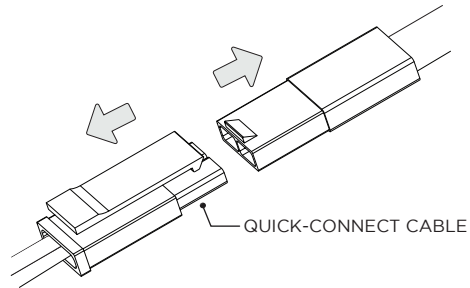


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

2

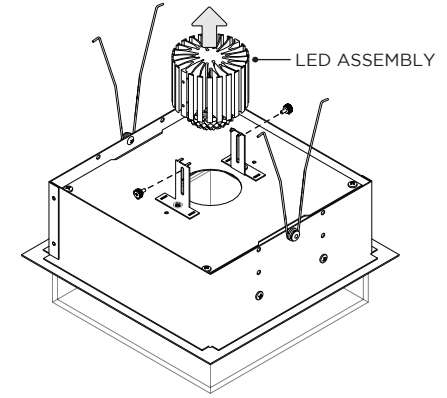


3

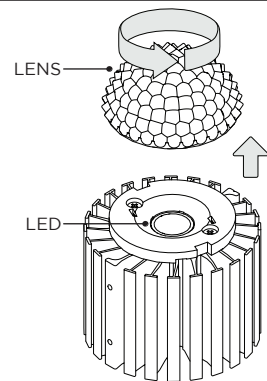

TWIST TO REMOVE LENS FROM LED ASSEMBLY
REPLACE LED ASSEMBLY


LED SERVICING - RKU12

1

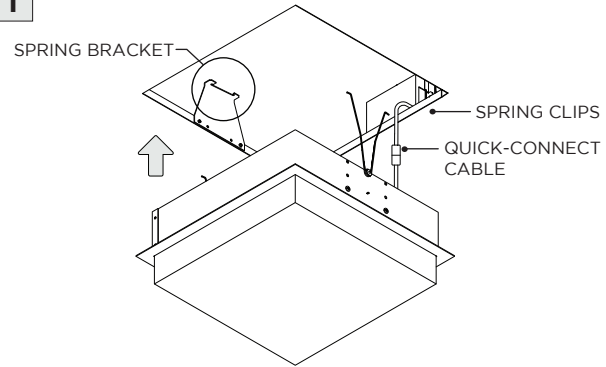


Disengage spring clips and remove trim assembly from housing

1A

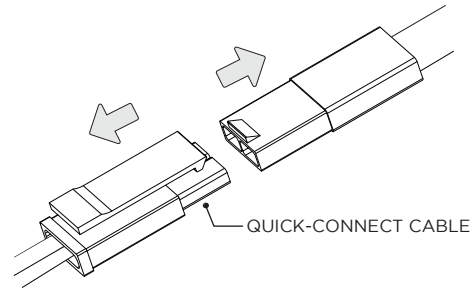

Disconnect quick-connect cable from LED assembly

2

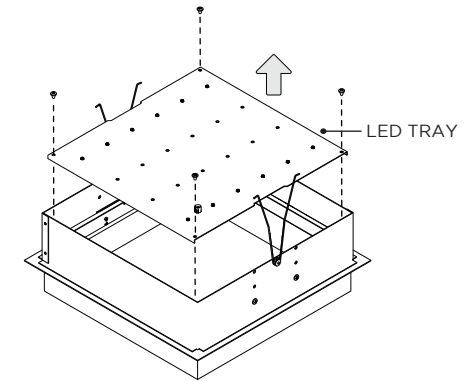

Remove and replace LED tray

DRIVER SERVICING

