3G-SRU24
24” SURFACE RUBO

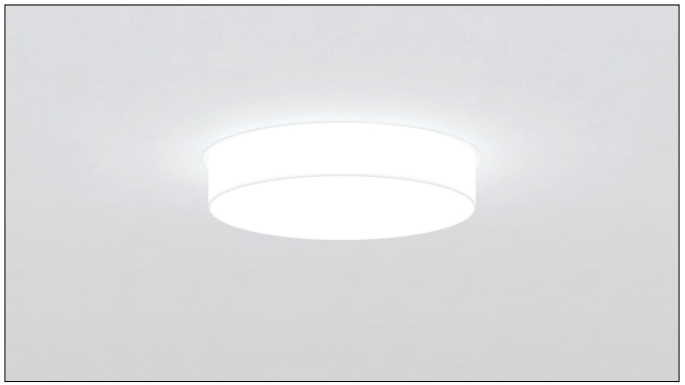

ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS



RUBO

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

3G LIGHTING

3G-SRU24
24” SURFACE RUBO

INSTALLATION INSTRUCTIONS

1

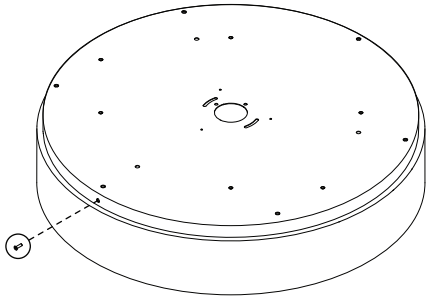

REMOVE SCREW ON SIDE OF FIXTURE

2

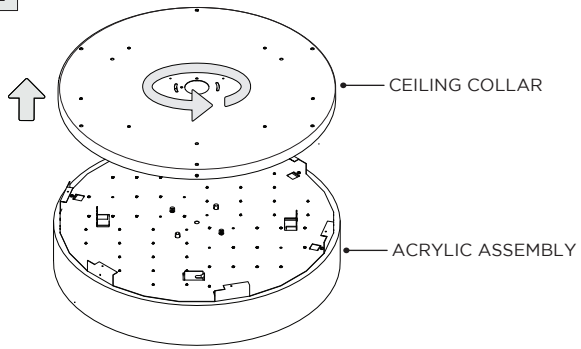

TWIST AND REMOVE CEILING COLLAR FROM ACRYLIC ASSEMBLY

2A

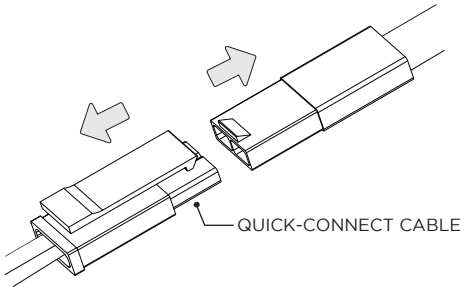

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS

3

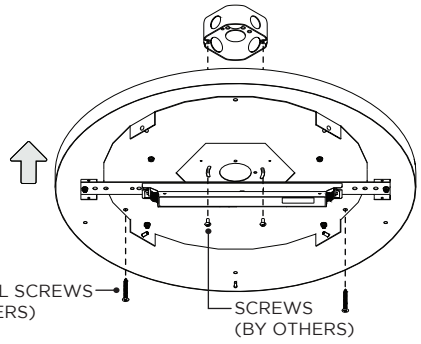

SECURE CEILING PLATE WITH DRYWALL SCREWS (BY OTHERS) FOR ADDITIONAL SUPPORT

3A

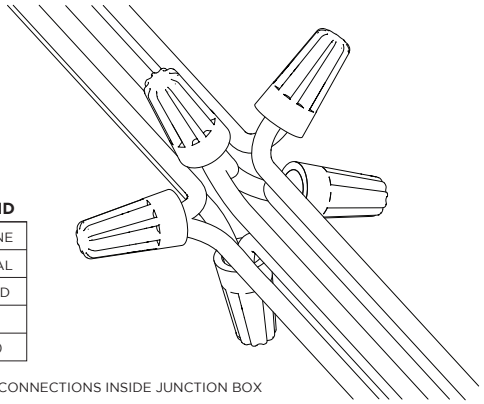

WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS INSIDE JUNCTION BOX

4

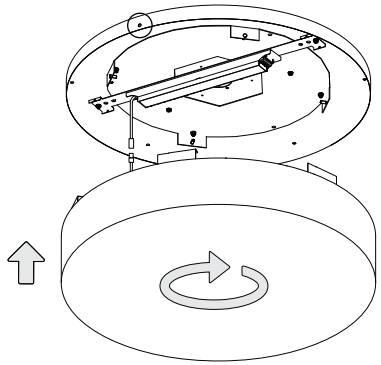

TWIST ON ACRYLIC ASSEMBLY AND LOCK IN PLACE WITH SCREW

4A

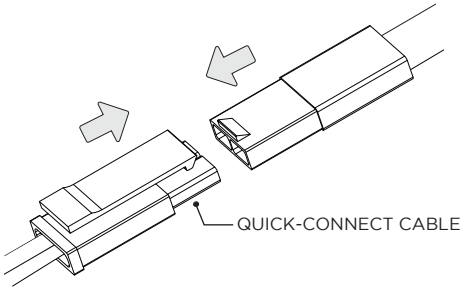

CONNECT QUICK-CONNECT CABLE TO LED BOARDS

DRIVER SERVICING

1

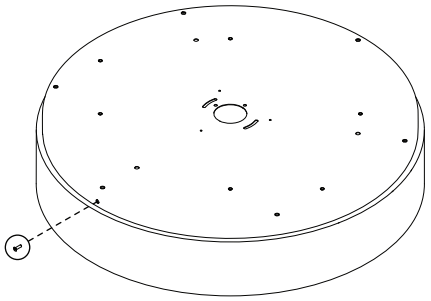

TURN OFF POWER FOR SERVICING
REMOVE SCREW ON SIDE OF FIXTURE

2

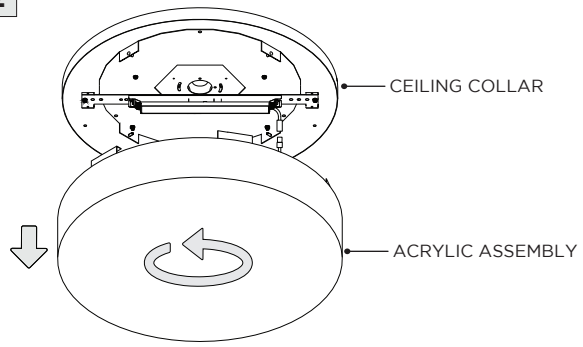

TWIST AND REMOVE ACRYLIC ASSEMBLY FROM CEILING COLLAR

2A

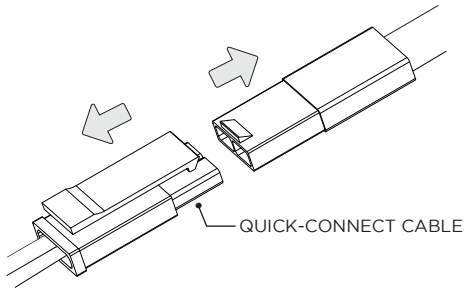

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS

3

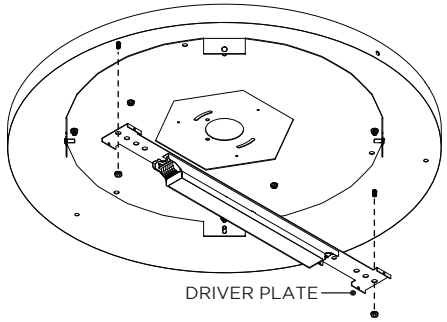

DISCONNECT AND REMOVE DRIVER PLATE

4

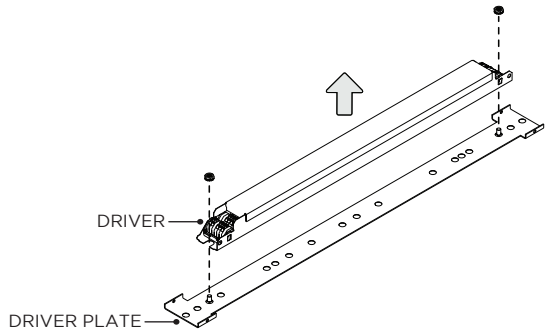

SERVICE DRIVER AND REASSEMBLE FIXTURE

LED SERVICING

1

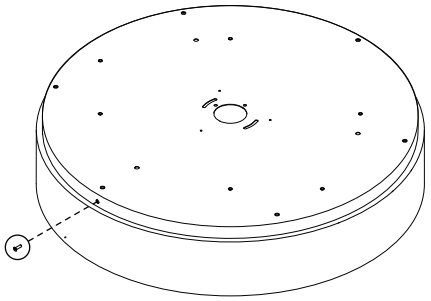

TURN OFF POWER FOR SERVICING
REMOVE SCREW ON SIDE OF FIXTURE

2

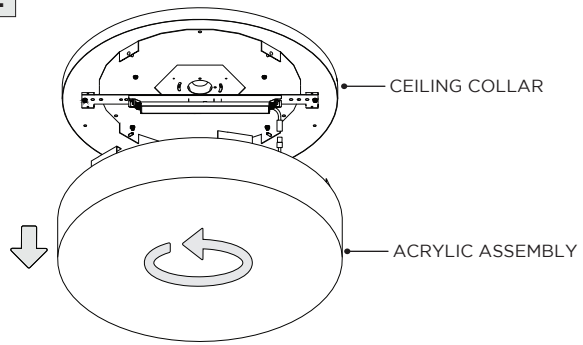

TWIST AND REMOVE ACRYLIC ASSEMBLY FROM CEILING COLLAR

2A

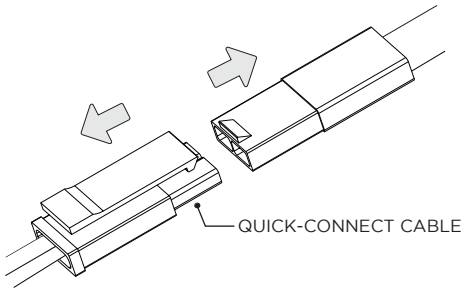

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS

3

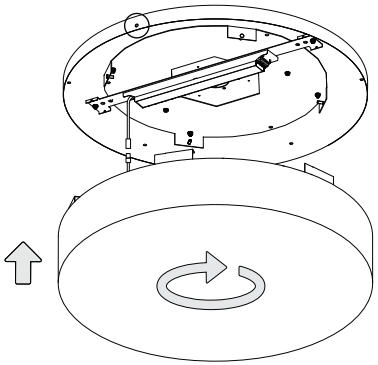

REPLACE ACRYLIC ASSEMBLY AND REASSEMBLE FIXTURE