
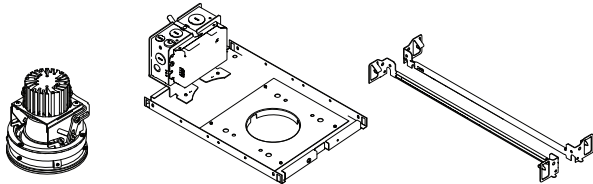
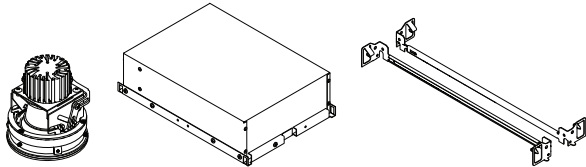


## 3.3"/4.5" ROUND ADJUSTABLE DOWNLIGHT

FLANGELESS MILLWORK









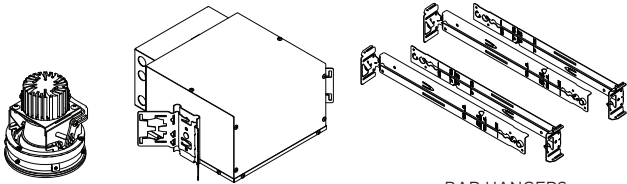


**i** THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


INCLUDED COMPONENTS	
<b>NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)</b>   LED INSERT    NEW CONSTRUCTION FRAME    BAR HANGERS	<b>SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)</b>   LED INSERT    SHALLOW HOUSING    BAR HANGERS
<b>NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)</b>   LED INSERT    NEW CONSTRUCTION HOUSING    BAR HANGERS (OPTIONAL)	

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
i ATTENTION	
⚡ POWER ON	
🔌 POWER OFF	

**NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)**

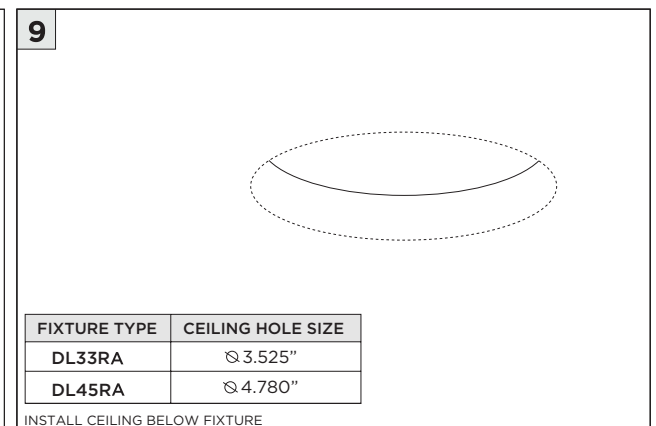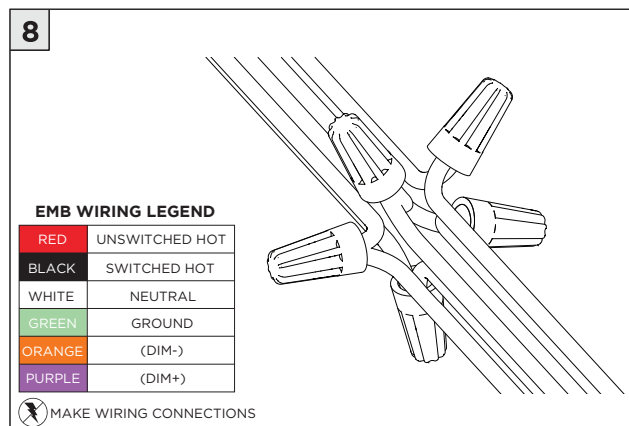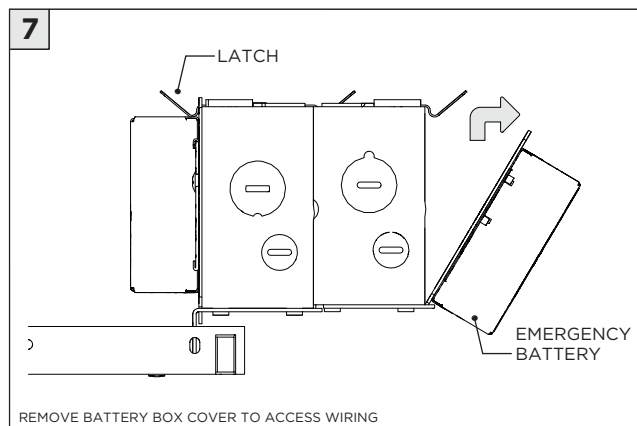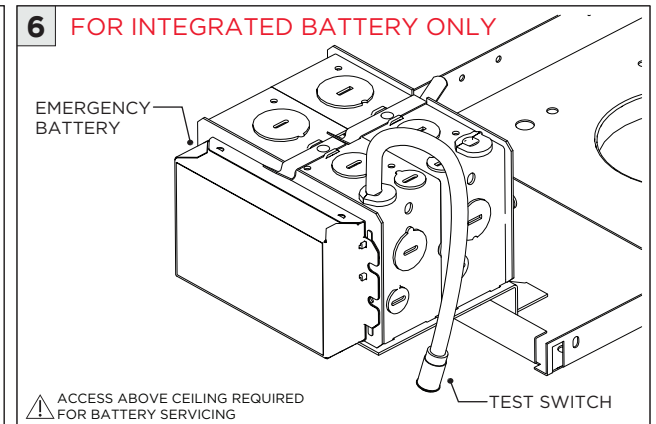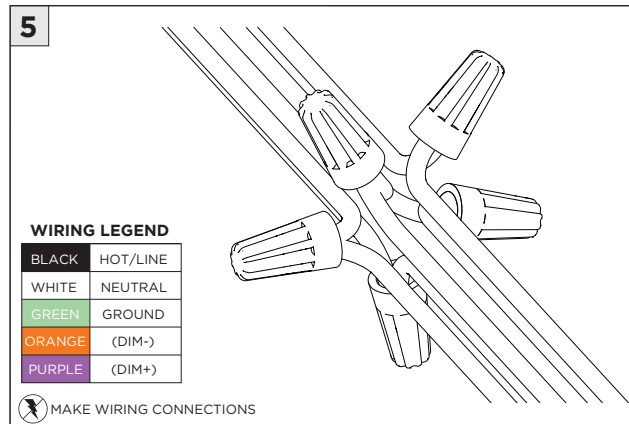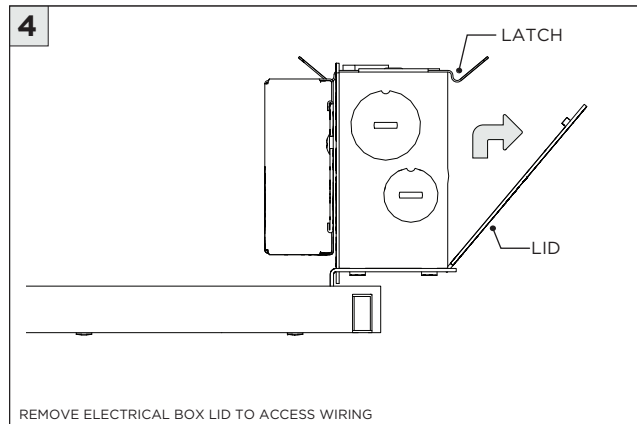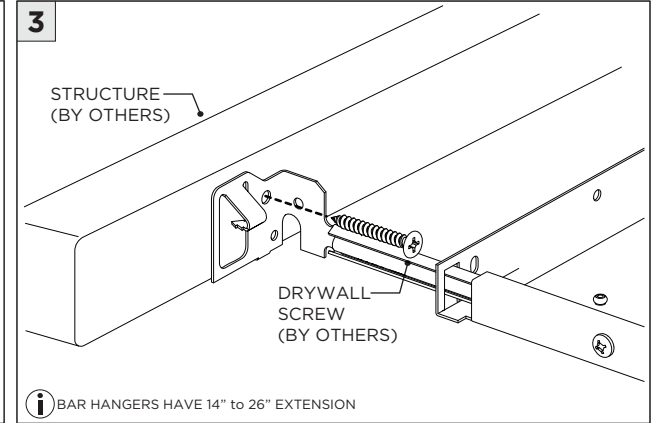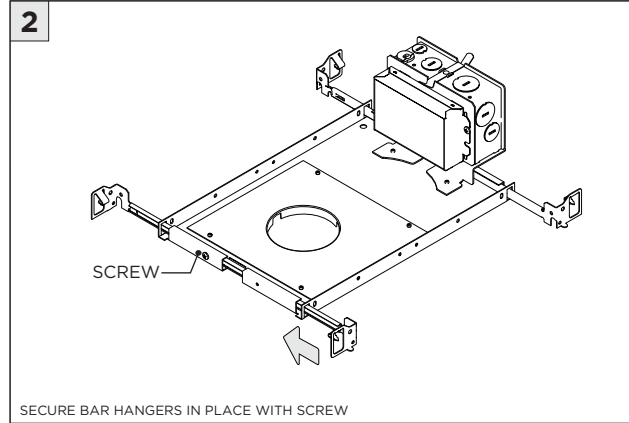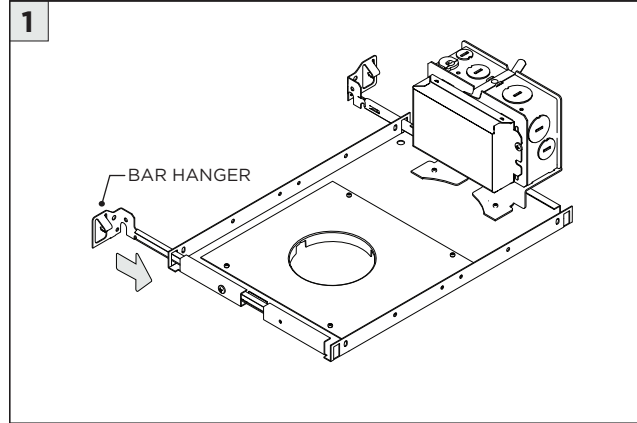


**10**

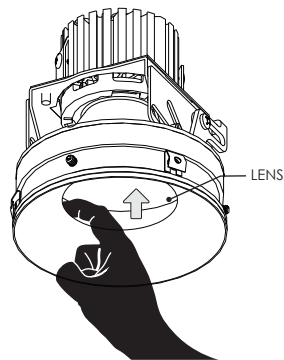


LIFT LENS AND DETATCH INSERT FROM LED ASSEMBLY

**10A**

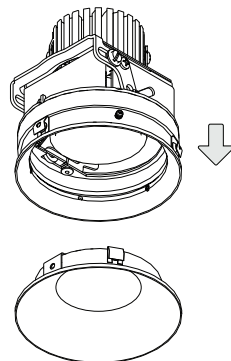


**11**

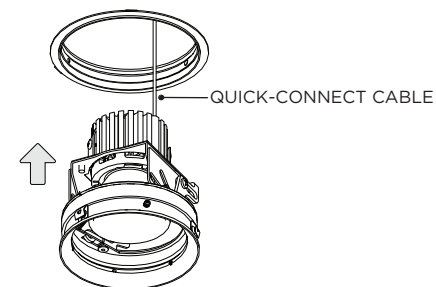


INSERT LED ASSEMBLY INTO CEILING

**11A**

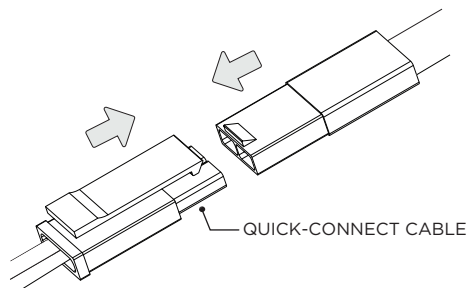


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

**12**

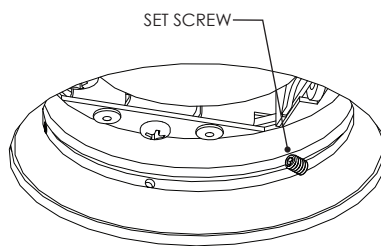

TIGHTEN 3 SET SCREWS INSIDE ADAPTER RING


**13**




REATTACH TRIM INSERT TO ADAPTER RING

**NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)**


**1 BAR HANGER INSTALLATION**  
(IF SUPPLIED BY 3G)

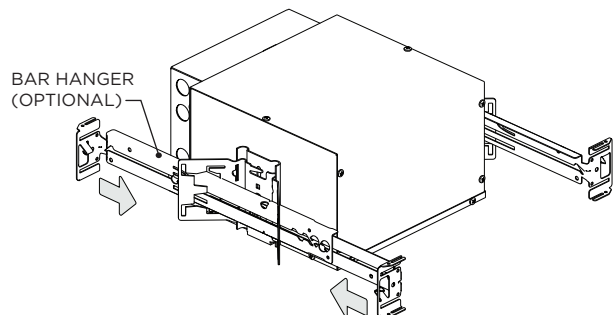


**1A**

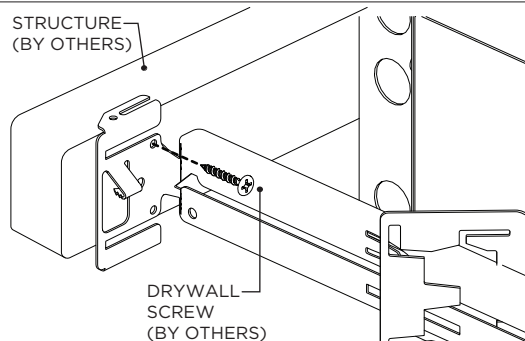

**2 OTHER BAR HANGER INSTALLATION**  
(NOT PROVIDED BY 3G)

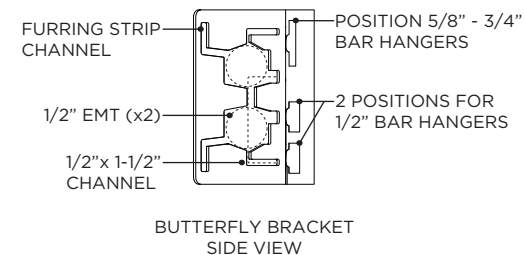

**3**

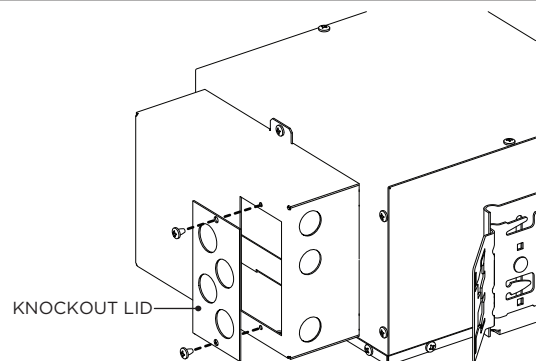


REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

**3A**

**WIRING LEGEND**

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS

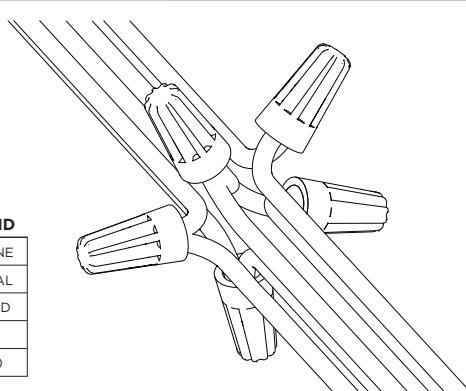


**4**



FIXTURE TYPE	CEILING HOLE SIZE
DL33RA	Ø 3.525"
DL45RA	Ø 4.780"


INSTALL CEILING BELOW FIXTURE

**5**

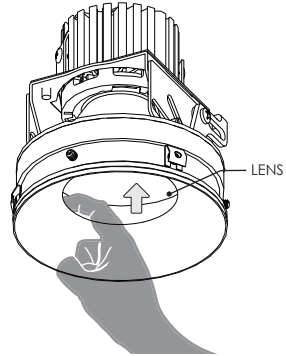


LIFT LENS AND DETATCH INSERT FROM LED ASSEMBLY

**5A**

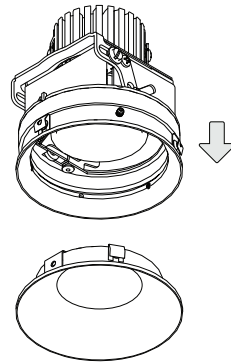


**6**

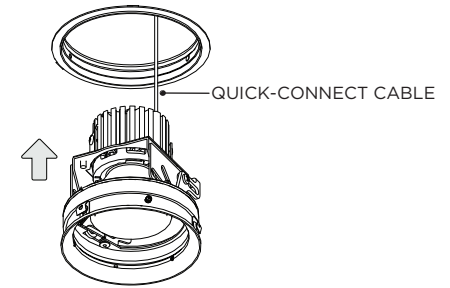


INSERT LED ASSEMBLY INTO CEILING

**6A**

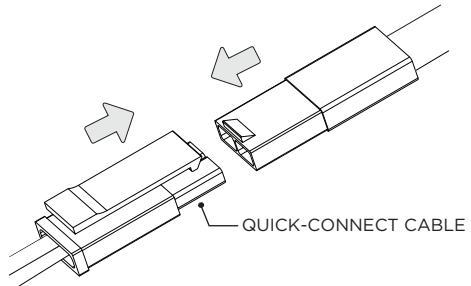


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

**7**

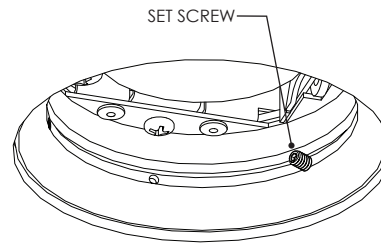







TIGHTEN 3 SET SCREWS INSIDE ADAPTER RING

**8**




REATTACH INSERT TO ADAPTER RING

**SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)**

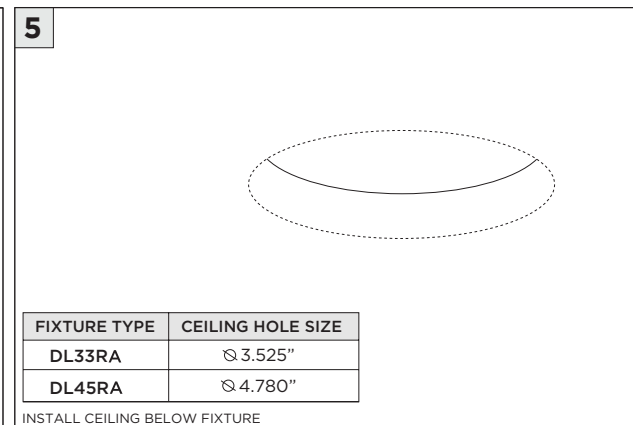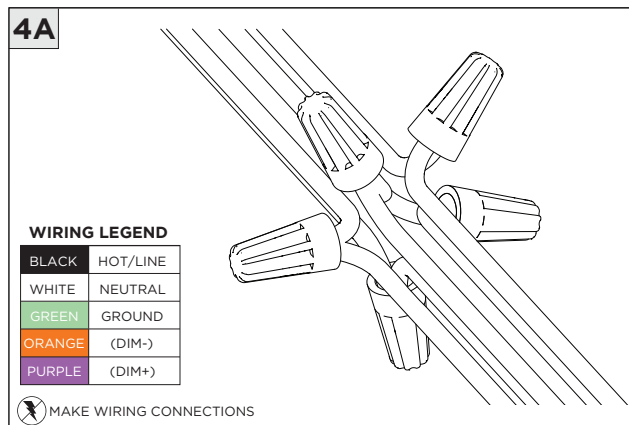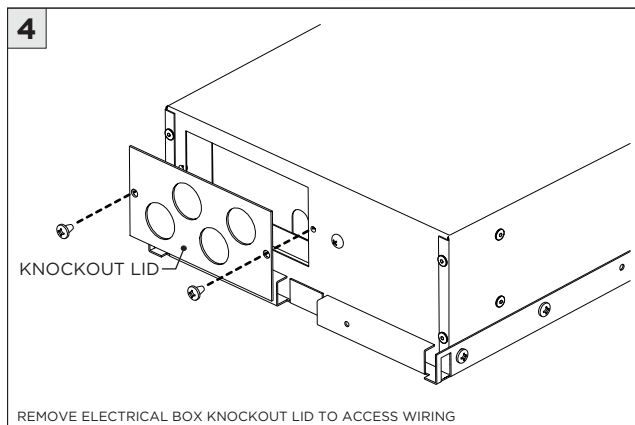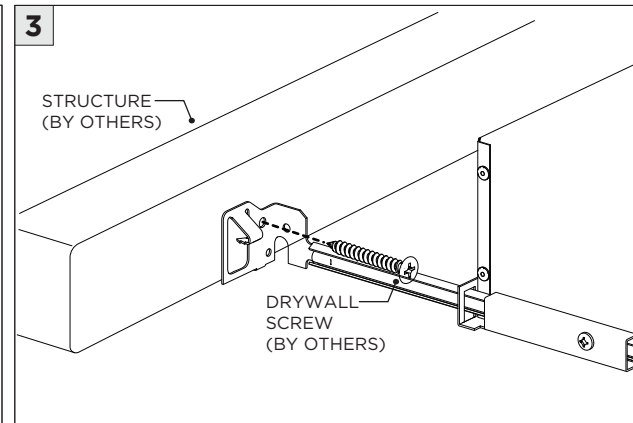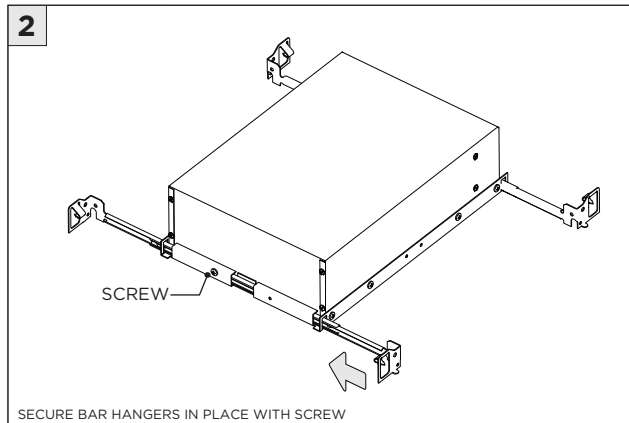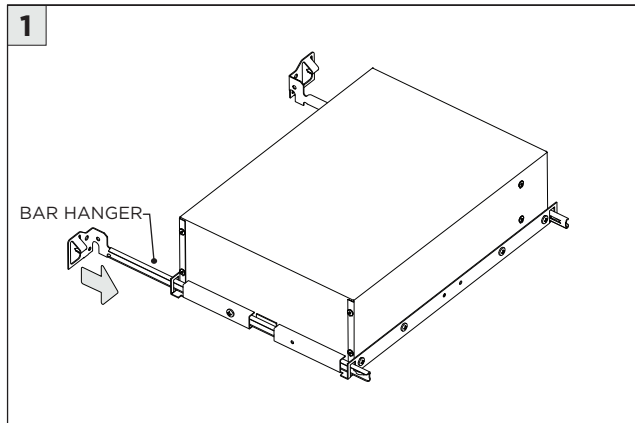


**6**

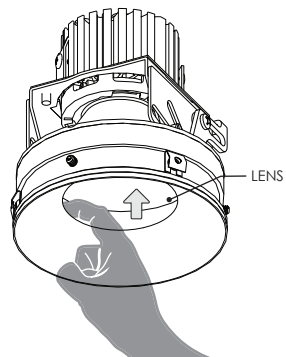


LIFT LENS AND DETATCH INSERT FROM LED ASSEMBLY

**7**

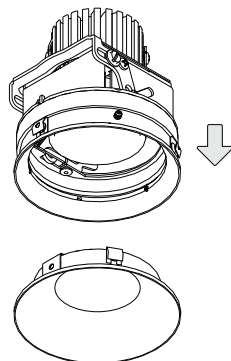


**8**

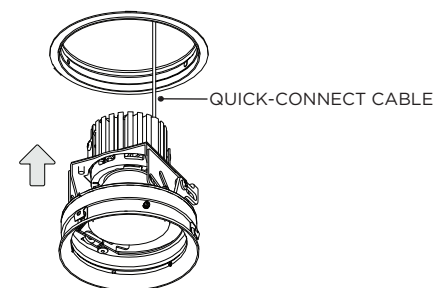


INSERT LED ASSEMBLY INTO CEILING

**8A**

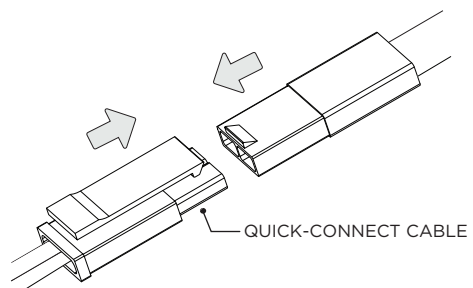


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

**9**

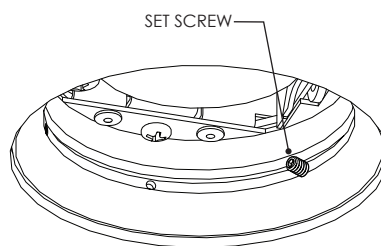

TIGHTEN 3 SET SCREWS INSIDE ADAPTER RING


**10**



REATTACH TRIM INSERT TO ADAPTER RING


**LED ADJUSTMENT**

**1**




LIFT LENS AND DETATCH INSERT FROM CEILING AS SHOWN

**1A**

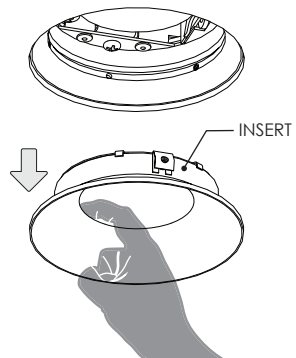


**2**

**ANGLE ADJUSTMENT**

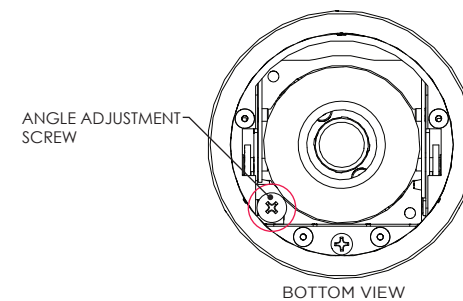


TURN SCREW TO ADJUST LED ANGLE

**2A**

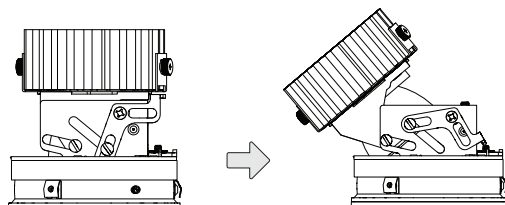


**3**

**ROTATION ADJUSTMENT**

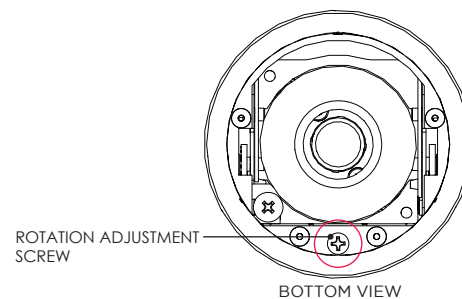

LOOSEN SCREW TO UNLOCK LED ASSEMBLY ROTATION

**3A**

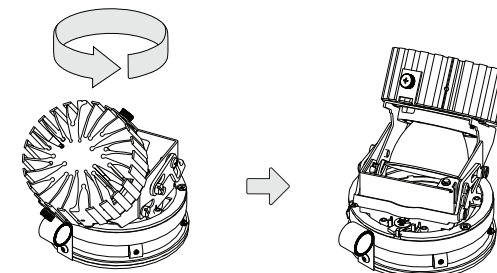


TIGHTEN SCREW AFTER ROTATING LED ASSEMBLY




**LED SERVICING**

**1**




LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

**1A**

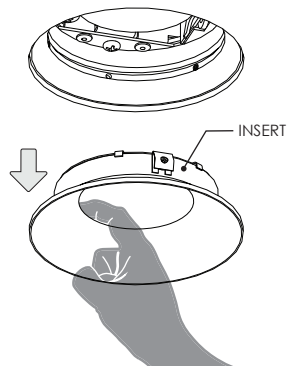


**2**

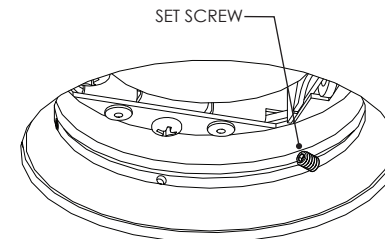


LOOSEN THREE SET SCREWS INSIDE ADAPTER RING

⚠ DO NOT FULLY REMOVE SET SCREWS FROM ADAPTER RING

**2A**

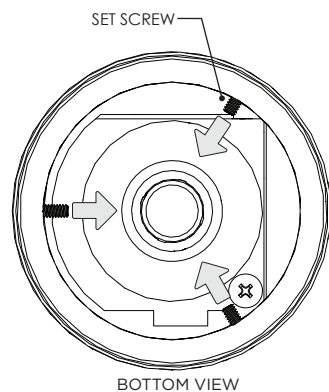


**3**




UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**4**

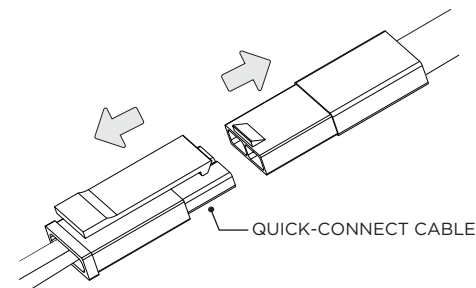


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

**5**

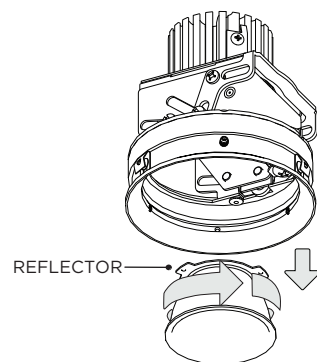


TWIST REFLECTOR TO REMOVE

**6**

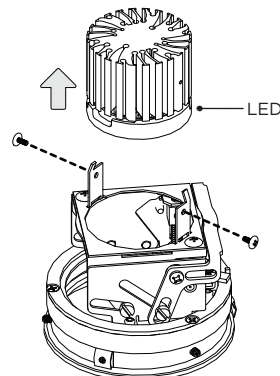


**DRIVER SERVICING**

**1 RMD - REMODEL**

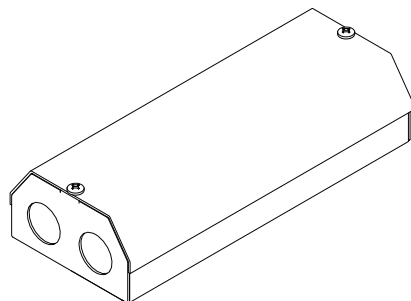


⚡ DISCONNECT POWER BEFORE SERVICING

**2**




LIFT LENS AND DETACH INSERT FROM ADAPTER RING

**2A**

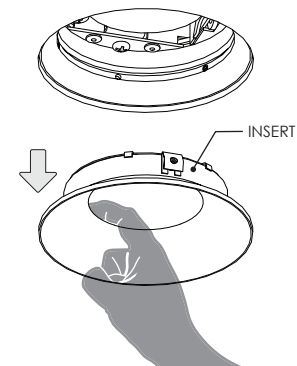


**3**

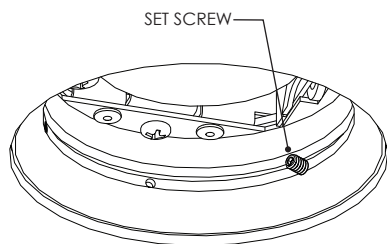

LOOSEN THREE SET SCREWS INSIDE ADAPTER RING


⚠ DO NOT FULLY REMOVE SET SCREWS FROM HOUSING

**3A**

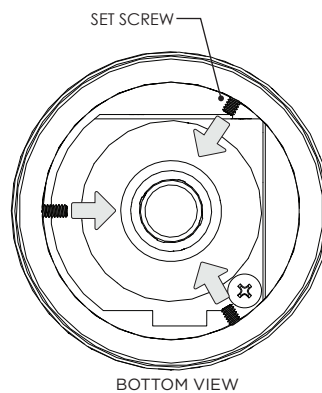


BOTTOM VIEW

**4**




UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**4A**

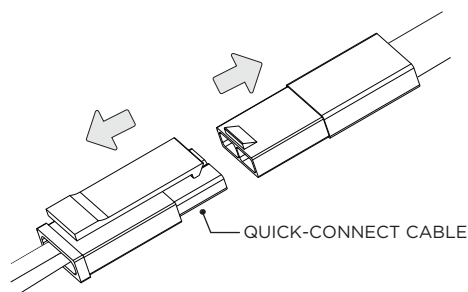


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**5**




**6**

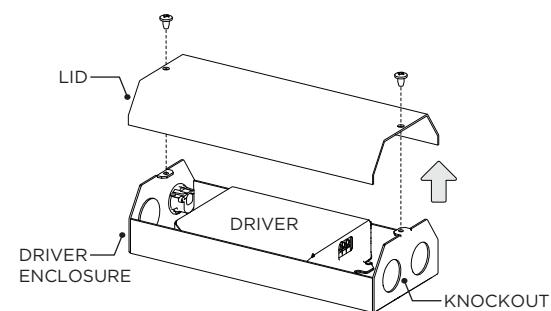


**DRIVER SERVICING**

**1 NCF - NEW CONSTRUCTION FRAME**

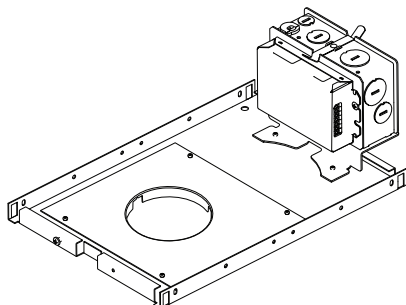


⚡ DISCONNECT POWER BEFORE SERVICING

**2**




LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

**2A**

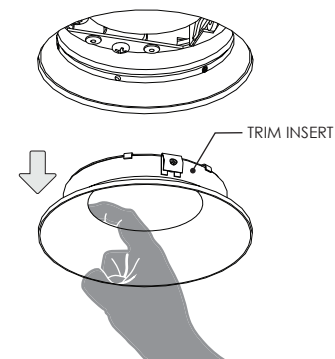


**3**

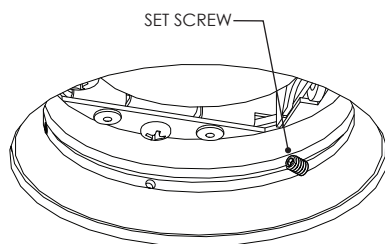

LOOSEN THREE SET SCREWS INSIDE ADAPTER RING


⚠ DO NOT FULLY REMOVE SET SCREWS FROM HOUSING

**4**

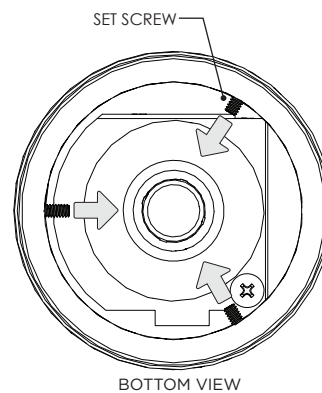


BOTTOM VIEW

**5**




UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**5A**

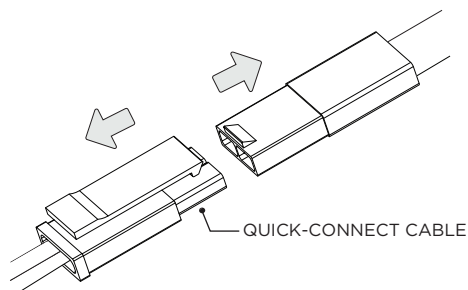






DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

**6**

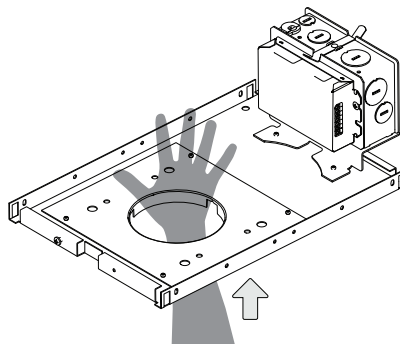


**7**

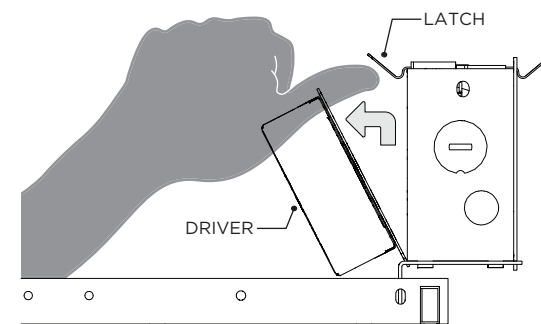

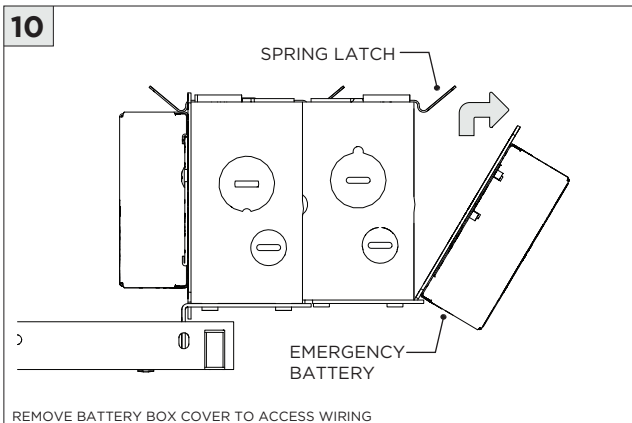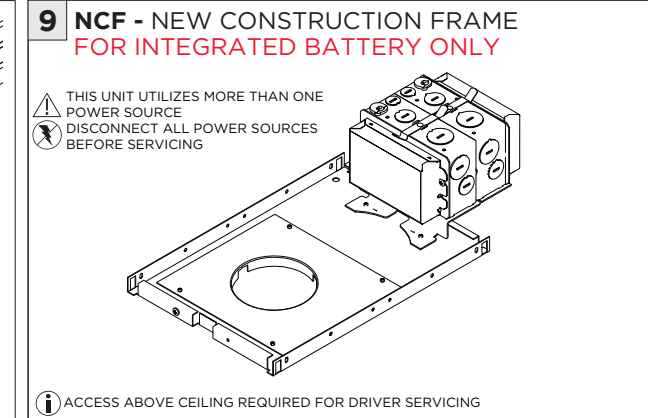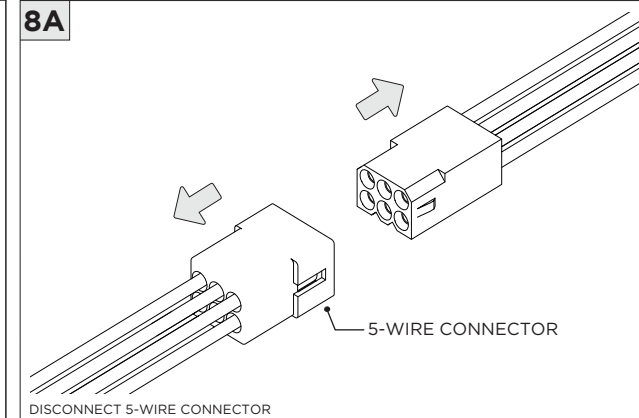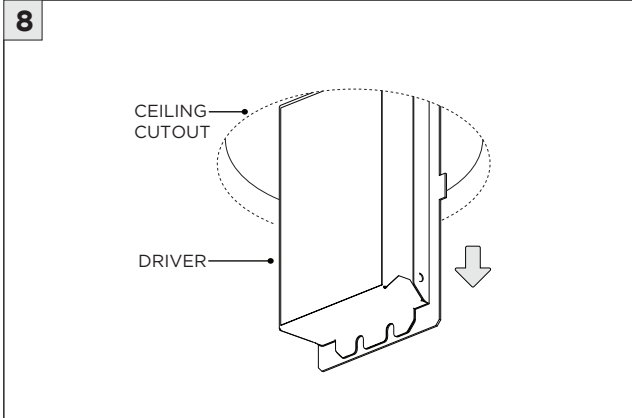


**DRIVER SERVICING**

**1 SH - SHALLOW HOUSING**

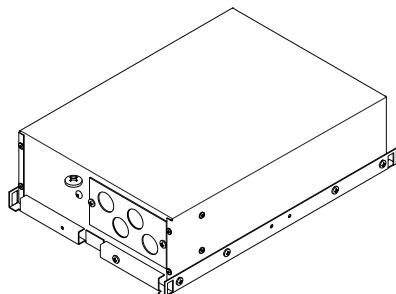


⚡ DISCONNECT POWER BEFORE SERVICING

**2**




LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

**2A**

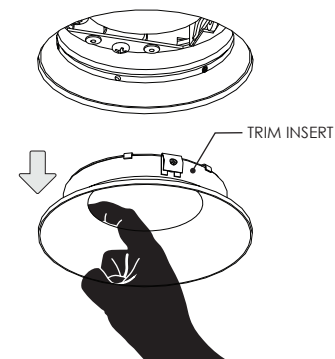


**3**

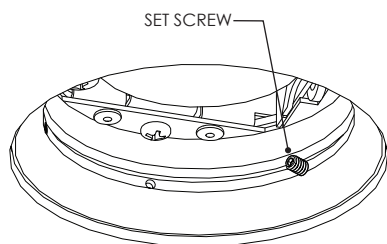


LOOSEN THREE SET SCREWS INSIDE ADAPTER RING

⚠ DO NOT FULLY REMOVE SET SCREWS FROM HOUSING

**4**

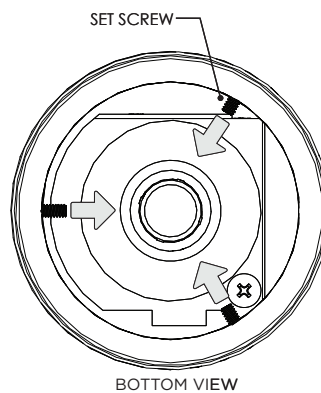


**5**




UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**5A**

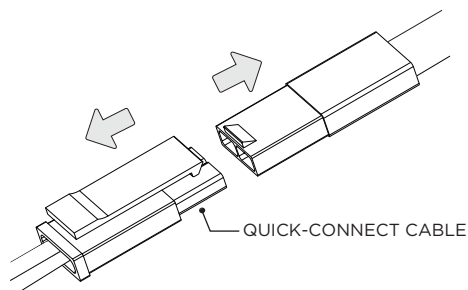


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


**6**

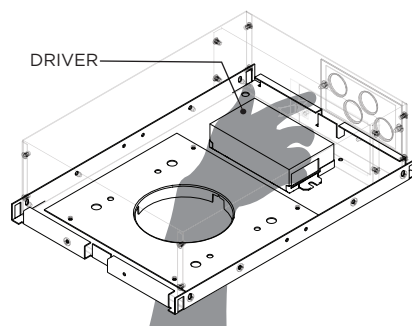

REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER


**7**

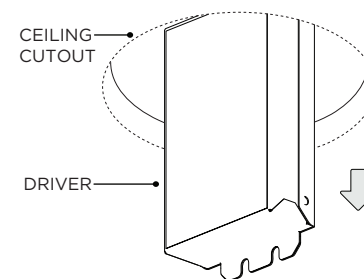

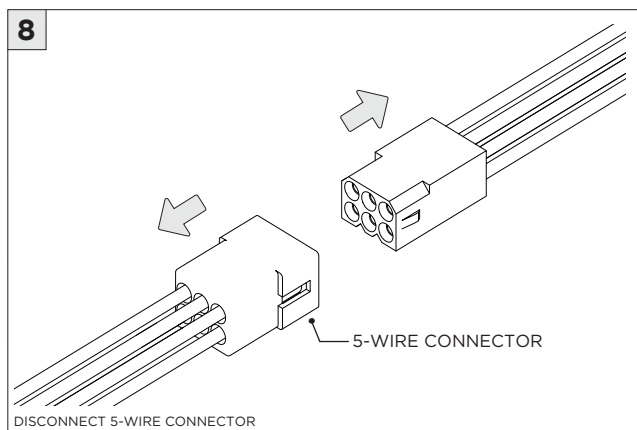


**DRIVER SERVICING**

**1 NC/IC - NEW CONSTRUCTION HOUSING**

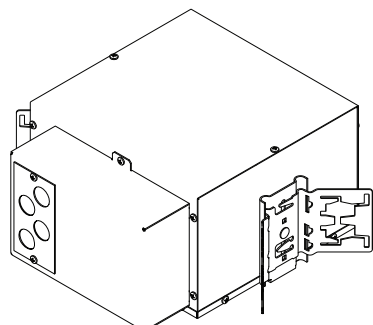


⚡ DISCONNECT POWER BEFORE SERVICING

**2**




LIFT LENS AND DETACH INSERT FROM ADAPTER RING


**2A**

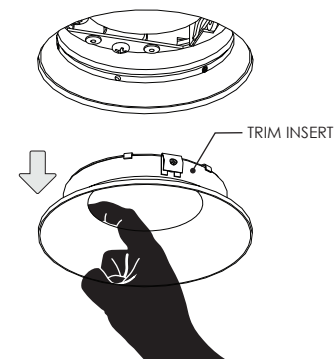

**3**

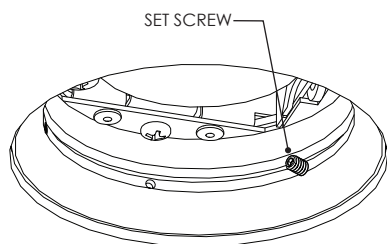


**4**

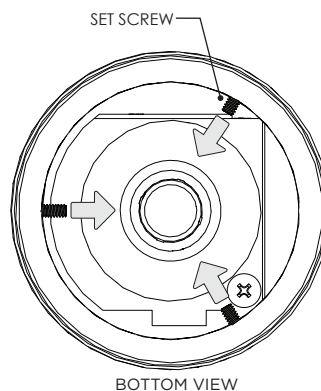


BOTTOM VIEW

**5**




UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**5A**

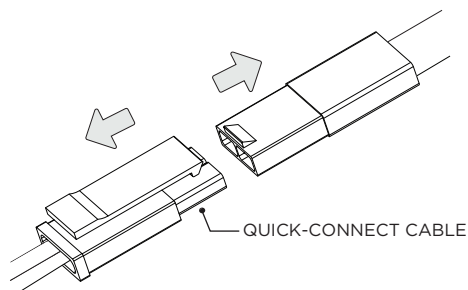

DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

**6**

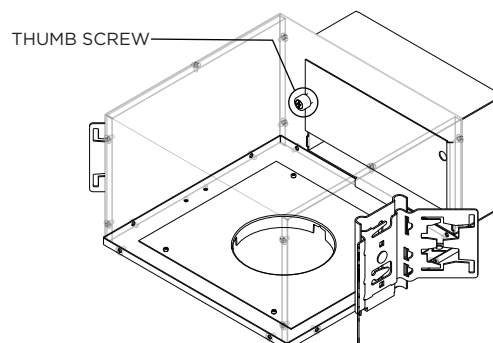

**7**

