

PENDANT KUBO MULTIPLE SQUARE

3G-PKU822
8" PENDANT

3G
LIGHTING



Pendant Kubo Multiple



Pendant Kubo Vertical



24" Pendant Kubo



Pendant Kubo Single

FEATURES

CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar and mounting canopy fabricated in steel with powder coated finish
- Modified configurations available upon request

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range.
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of 60,000 hours
- Color consistency < 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at 60,000 hours

MOUNTING

- Suitable for various ceiling applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners

FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY


- 5 Year limited warranty.

PROJECT

TYPE

DATE

CATALOG #

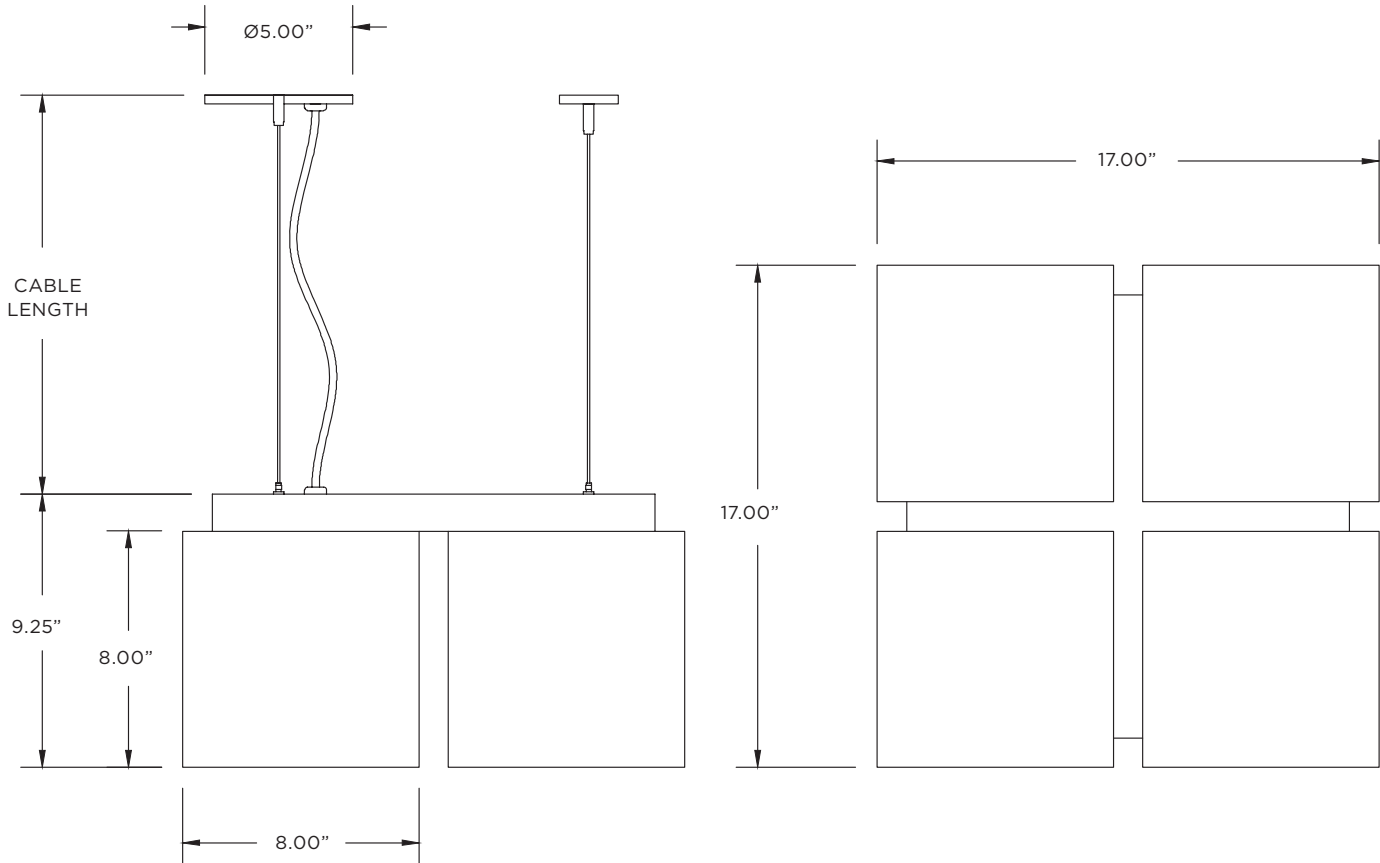

ORDERING INFORMATION

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH	CABLE LENGTH
3G-PKU822	L2 - STANDARD OUTPUT	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD 100-1%)	WH - WHITE (STANDARD)	60 - 60" (STANDARD)
		30K - 3000K	277 - 277V			
	L4 - HIGH OUTPUT	35K - 3500K	347 - 347V (0-10V ONLY)	DHL - LUTRON (3-WIRE-100-1%)	SV - SILVER	120 - 120"
		40K - 4000K		DHL2 - LUTRON (ECOSYSTEM-100-1%)		
3G-PKU822				DALI - DALI (100-1%)		

ORDERING EXAMPLE

3G-PKU822-L2-35K-120-DIM-WH-60

Copyright 2016 3G Lighting
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
 3G reserves the right to change, without notice, specifications or materials for product improvement.



PENDANT KUBO MULTIPLE SQUARE

3G-PKU822
8" PENDANT




PERFORMANCE CHART (based on 3500K)


LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
STANDARD OUTPUT	45W	4599	103	DOWNLOAD
HIGH OUTPUT	60W	6182	103	DOWNLOAD

MOUNTING


GRID POWER FEED




GRID NON POWER FEED



DRYWALL POWER FEED



DRYWALL NON POWER FEED



NOTES

Blank area for notes.