













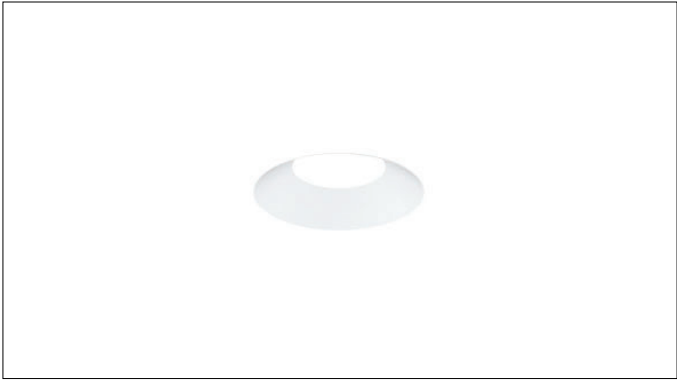














**3.3"/4.5" ROUND FIXED DOWNLIGHT**  
TRIMLESS




**i** THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS				
<b>RMD - REMODEL</b>				
				
LED INSERT	MUDDING FLANGE	DRIVER ENCLOSURE	BLOCKING SUPPORT PLATE	SUCTION CUP
<b>NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)</b>				
				
LED INSERT	MUDDING FLANGE	NEW CONSTRUCTION FRAME	BAR HANGERS	SUCTION CUP
<b>SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)</b>				
				
LED INSERT	MUDDING FLANGE	SHALLOW HOUSING	BAR HANGERS	SUCTION CUP
<b>NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)</b>				
				
LED INSERT	MUDDING FLANGE	NEW CONSTRUCTION HOUSING	BAR HANGERS (OPTIONAL)	SUCTION CUP

INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
 ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
 POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING


**RMD - REMODEL**

**1**



FIXTURE TYPE	CEILING HOLE SIZE
DL33RF	Ø 3.8125"
DL45RF	Ø 5.1250"

**2**

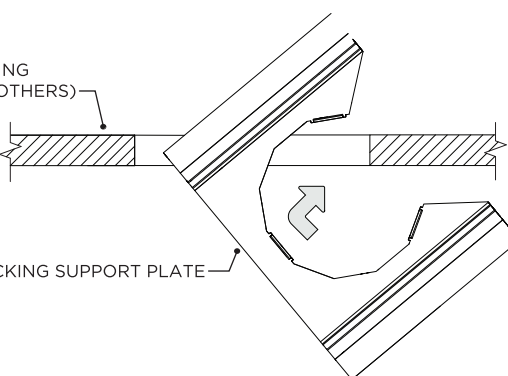


CEILING (BY OTHERS)

BLOCKING SUPPORT PLATE

ROTATE BLOCKING SUPPORT PLATE THROUGH CEILING CUTOUT


**3**



BLOCKING SUPPORT PLATE

CEILING CUTOUT

**4**

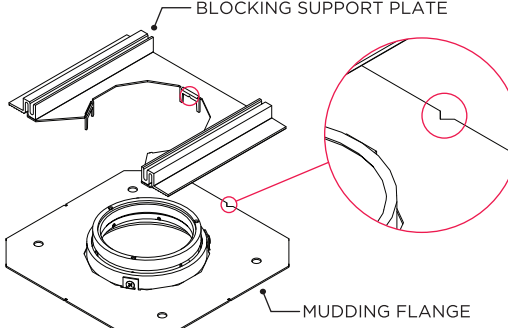


BLOCKING SUPPORT PLATE

MUDDING FLANGE

**i** BEFORE SECURING MUDDING FLANGE TO CEILING - ENSURE NOTCHES ON BLOCKING SUPPORT PLATE AND MUDDING FLANGE ARE ALIGNED

**5**

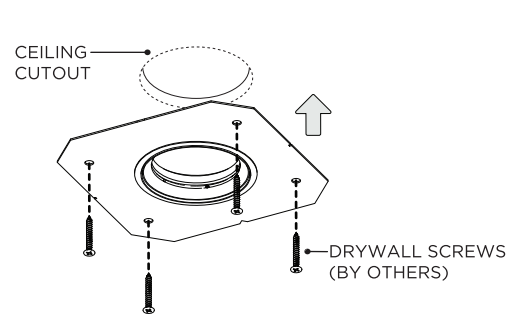


CEILING CUTOUT

DRYWALL SCREWS (BY OTHERS)

SECURE MUDDING FLANGE TO CEILING

**6**

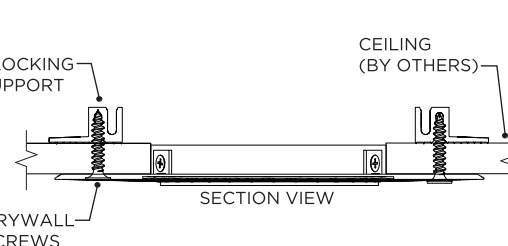


BLOCKING SUPPORT

CEILING (BY OTHERS)

DRYWALL SCREWS (BY OTHERS)


SECTION VIEW

**7**

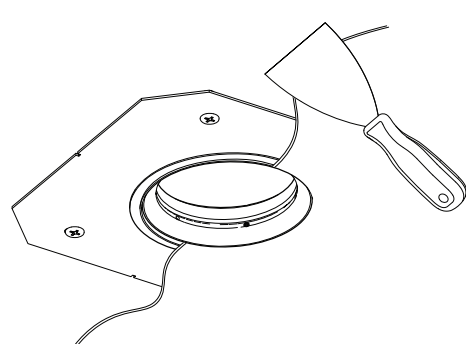

**i** APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING


**8 FOR DL33 ONLY**



SET SCREWS

LOOSEN SET SCREWS AND REMOVE INSERT RING FROM CEILING

**9**






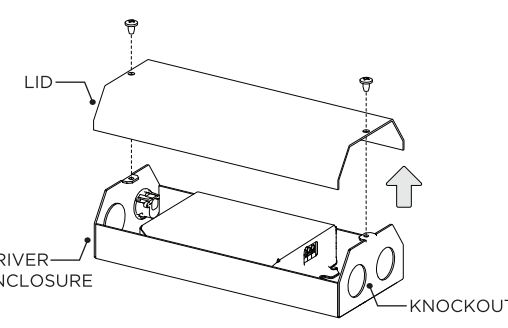


LID










DRIVER ENCLOSURE

KNOCKOUT


REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

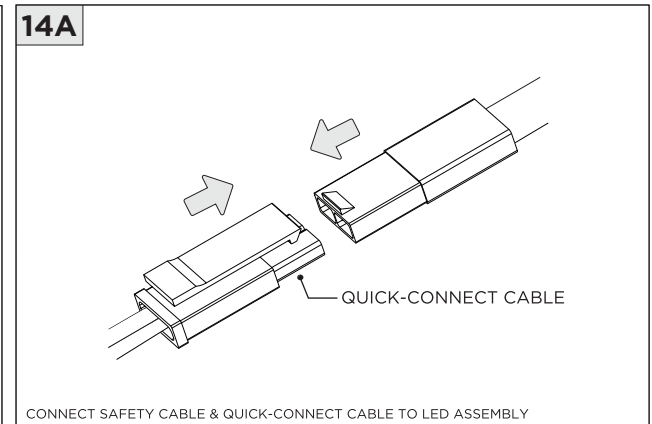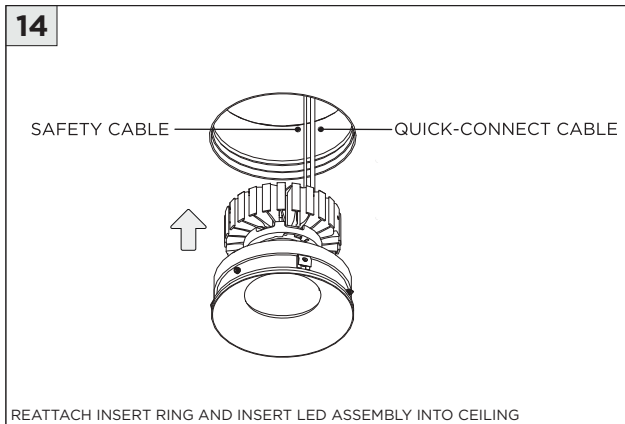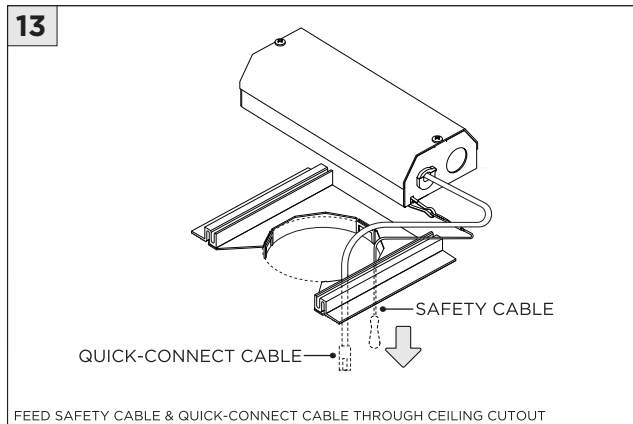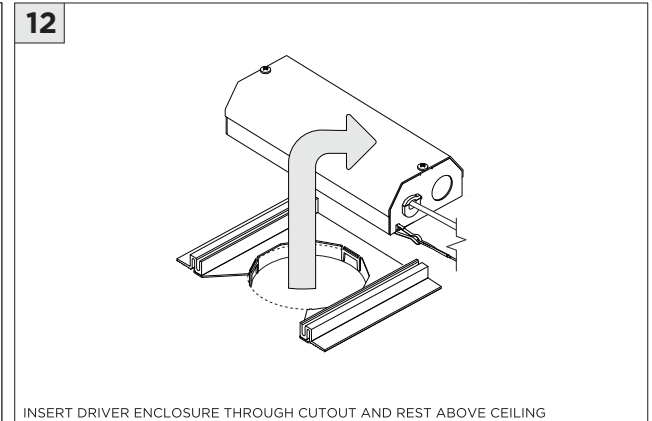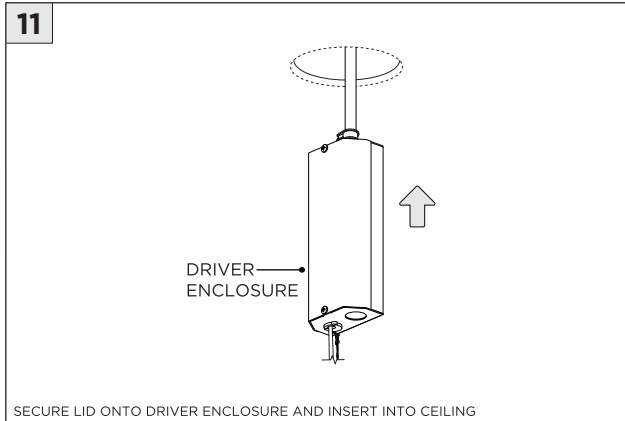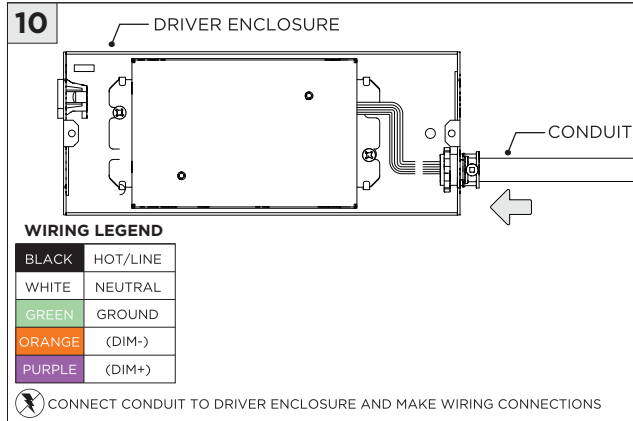

**NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)**

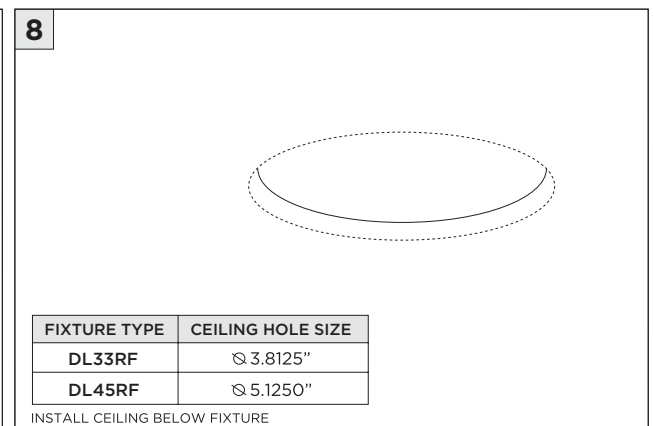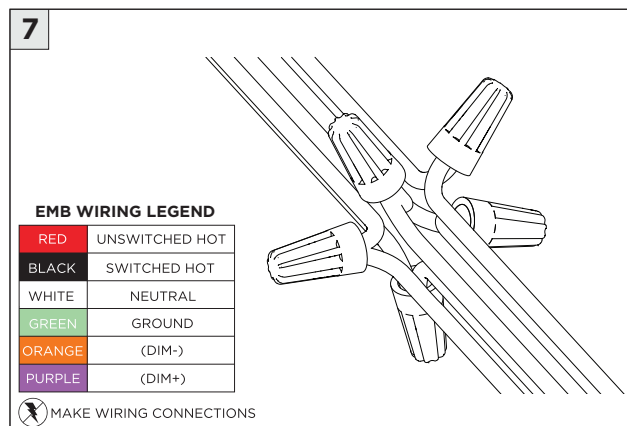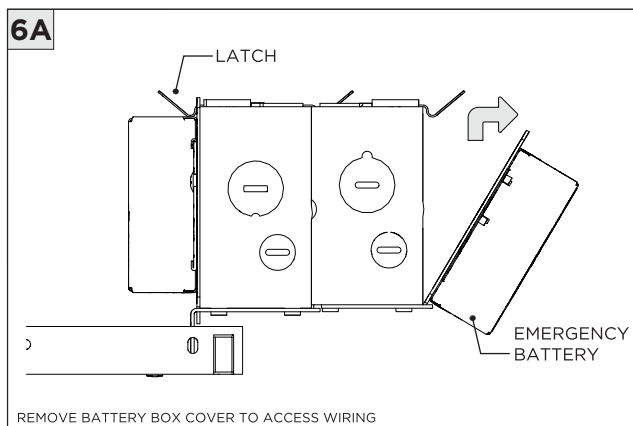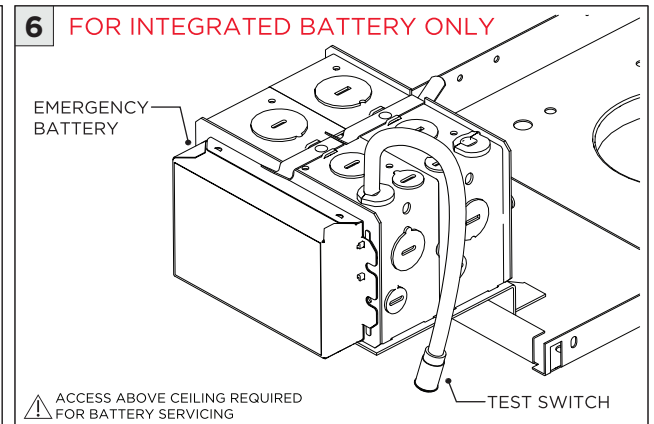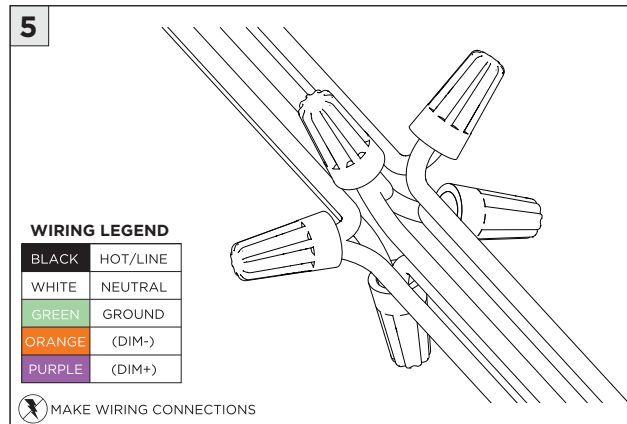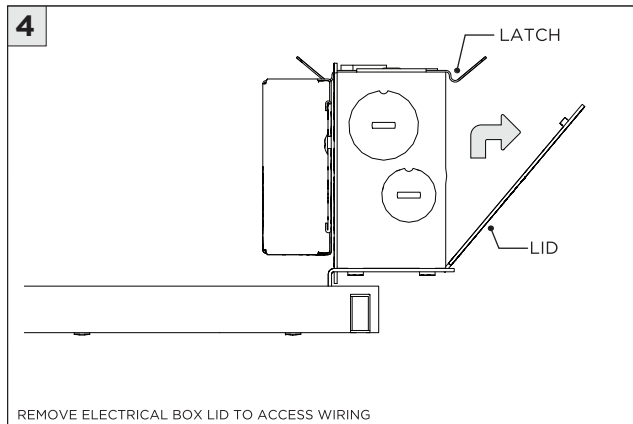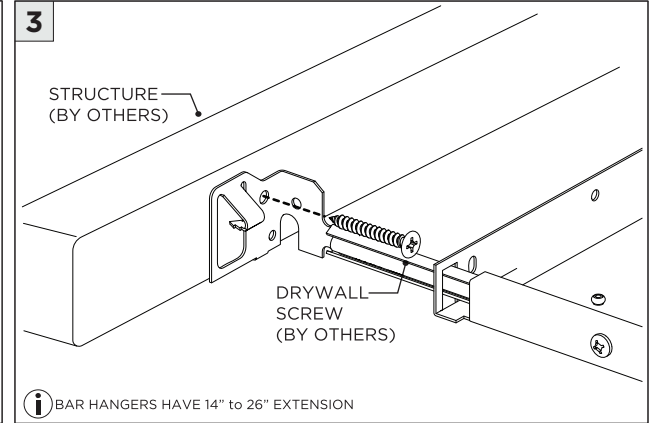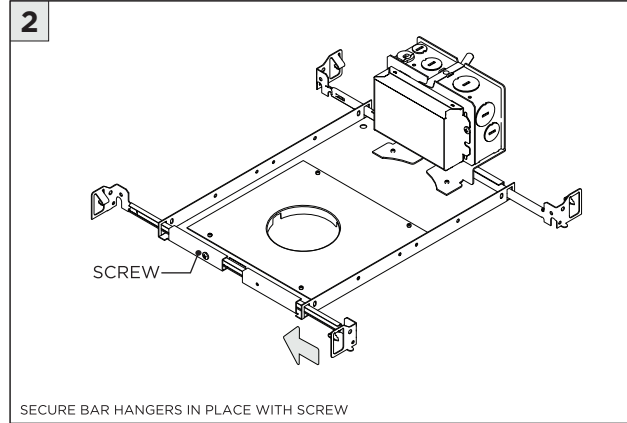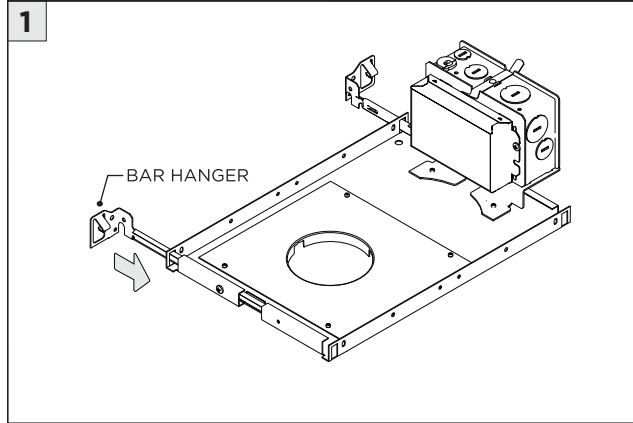


**9**

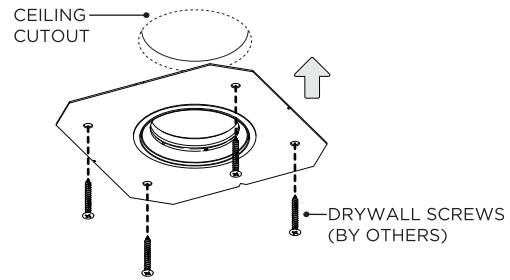


SECURE MUDDING FLANGE TO CEILING

**9A**

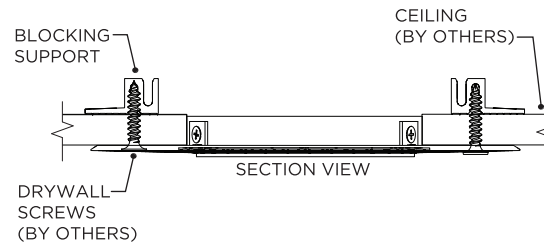


**10**

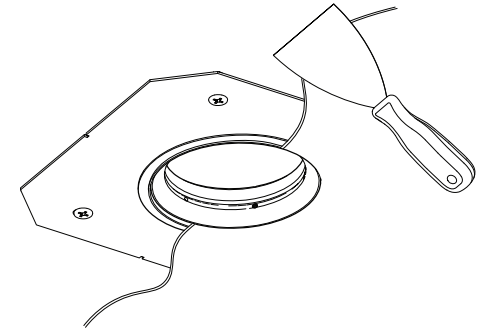


APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING

**11**

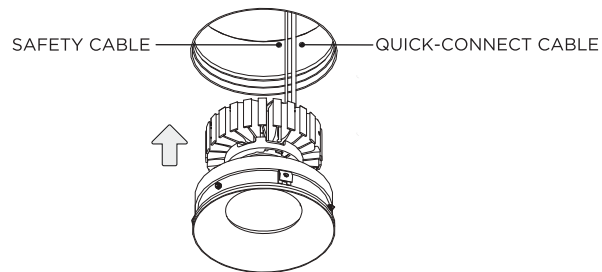










INSERT LED ASSEMBLY INTO CEILING

**11A**

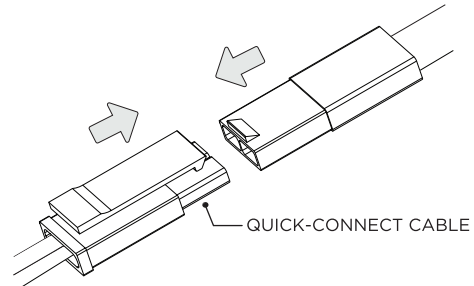


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

**SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)**

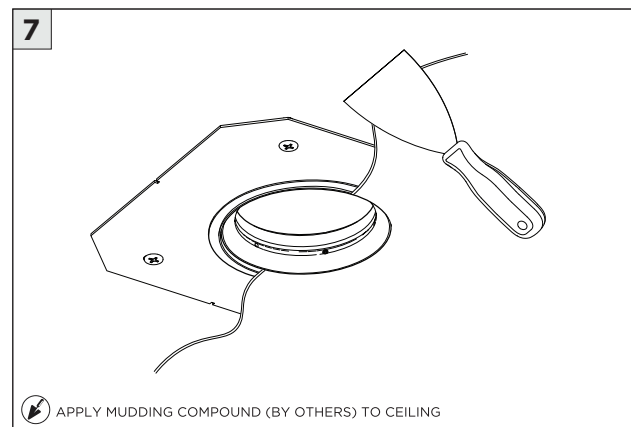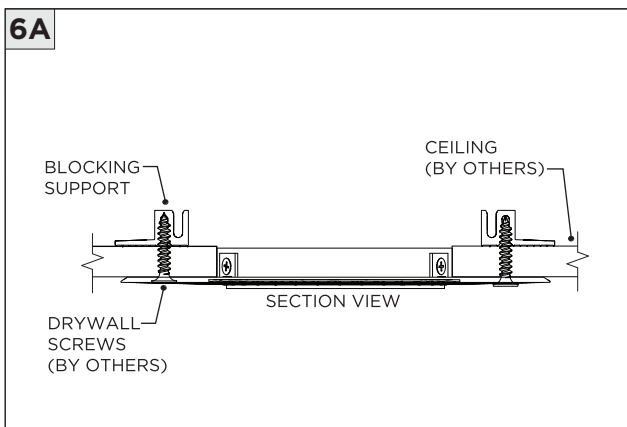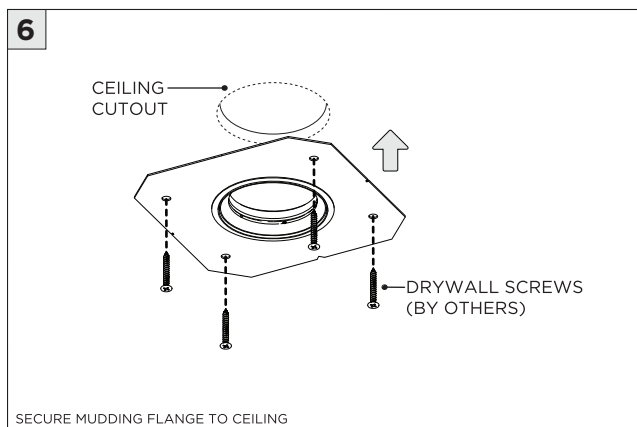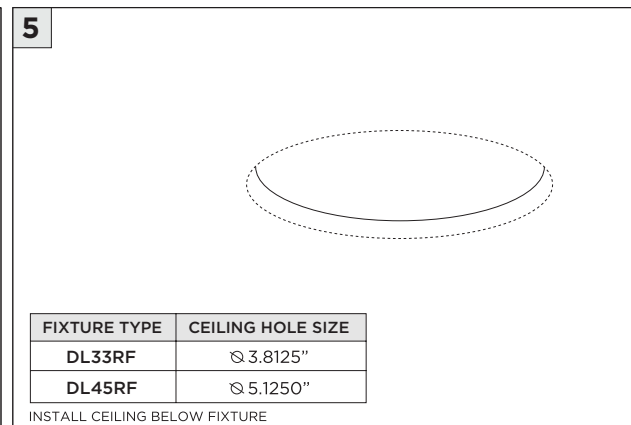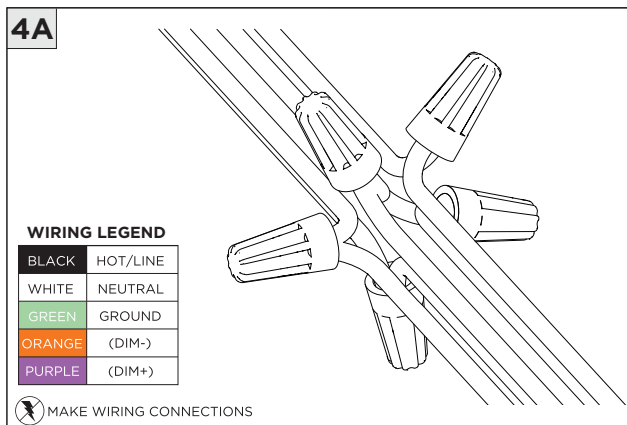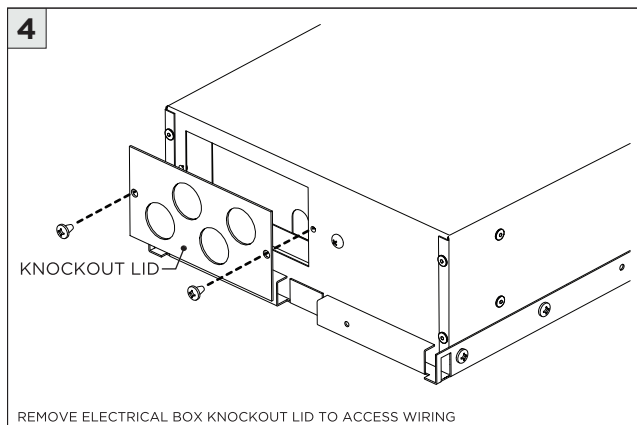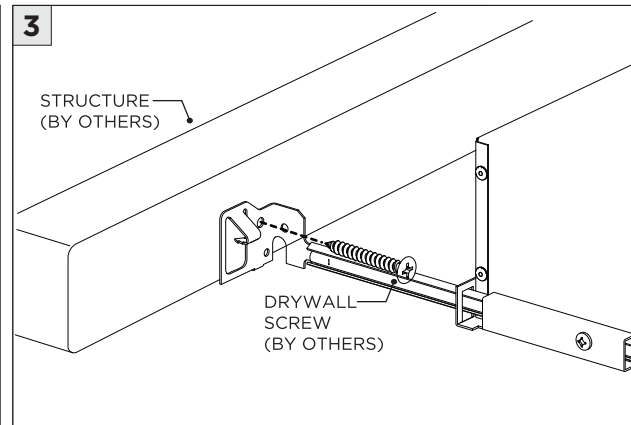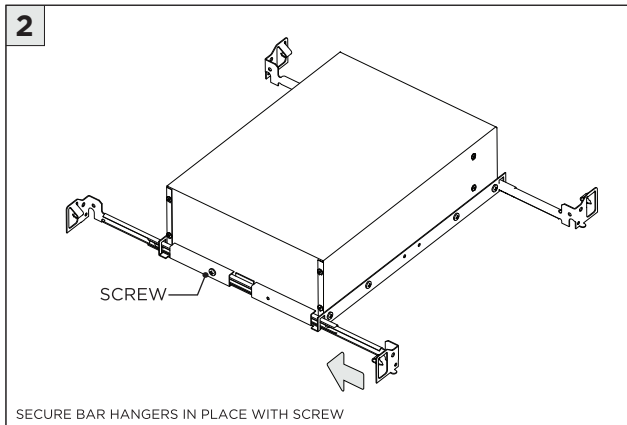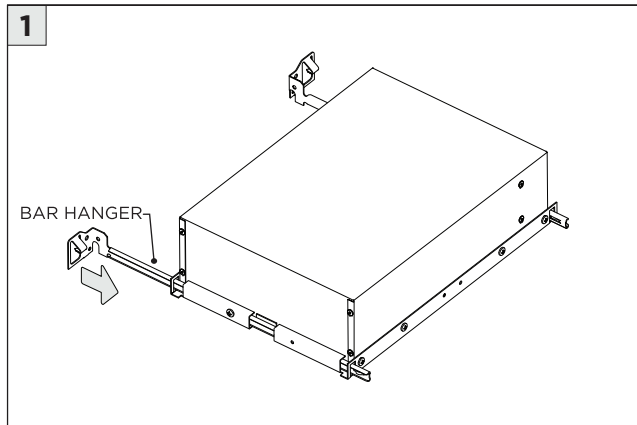


**8**

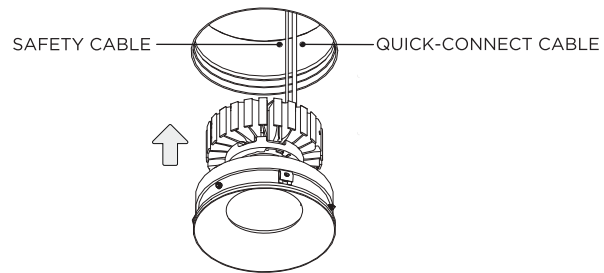

INSERT LED ASSEMBLY INTO CEILING


**8A**

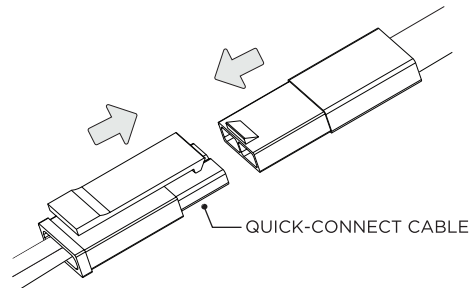


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

**NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)**


**1 BAR HANGER INSTALLATION**  
(IF SUPPLIED BY 3G)

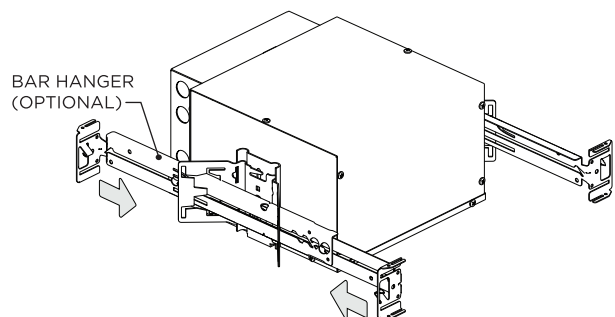


**1A**

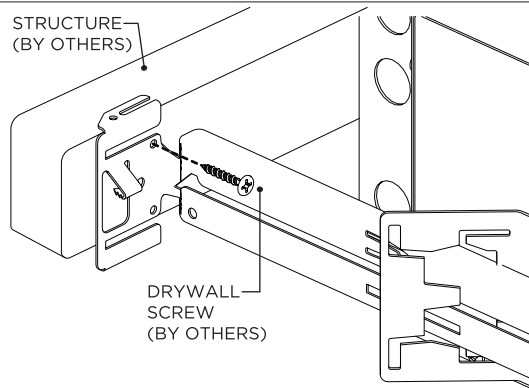

**2 OTHER BAR HANGER INSTALLATION**  
(NOT PROVIDED BY 3G)

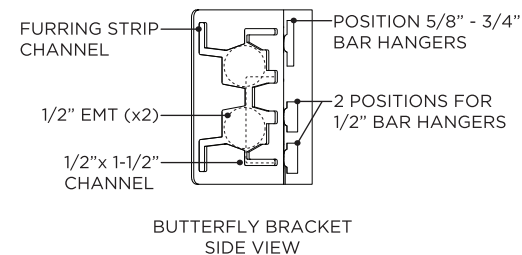


**3**

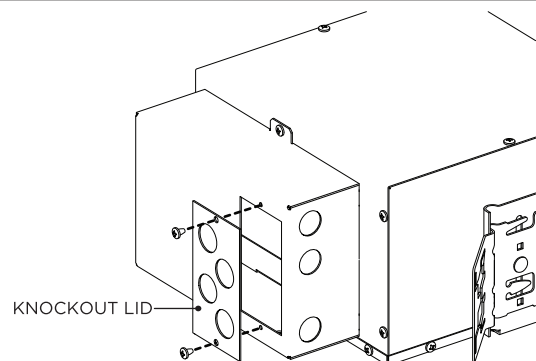

REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

**3A**

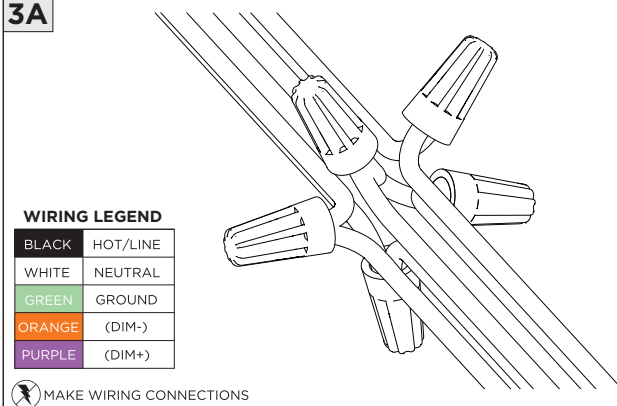


**4**



FIXTURE TYPE	CEILING HOLE SIZE
DL33RF	Ø 3.8125"
DL45RF	Ø 5.1250"


INSTALL CEILING BELOW FIXTURE

**5**

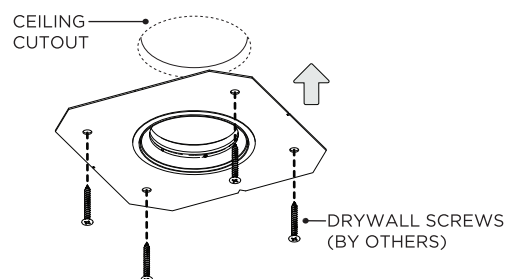


SECURE MUDDING FLANGE TO CEILING

**5A**

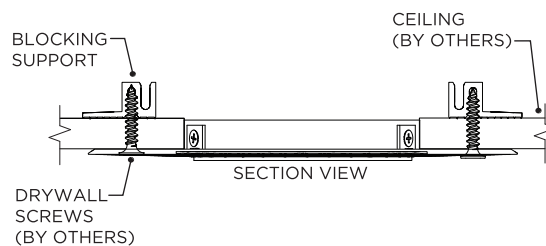


**6**

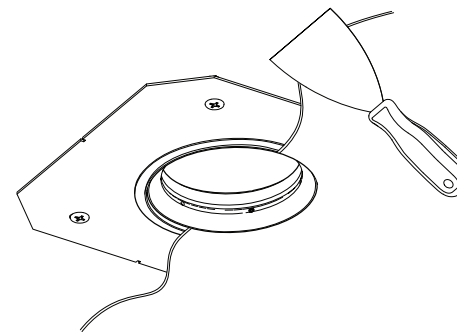

APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING




**7**

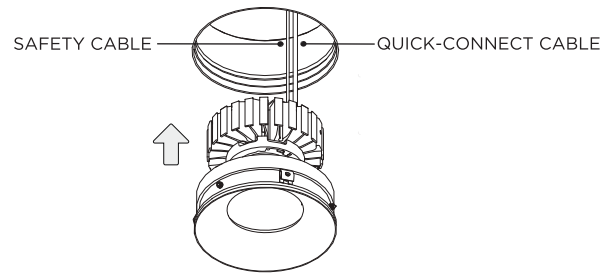

INSERT LED ASSEMBLY INTO CEILING


**7A**

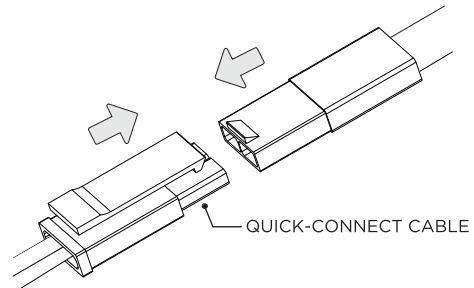

CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY


**LED SERVICING - DL33**

**1**




REMOVE LED ASSEMBLY FROM CEILING

**1A**

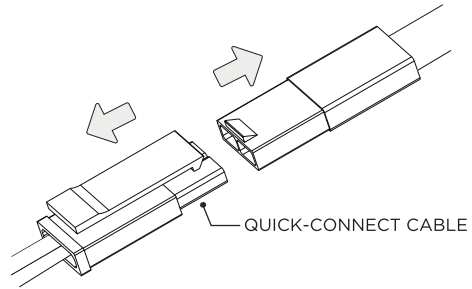


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**2**

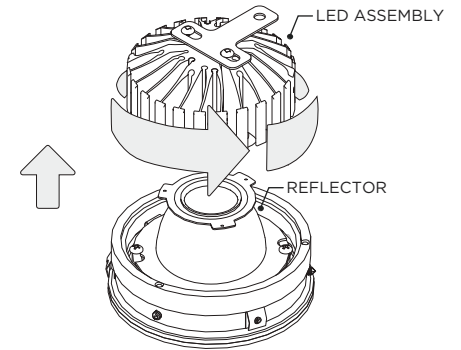


**LED SERVICING - DL45**

**1**

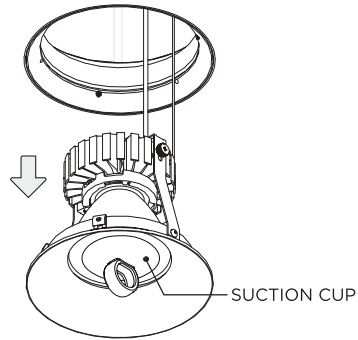

REMOVE LED ASSEMBLY FROM CEILING


**1A**

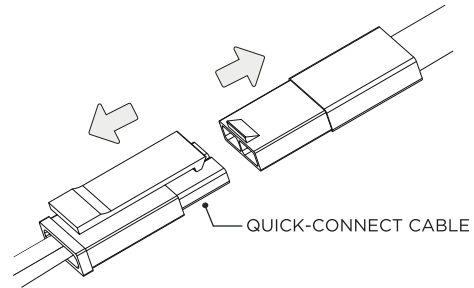


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**2**

**70mm HEATSINK**

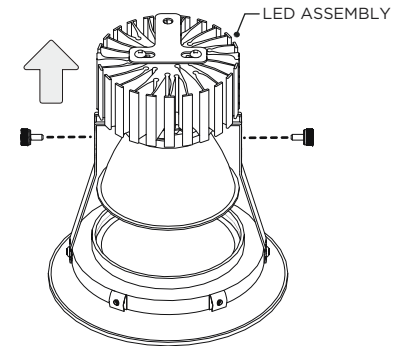


**3**

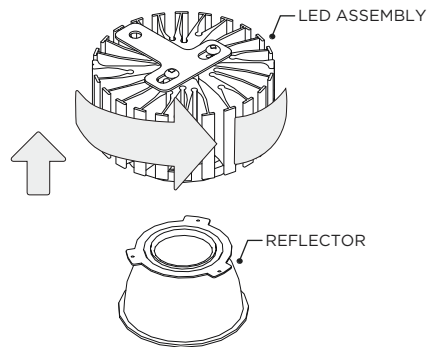


**1**

**99mm HEATSINK**

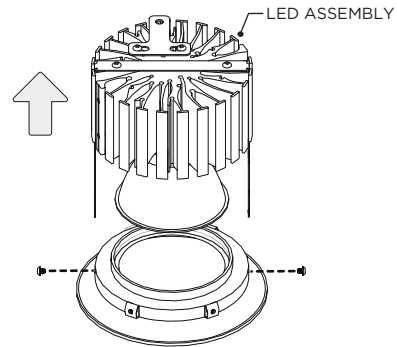


**2**

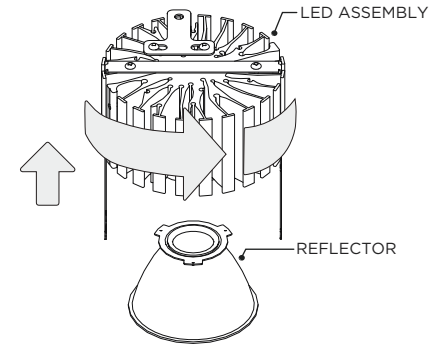


**DRIVER SERVICING - DL33**

**1 RMD - REMODEL**

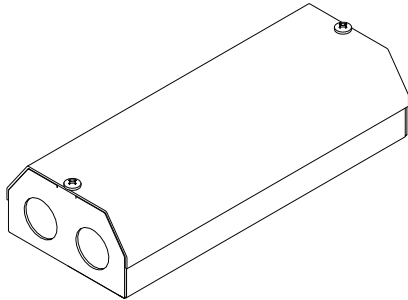


⚡ DISCONNECT POWER BEFORE SERVICING

**2**

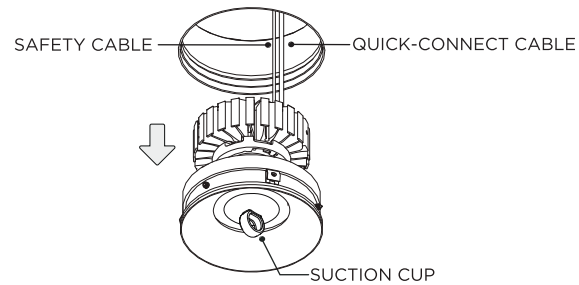


REMOVE LED ASSEMBLY FROM CEILING

**2A**

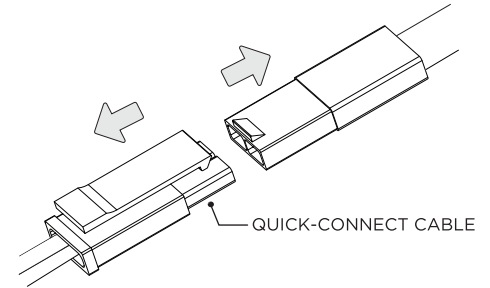


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**3**

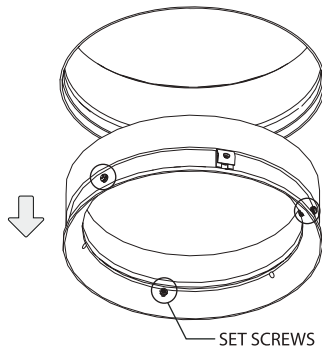


LOOSEN SET SCREWS AND REMOVE INSERT RING FROM CEILING

**4**




**5**

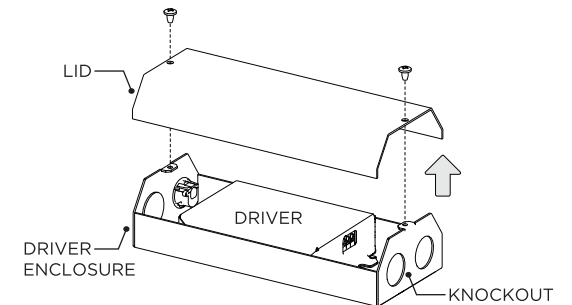


**DRIVER SERVICING - DL33**

**1 NCF - NEW CONSTRUCTION FRAME**

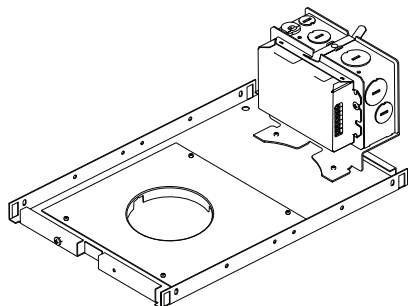


⚠️ DISCONNECT POWER BEFORE SERVICING

**2**

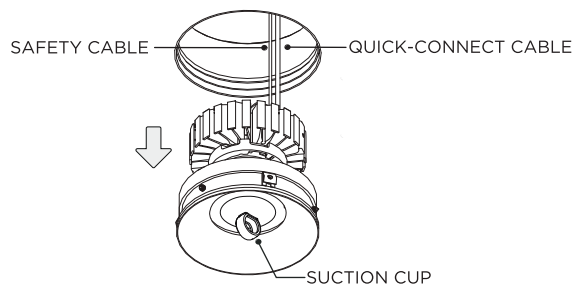


REMOVE LED ASSEMBLY FROM CEILING

**2A**

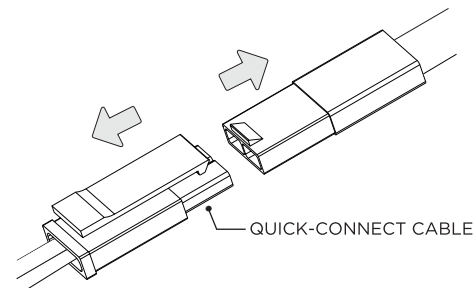


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**3**




LOOSEN SET SCREWS AND REMOVE INSERT RING FROM CEILING


**4**

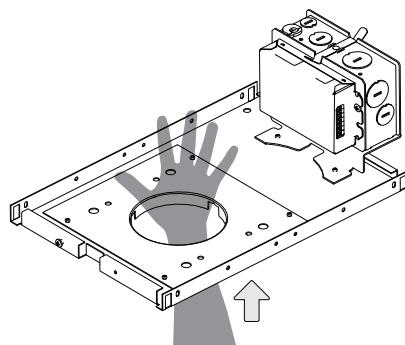


**5**

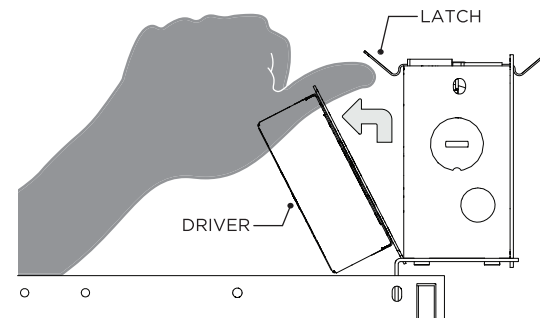

**6**

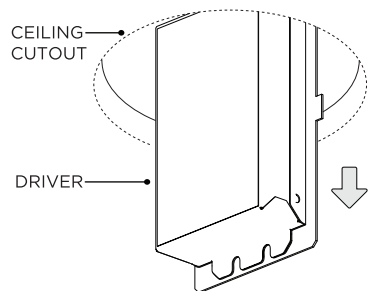


**6A**

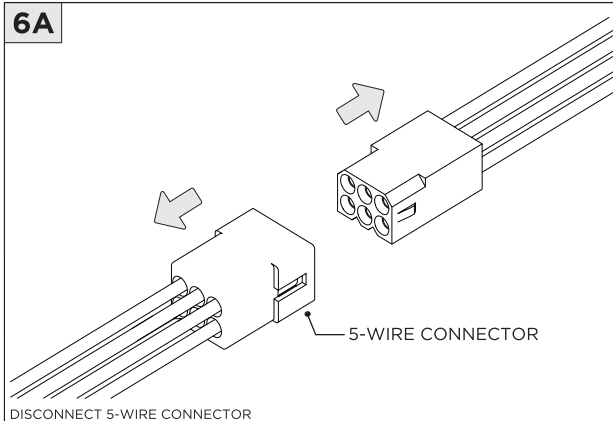


DISCONNECT 5-WIRE CONNECTOR

**7 NCF - NEW CONSTRUCTION FRAME  
FOR INTEGRATED BATTERY ONLY**

⚠️ THIS UNIT UTILIZES MORE THAN ONE  
POWER SOURCE  
⚠️ DISCONNECT ALL POWER SOURCES  
BEFORE SERVICING

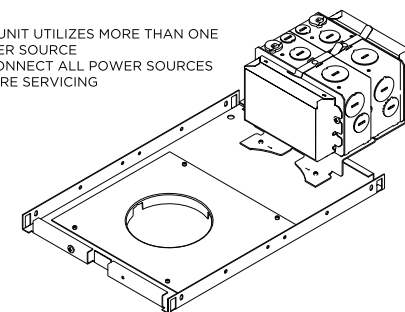


ℹ️ ACCESS ABOVE CEILING REQUIRED FOR DRIVER SERVICING

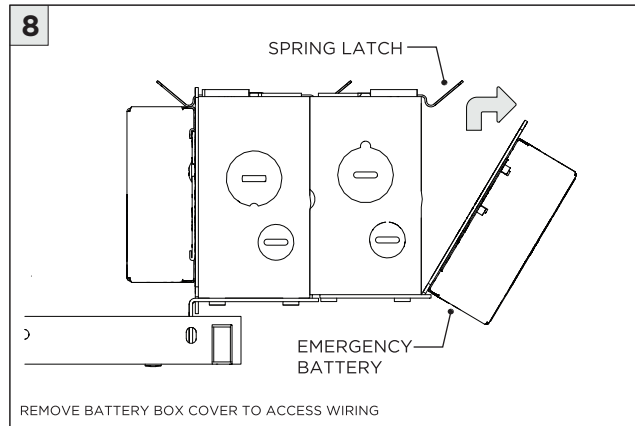


**DRIVER SERVICING - DL33**

**1 SH - SHALLOW HOUSING**

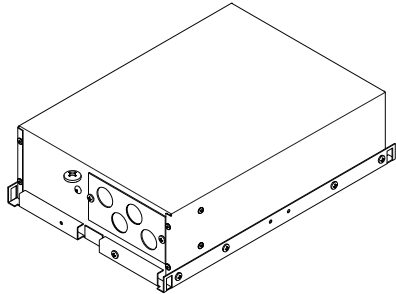


DISCONNECT POWER BEFORE SERVICING

**2**




REMOVE LED ASSEMBLY FROM CEILING

**2A**

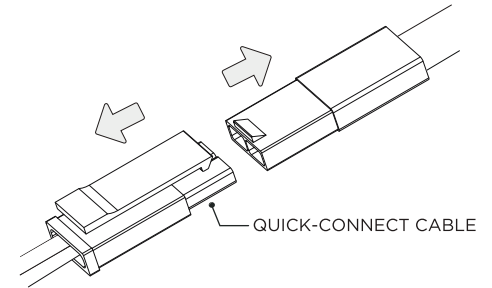


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**3**




LOOSEN SET SCREWS AND REMOVE INSERT RING FROM CEILING

**4**

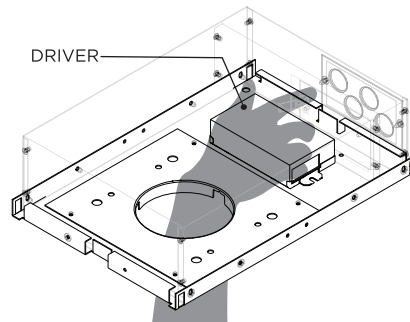


REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

**5**

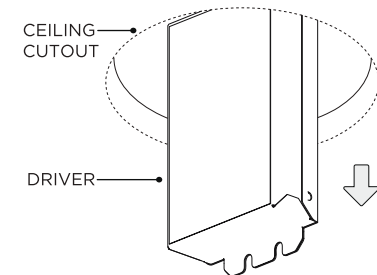


**6A**

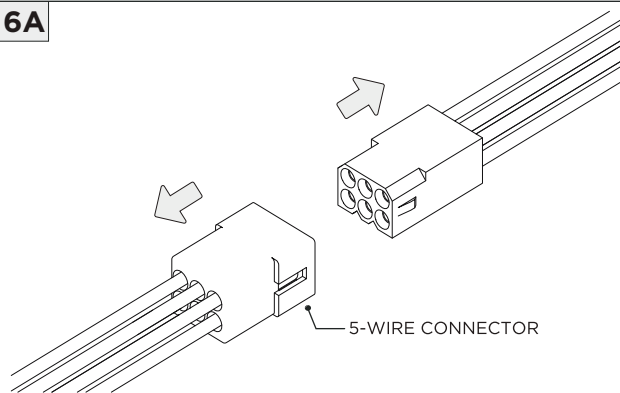

DISCONNECT 5-WIRE CONNECTOR


**DRIVER SERVICING - DL33**

**1 NC/IC - NEW CONSTRUCTION HOUSING**

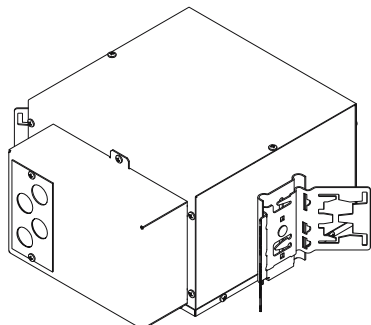


⚡ DISCONNECT POWER BEFORE SERVICING

**2**




REMOVE LED ASSEMBLY FROM CEILING

**2A**

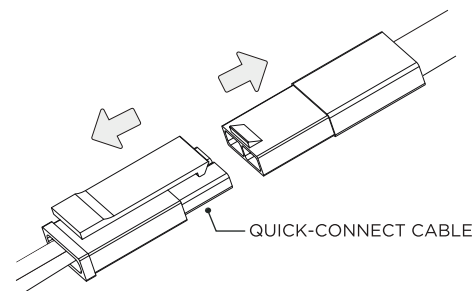

DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


**3**




LOOSEN SET SCREWS AND REMOVE INSERT RING FROM CEILING

**4**


THUMB SCREW

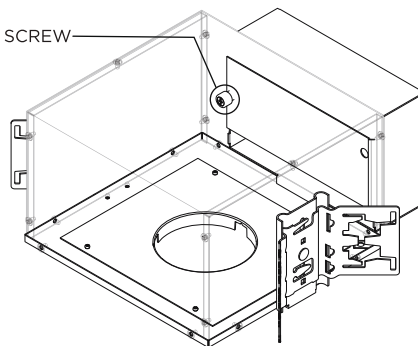


**5**

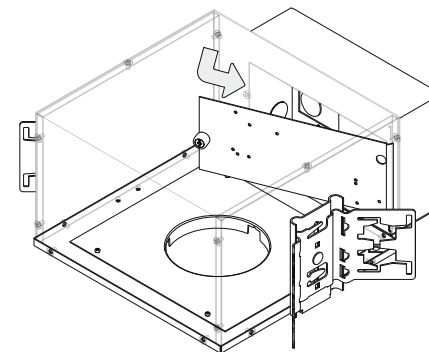

**6**

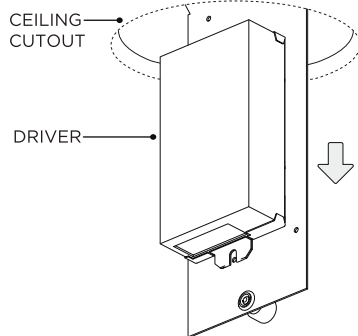

**6A**

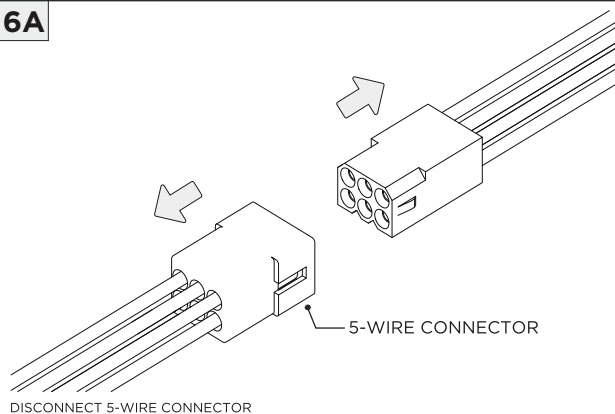


DISCONNECT 5-WIRE CONNECTOR




**DRIVER SERVICING - DL45**

**1 RMD - REMODEL**

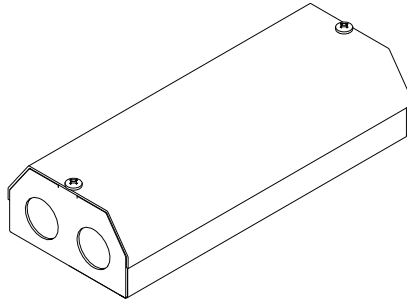


⚡ DISCONNECT POWER BEFORE SERVICING

**2**

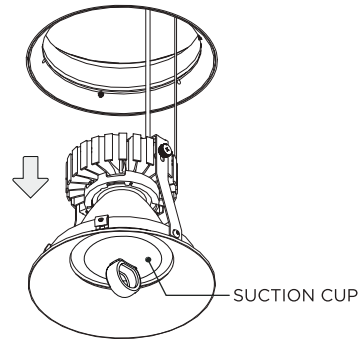


REMOVE LED ASSEMBLY FROM CEILING

**2A**

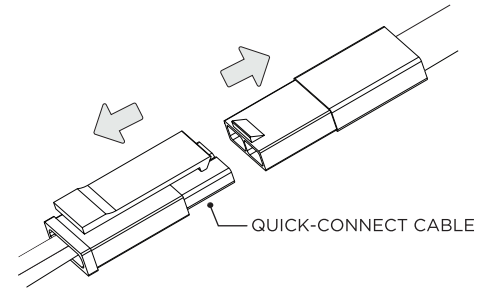


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**3**




**4**

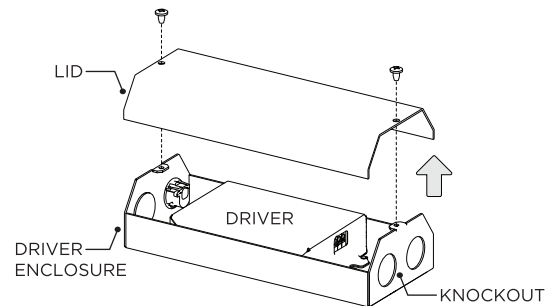


**DRIVER SERVICING - DL45**

**1 NCF - NEW CONSTRUCTION FRAME**

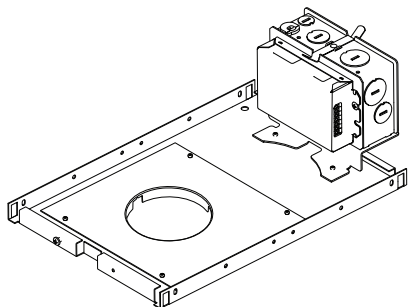


⚡ DISCONNECT POWER BEFORE SERVICING

**2**

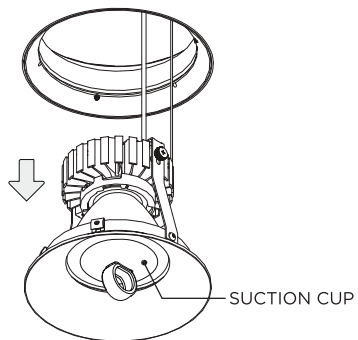


REMOVE LED ASSEMBLY FROM CEILING

**2A**

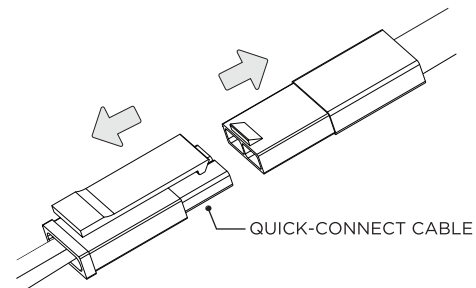


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


**3**

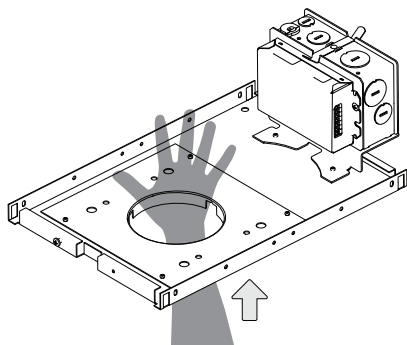


**4**

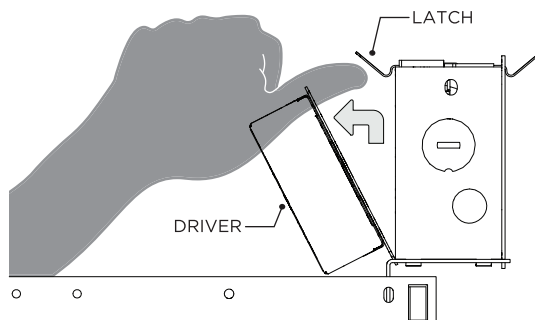

**5**

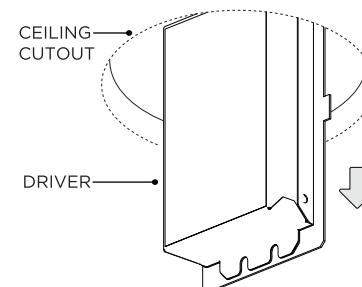


**5A**

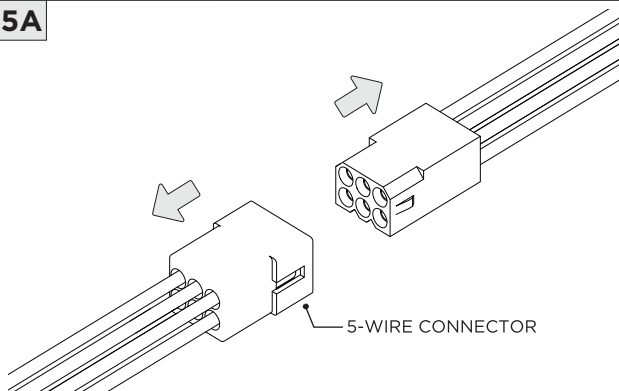

DISCONNECT 5-WIRE CONNECTOR


**6 NCF - NEW CONSTRUCTION FRAME  
FOR INTEGRATED BATTERY ONLY**

⚠ THIS UNIT UTILIZES MORE THAN ONE  
POWER SOURCE  
⚡ DISCONNECT ALL POWER SOURCES  
BEFORE SERVICING

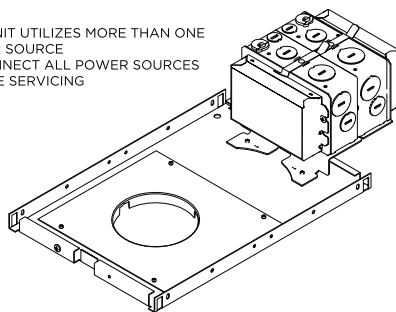

ℹ ACCESS ABOVE CEILING REQUIRED FOR DRIVER SERVICING


**7**

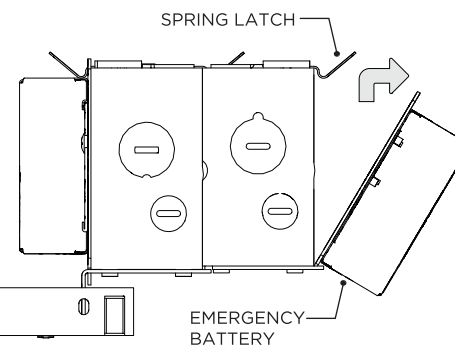

REMOVE BATTERY BOX COVER TO ACCESS WIRING


**DRIVER SERVICING - DL45**

**1 SH - SHALLOW HOUSING**

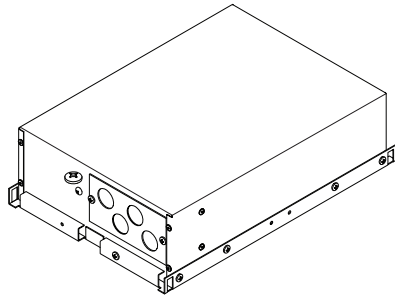


⚡ DISCONNECT POWER BEFORE SERVICING

**2**

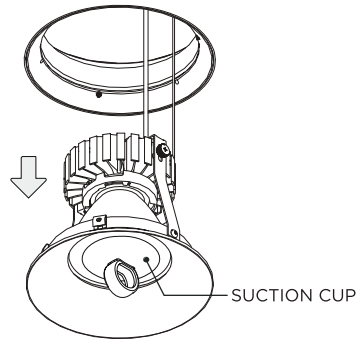


REMOVE LED ASSEMBLY FROM CEILING

**2A**

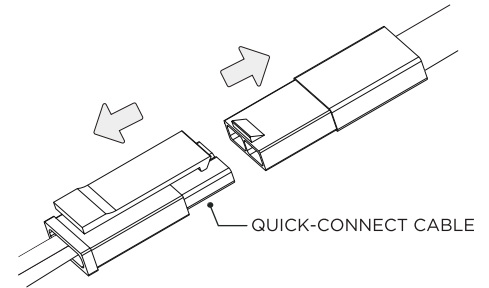


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**3**

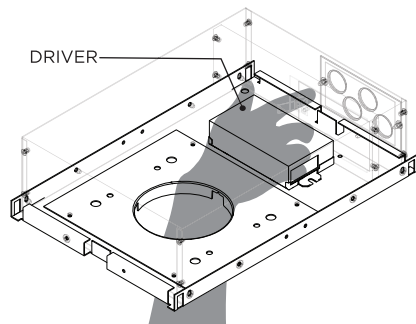


REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

**4**

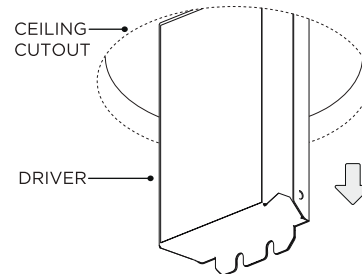


**4A**

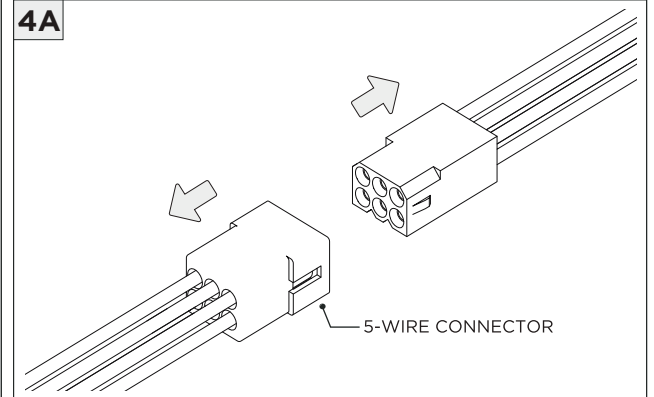

DISCONNECT 5-WIRE CONNECTOR


**DRIVER SERVICING - DL45**

**1 NC/IC - NEW CONSTRUCTION HOUSING**

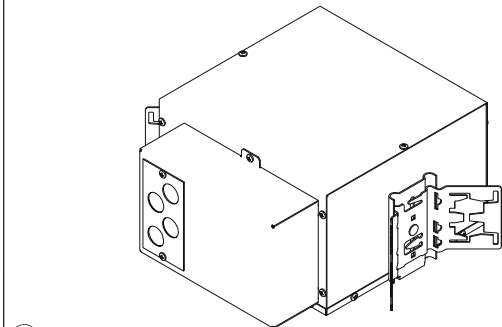


DISCONNECT POWER BEFORE SERVICING

**2**

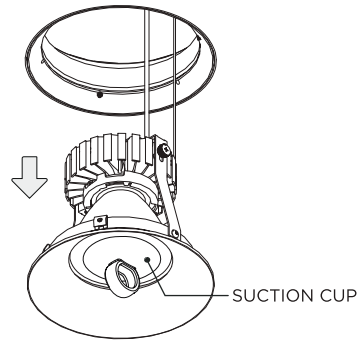


REMOVE LED ASSEMBLY FROM CEILING

**2A**

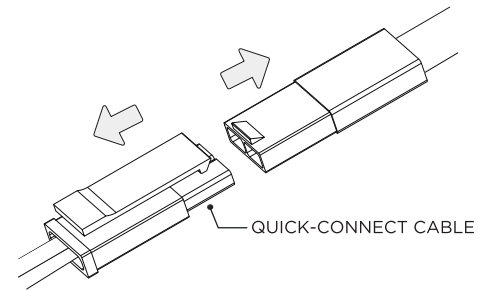


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


**3**

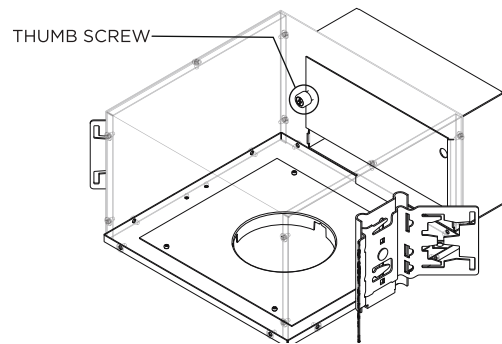


**4**

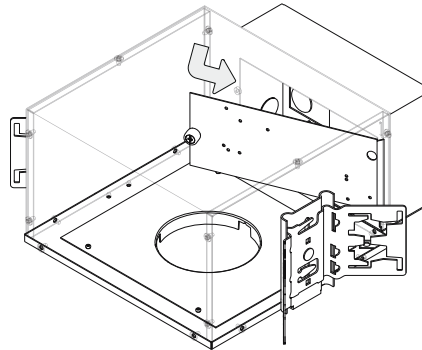

**5**

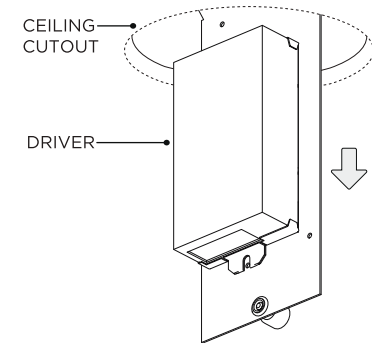

**5A**

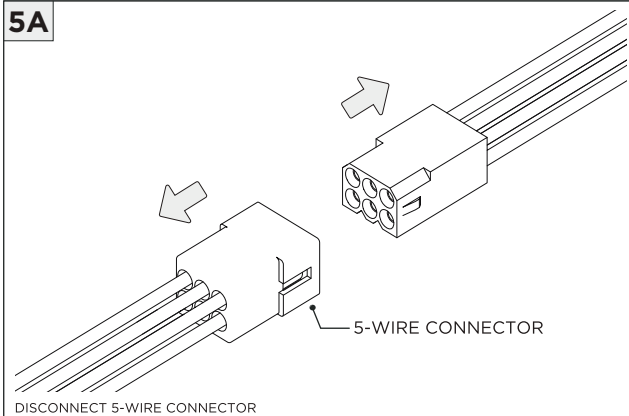

DISCONNECT 5-WIRE CONNECTOR