

3.3"/4.0" SQUARE ADJUSTABLE DOWNLIGHT FLANGELESS MILLWORK












ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
<p>NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)</p> <p>NEW CONSTRUCTION FRAME BAR HANGERS LED ASSEMBLY INSERT ASSEMBLY</p>	<p>SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)</p> <p>NEW CONSTRUCTION FRAME BAR HANGERS LED ASSEMBLY INSERT ASSEMBLY</p>
<p>NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)</p> <p>NEW CONSTRUCTION FRAME BAR HANGERS (OPTIONAL) LED ASSEMBLY INSERT ASSEMBLY</p>	


INSTRUCTION KEY	INFORMATION
⚠	ADDITIONAL
ⓘ	ATTENTION
⚡	POWER ON
🔌	POWER OFF
<p>INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING</p>	

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

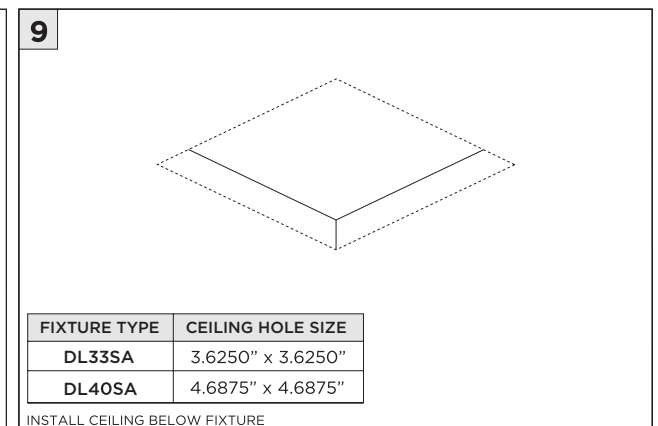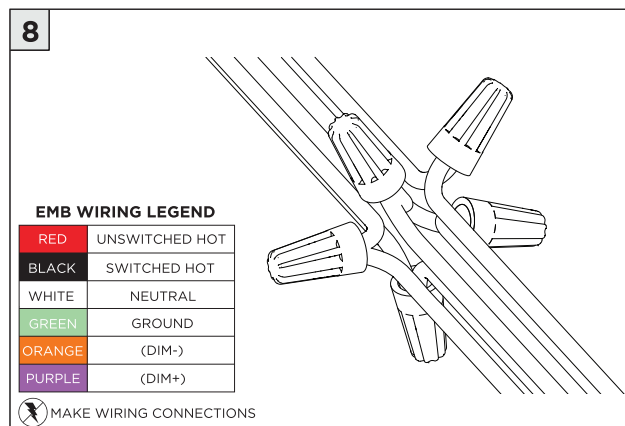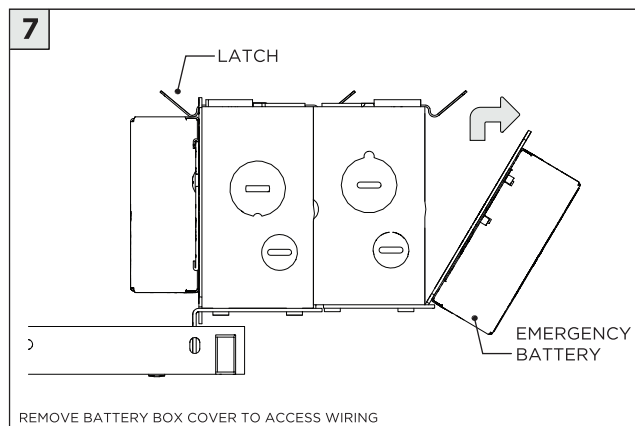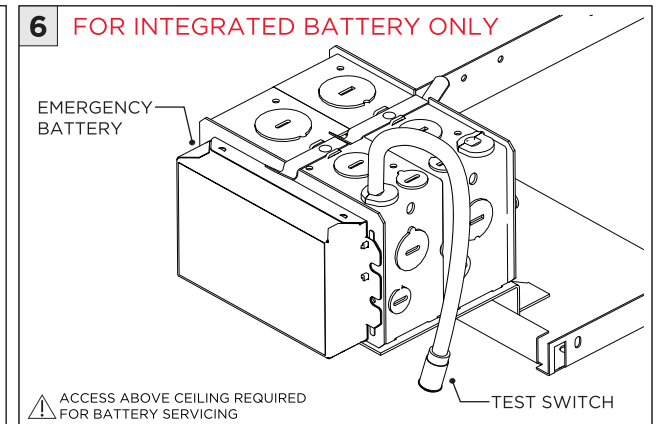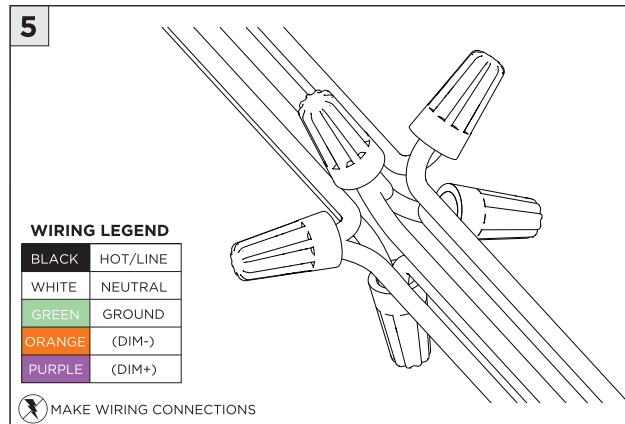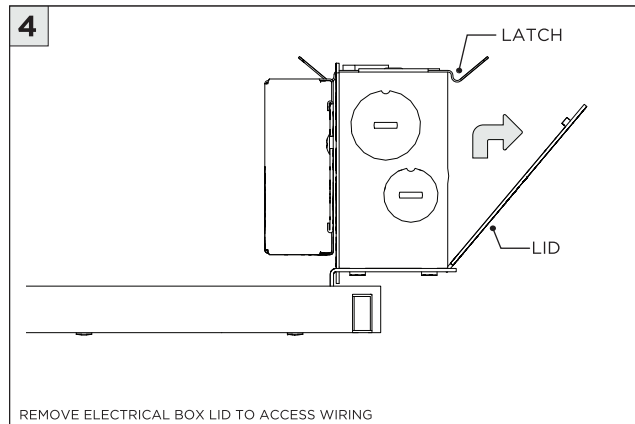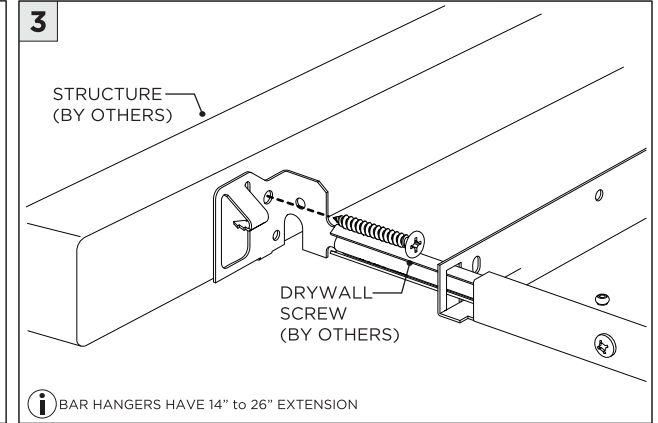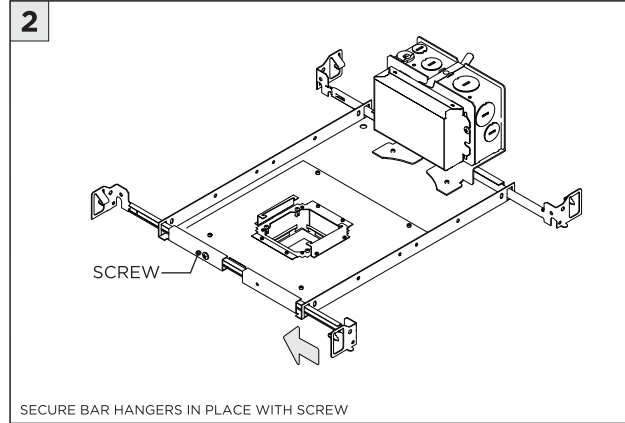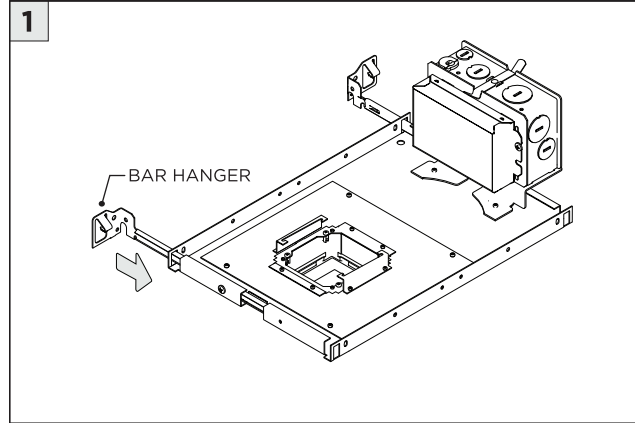


NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

10

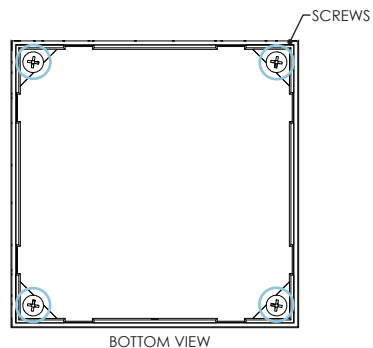


REMOVE 4 SCREWS FROM TRIM ASSEMBLY

11

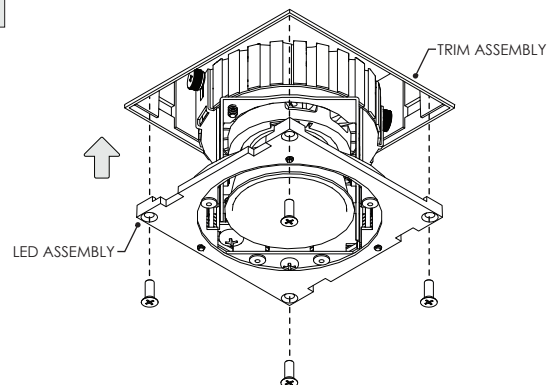


11A

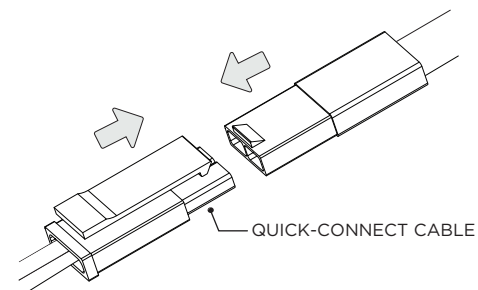


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

12

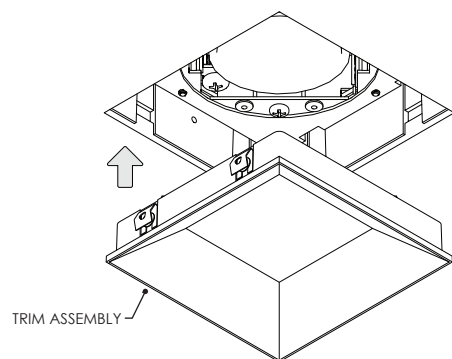


NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)


1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

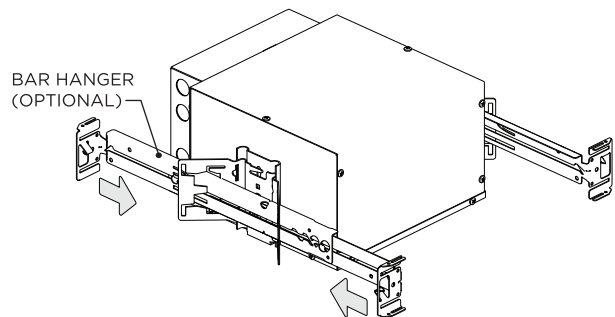


1A

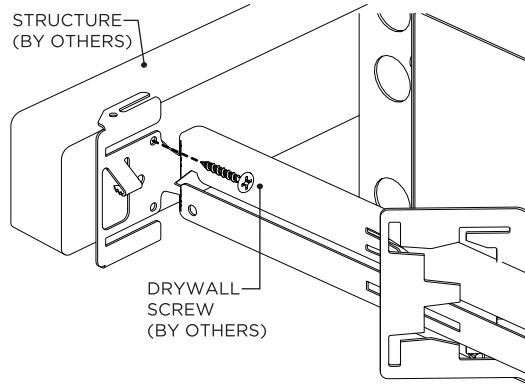

2 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

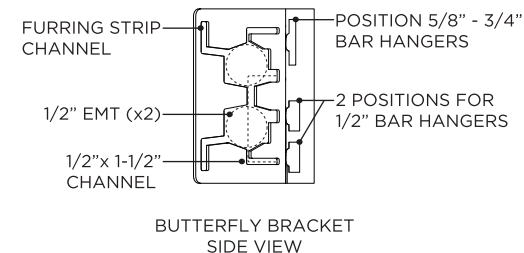

3

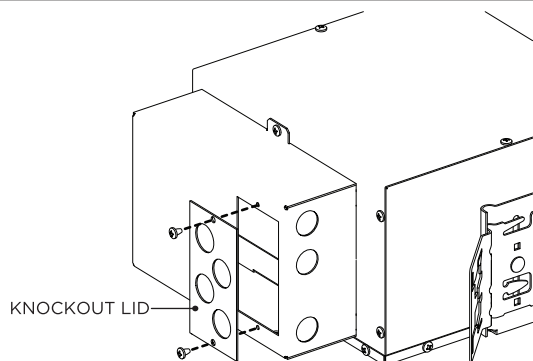


REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

4


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS

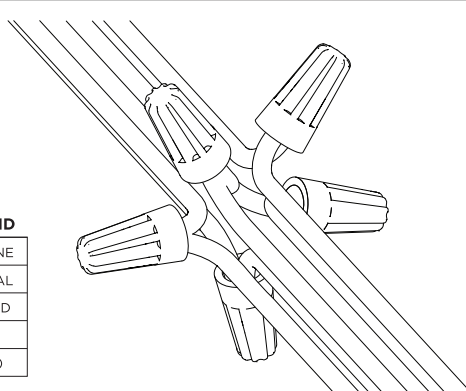


5

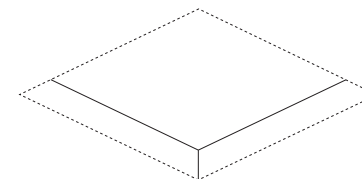

FIXTURE TYPE	CEILING HOLE SIZE
DL33SA	3.6250" x 3.6250"
DL40SA	4.6875" x 4.6875"


INSTALL CEILING BELOW FIXTURE

6

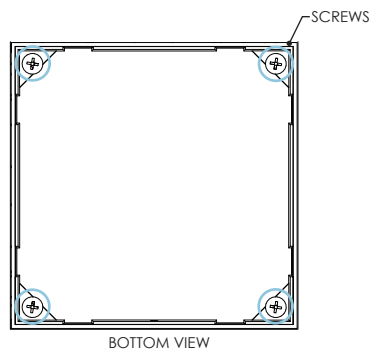


REMOVE 4 SCREWS FROM TRIM ASSEMBLY

7

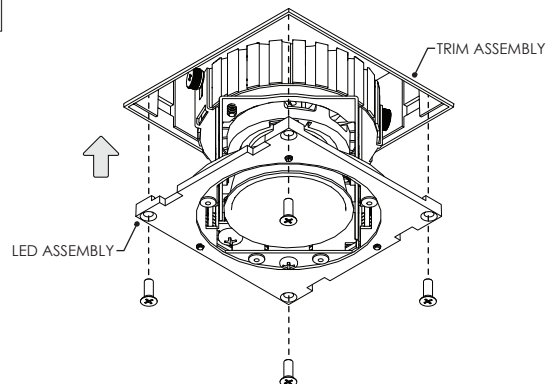


7A

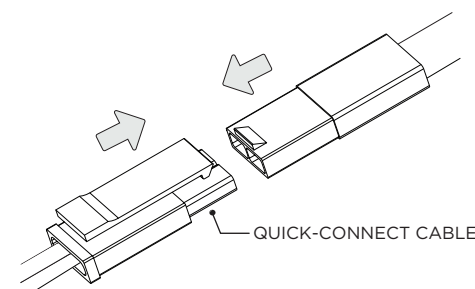

CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)

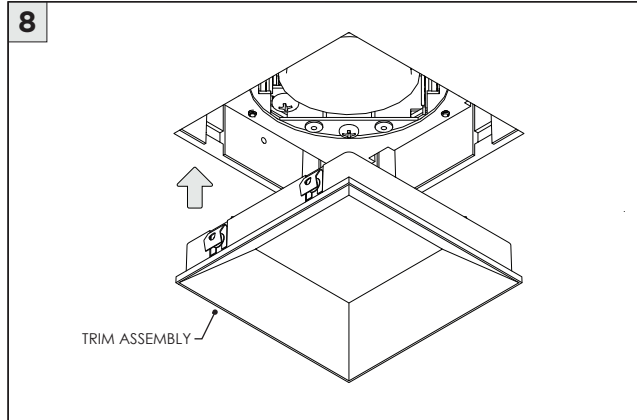

SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)

1

BAR HANGER

2

SCREW

SECURE BAR HANGERS IN PLACE WITH SCREW

3

STRUCTURE (BY OTHERS)

DRYWALL SCREW (BY OTHERS)

4

KNOCKOUT LID

REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

5

WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS

6

FIXTURE TYPE	CEILING HOLE SIZE
DL33SA	3.6250" x 3.6250"
DL40SA	4.6875" x 4.6875"

INSTALL CEILING BELOW FIXTURE

7

SCREWS

BOTTOM VIEW

REMOVE 4 SCREWS FROM TRIM ASSEMBLY

8

TRIM ASSEMBLY


LED ASSEMBLY

8A

QUICK-CONNECT CABLE


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)

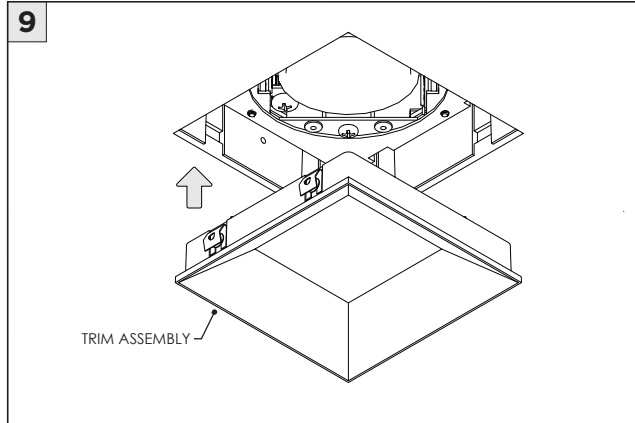


LED ADJUSTMENT

1

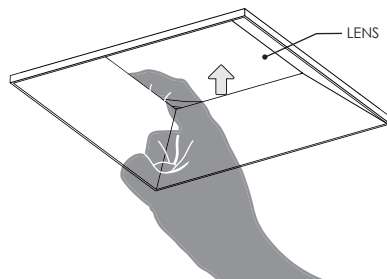

LIFT LENS AND DETATCH INSERT FROM ADAPTER RING


1A

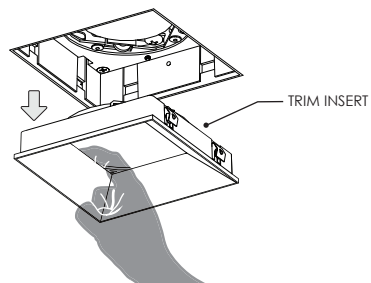

TRIM INSERT

2


ANGLE ADJUSTMENT

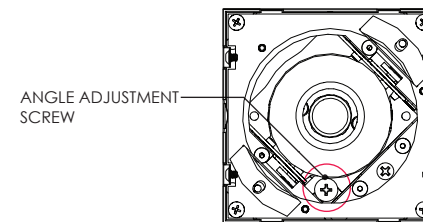

BOTTOM VIEW


TURN SCREW TO ADJUST LED ANGLE

2A

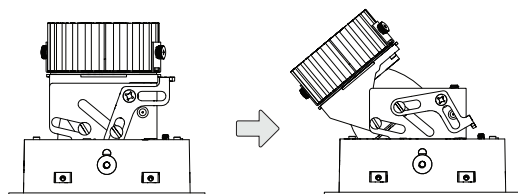

3

ROTATION ADJUSTMENT




ROTATION ADJUSTMENT
SCREW

BOTTOM VIEW

LOOSEN SCREW TO UNLOCK LED ASSEMBLY ROTATION


LED SERVICING

1

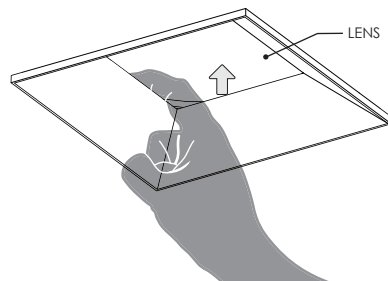


LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

1A

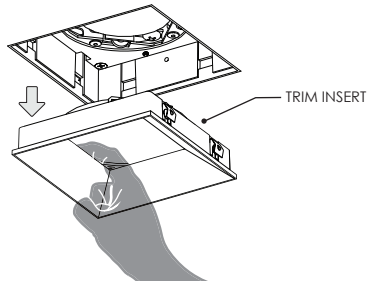


2




REMOVE 4 SCREWS TO DETATCH LED ASSEMBLY FROM CEILING

2A

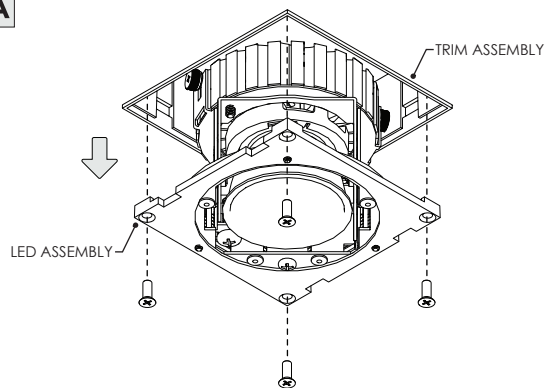


3

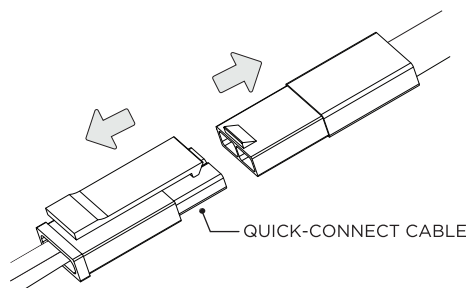


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

4

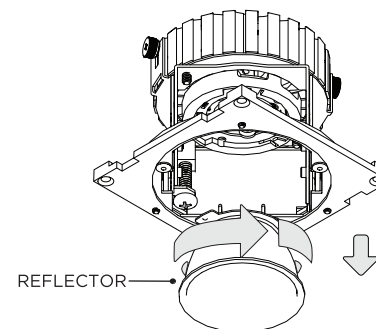


TWIST REFLECTOR TO REMOVE

5

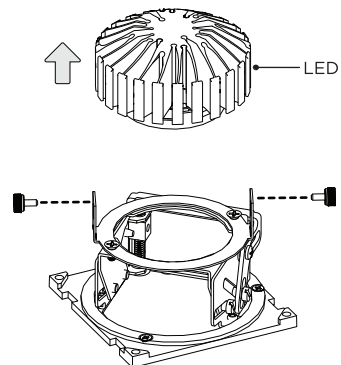


DRIVER SERVICING

1 NCF - NEW CONSTRUCTION FRAME

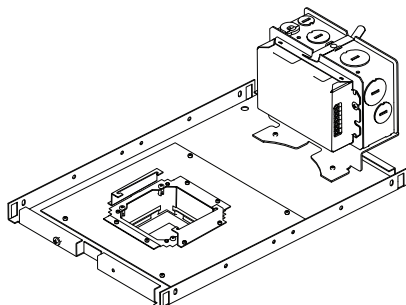


DISCONNECT POWER BEFORE SERVICING

2

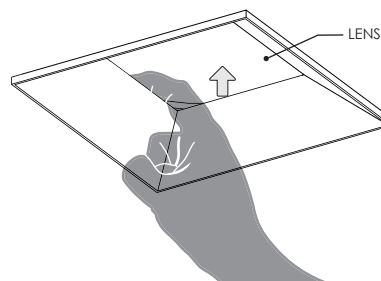


LIFT LENS AND DETACH INSERT FROM ADAPTER RING

2A

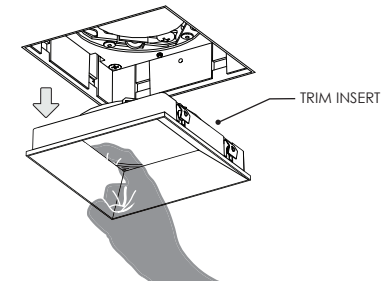


3




REMOVE 4 SCREWS TO DETACH LED ASSEMBLY FROM CEILING

4

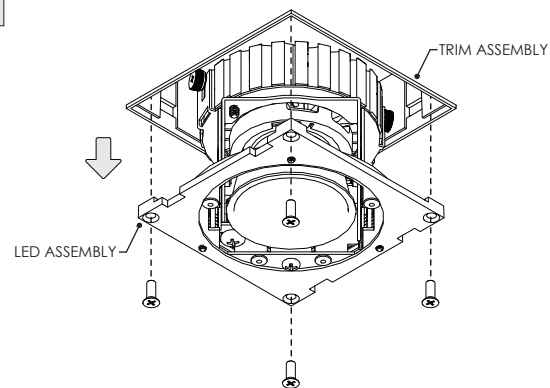


5

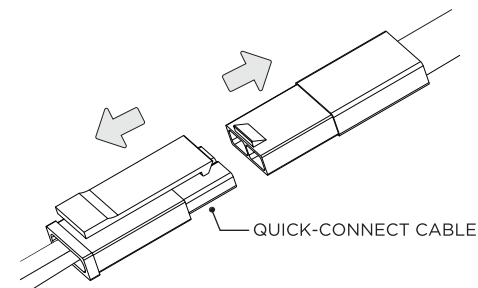


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


6

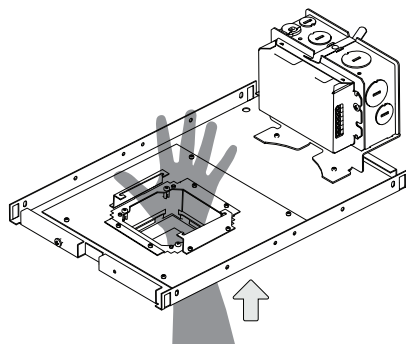


7


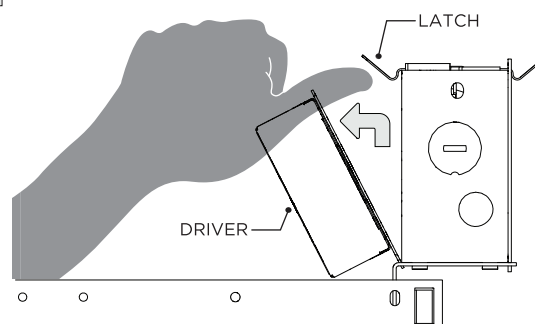


8

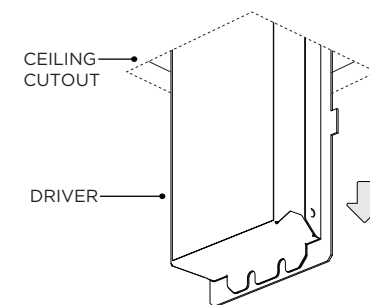

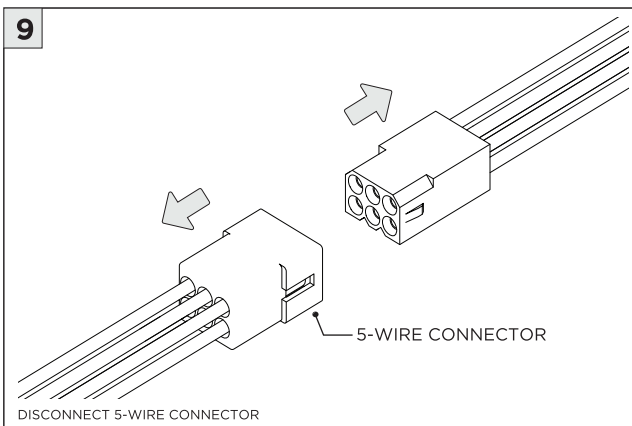


10 NCF - NEW CONSTRUCTION FRAME
FOR INTEGRATED BATTERY ONLY

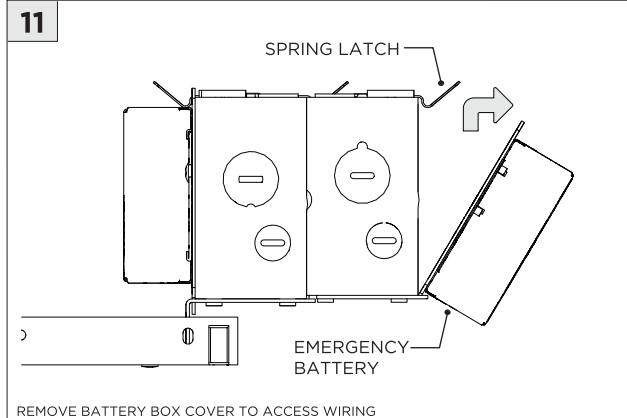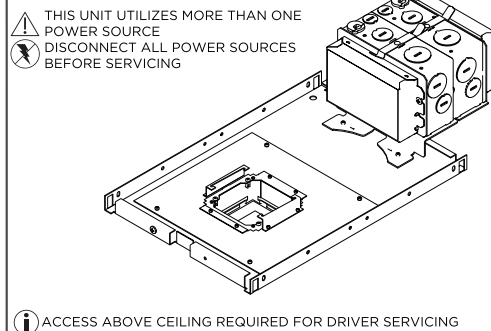


DRIVER SERVICING

1 SH - SHALLOW HOUSING

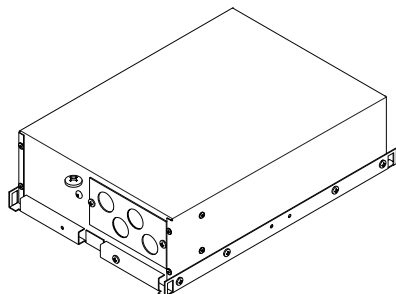


⚡ DISCONNECT POWER BEFORE SERVICING

2

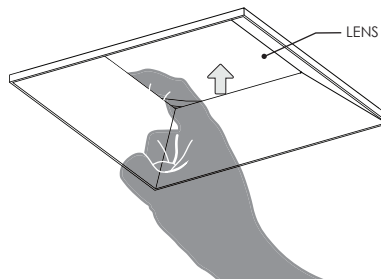


LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

2A

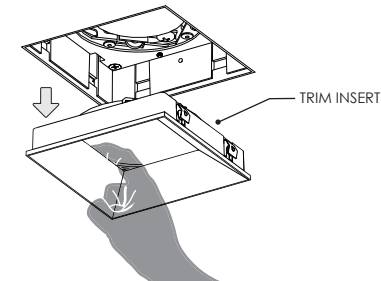


3




REMOVE 4 SCREWS TO DETATCH LED ASSEMBLY FROM CEILING

4

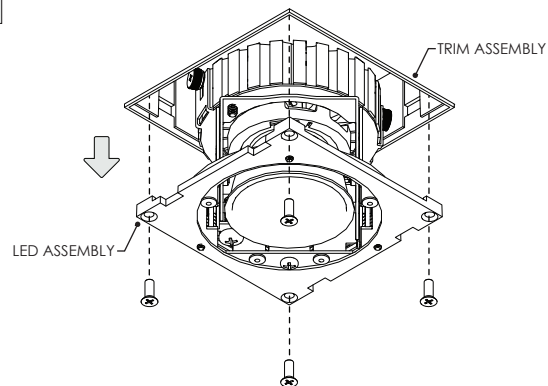


5

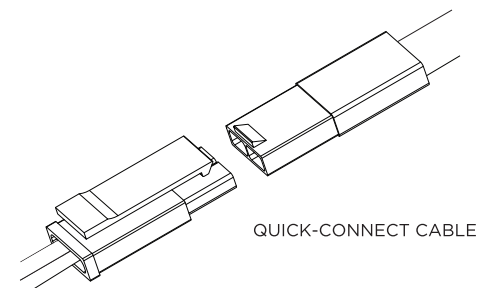


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

6

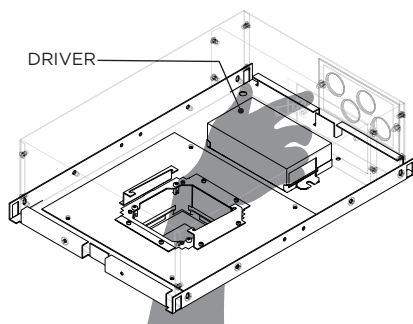


REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

7

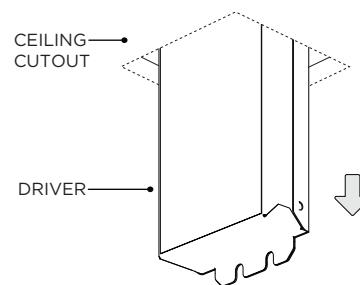


8

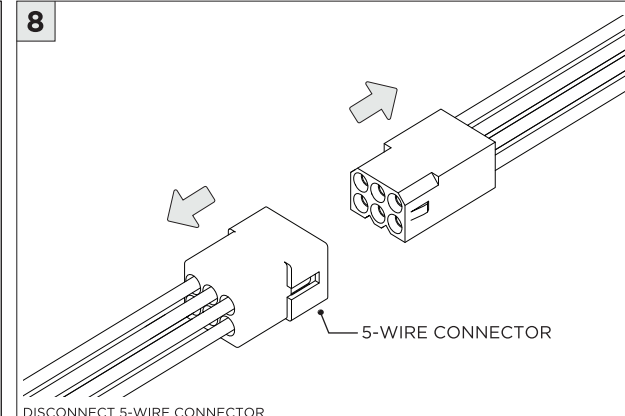

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING

1 NC/IC - NEW CONSTRUCTION HOUSING

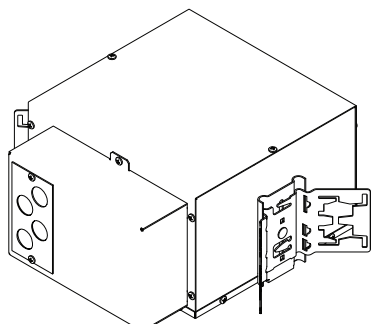


DISCONNECT POWER BEFORE SERVICING

2

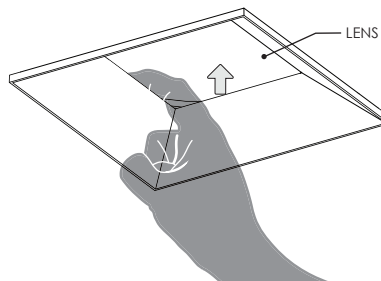


LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

2A

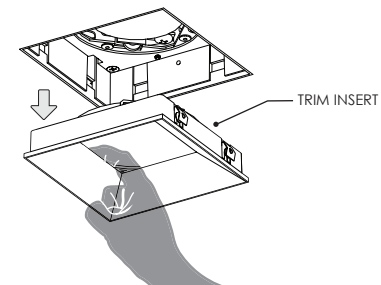


3




REMOVE 4 SCREWS TO DETATCH LED ASSEMBLY FROM CEILING

4

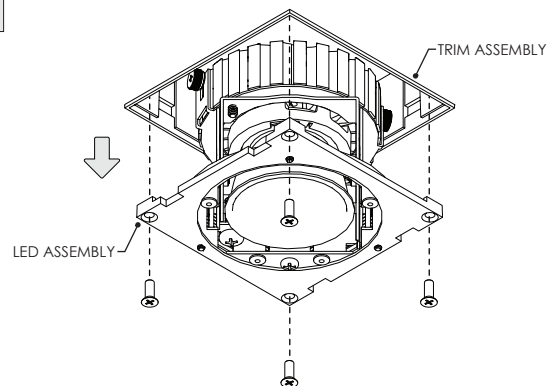


5

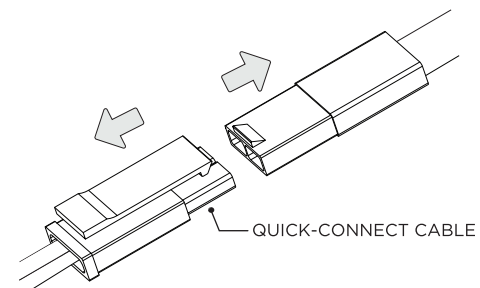


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

6

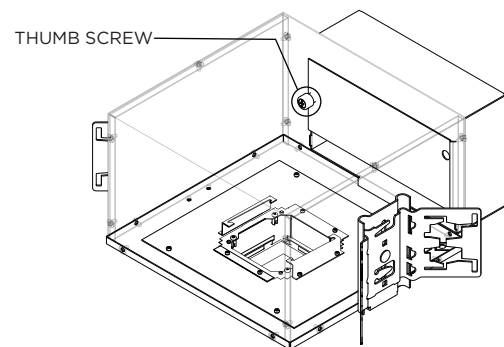

7

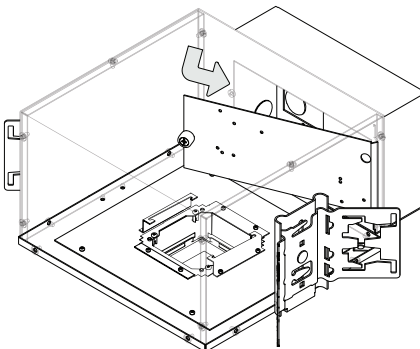

8

