

SURFACE KUBO MULTIPLE SQUARE

3G-SKU822
8" SURFACE

3G
LIGHTING



Pendant Kubo Multiple



Surface Kubo Single



24" Surface Kubo



Surface Linear Kubo

FEATURES

CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar fabricated in steel with powder coated finish
- Modified configurations available upon request

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range.
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of 60,000 hours
- Color consistency < 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at 60,000 hours

MOUNTING

- Suitable for surface mounted installations
- Fixture mounts to a standard junction box

FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY



- 5 Year limited warranty.

PROJECT

TYPE

DATE

CATALOG #

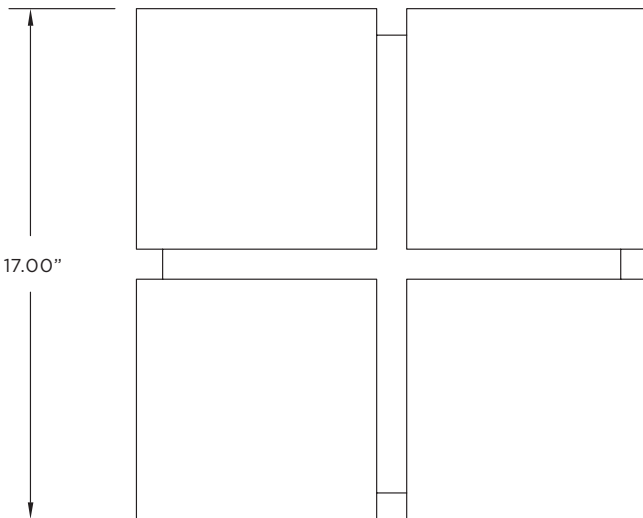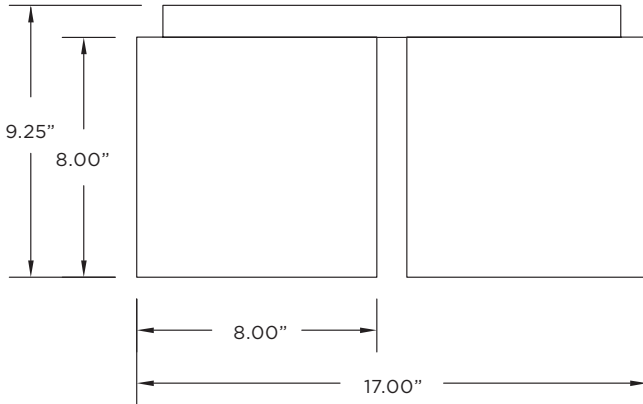

ORDERING INFORMATION

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH
3G-SKU822	L2 - STANDARD OUTPUT L4 - HIGH OUTPUT	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD 100-1%) DHL - LUTRON (3-WIRE-100-1%) DHL2 - LUTRON (ECOSYSTEM-100-1%) DALI - DALI (100-1%)	WH - WHITE (STANDARD) SV - SILVER
		30K - 3000K	277 - 277V		
		35K - 3500K	347 - 347V (0-10V ONLY)		
		40K - 4000K			

3G-SKU822					
------------------	--	--	--	--	--

ORDERING EXAMPLE **3G-SKU822-L2-35K-120-DIM-WH**

Copyright 2016 3G Lighting
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
 3G reserves the right to change, without notice, specifications or materials for product improvement.



SURFACE KUBO MULTIPLE SQUARE


3G-SKU822
8" SURFACE



PERFORMANCE CHART (based on 3500K)

LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
STANDARD OUTPUT	45W	4599	103	DOWNLOAD
HIGH OUTPUT	60W	6182	103	DOWNLOAD

MOUNTING

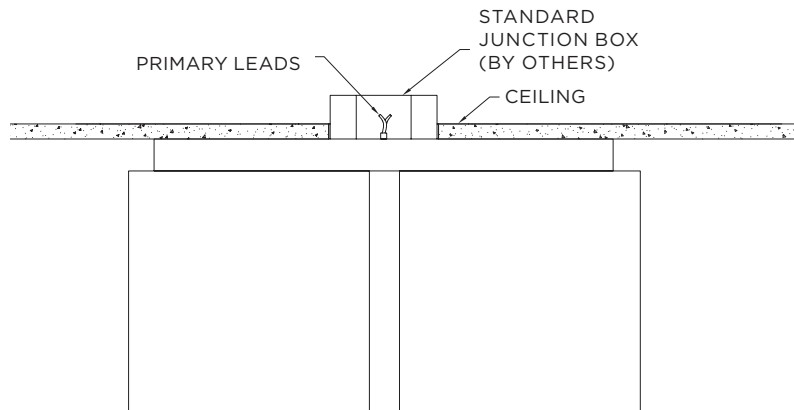

NOTES

Blank area for notes.