
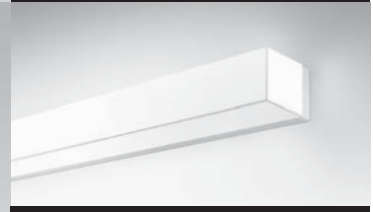


PENDANT LINEAR KUBO

3G-PLKU4 4" PENDANT

3G
LIGHTING

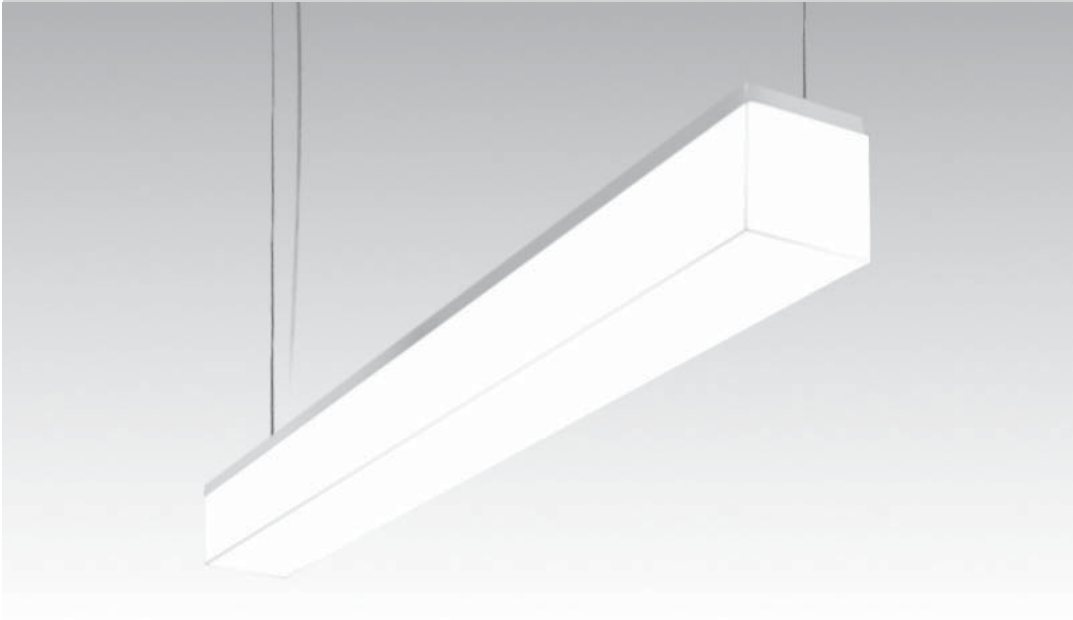

Surface Linear Kubo



Recessed Linear Kubo



Pendant Kubo



Surface Kubo

FEATURES

CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar and mounting canopy fabricated in steel with powder coated finish
- Modified configurations available upon request

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eLdoLED Dali driver available with 100-1% dimming range

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of >50,000 hours
- Color consistency 3 SDCM
- CRI>80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at >50,000 hours

MOUNTING

- Suitable for various ceiling applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners

FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY

- 5 Year limited warranty

PENDANT - LINEAR KUBO | 3G - PLKU4 | 4" PENDANT




PROJECT

TYPE

DATE

CATALOG #

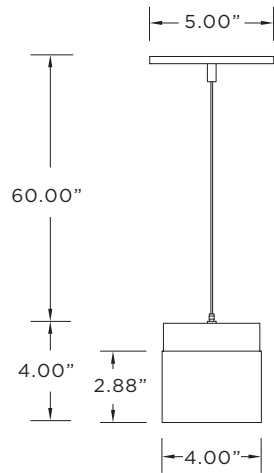

ORDERING INFORMATION

CAT. NO	LENGTH	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH	CABLE LENGTH
3G-PLKU4	24 - 24"	L2 - STANDARD OUTPUT	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD - 100-1%)	WH - WHITE (STANDARD)	60 - 60" (STANDARD) 120 - 120"
	36 - 36"		30K - 3000K	277 - 277V			
	48 - 48"	L4 - HIGH OUTPUT	35K - 3500K		DHL - LUTRON (3-WIRE - 100-1%)	SV - SILVER	
	60 - 60"		40K - 4000K				
	96 - 94"						
					DALI - DALI (100-1%)		
3G-PLKU4							

ORDERING EXAMPLE

3G-PLKU4-24-L2-30K-120-DIM-WH-60

Copyright 2016 3G Lighting.
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
 3G reserves the right to change, without notice, specifications or materials for product improvement.



5 YEAR LIMITED WARRANTY



MADE IN NORTH AMERICA
 ARRA COMPLIANT



PENDANT LINEAR KUBO

3G-PLKU4
4" PENDANT




PERFORMANCE CHART (based on 3500K)


LENGTH	LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
24"	L2 - STANDARD OUTPUT	11W	855	78	DOWNLOAD
	L4 - HIGH OUTPUT	19W	1466	77	DOWNLOAD
36"	L2 - STANDARD OUTPUT	16W	1280	80	DOWNLOAD
	L4 - HIGH OUTPUT	28W	2184	78	DOWNLOAD
48"	L2 - STANDARD OUTPUT	22W	1748	79	DOWNLOAD
	L4 - HIGH OUTPUT	37W	2982	81	DOWNLOAD
60"	L2 - STANDARD OUTPUT	27W	2215	82	DOWNLOAD
	L4 - HIGH OUTPUT	46W	3779	82	DOWNLOAD
94"	L2 - STANDARD OUTPUT	43W	3512	82	DOWNLOAD
	L4 - HIGH OUTPUT	73W	5990	82	DOWNLOAD

MOUNTING


GRID POWER FEED




GRID NON POWER FEED



DRYWALL POWER FEED



DRYWALL NON POWER FEED



NOTES