



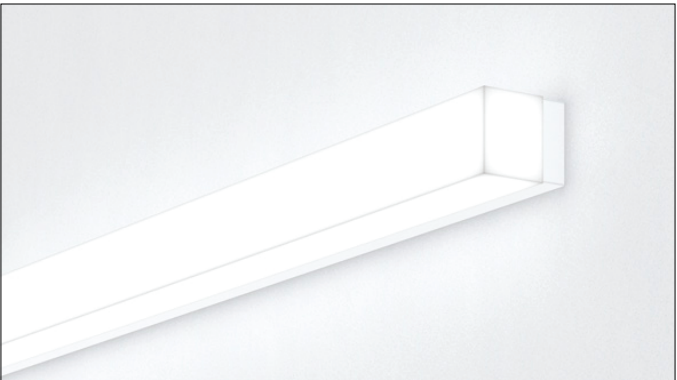

3G-SLKU4/SLKU6
4" LINEAR SURFACE KUBO
6" LINEAR SURFACE KUBO

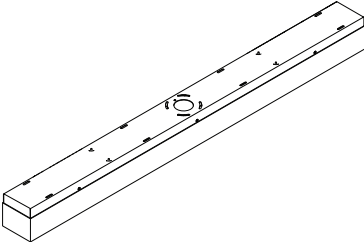


THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
 KUBO	


INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
 ATTENTION	
 POWER ON	
 POWER OFF	

1

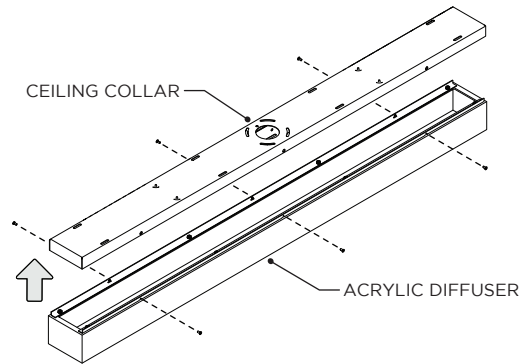


REMOVE CEILING COLLAR FROM ACRYLIC DIFFUSER

2

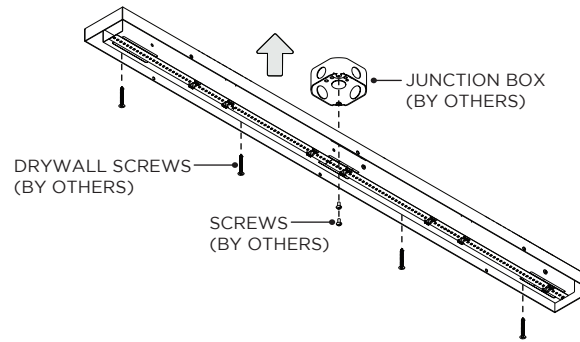

i SECURE CEILING PLATE WITH DRYWALL SCREWS (BY OTHERS) FOR ADDITIONAL SUPPORT

2A




BOTTOM VIEW

2B


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

i MAKE WIRING CONNECTIONS INSIDE JUNCTION BOX

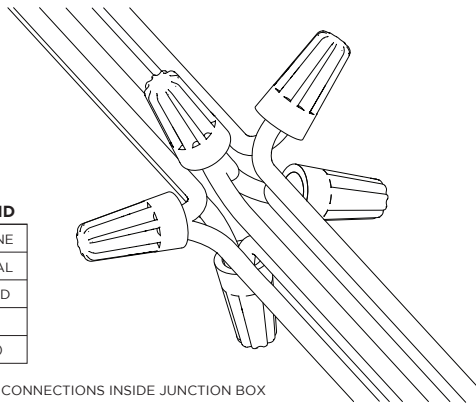


3

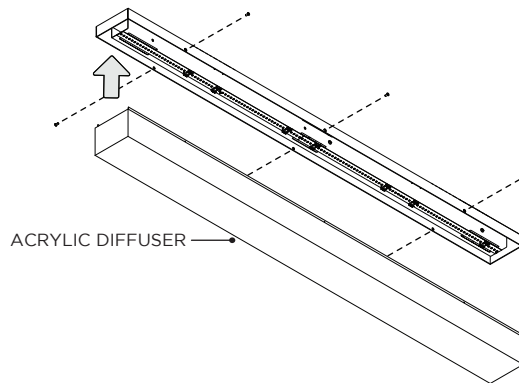

SECURE ACRYLIC DIFFUSER ONTO CEILING COLLAR


DRIVER SERVICING

1

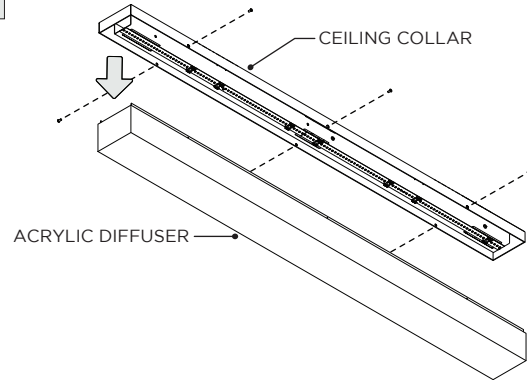


REMOVE ACRYLIC DIFFUSER FROM CEILING COLLAR

2

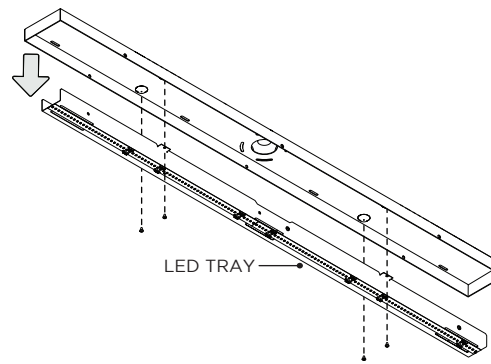


REMOVE LED TRAY FROM CEILING COLLAR

3

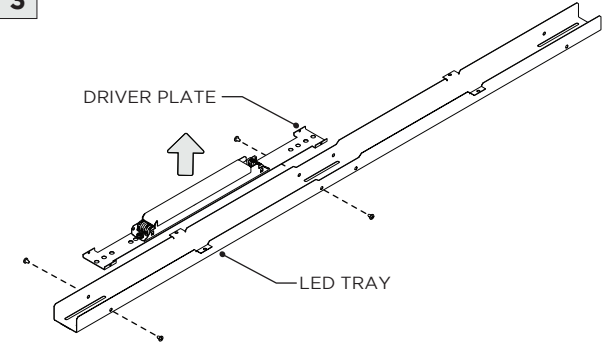


3A

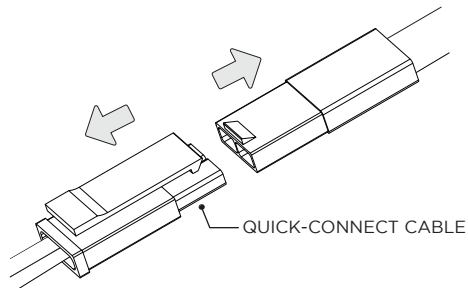

DISCONNECT QUICK-CONNECT CABLE FROM LED


4

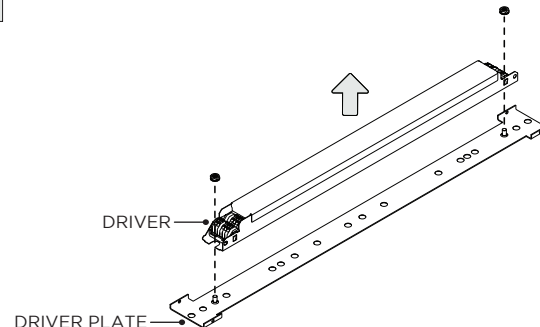

SERVICE DRIVER AND REASSEMBLE FIXTURE


LED SERVICING

1

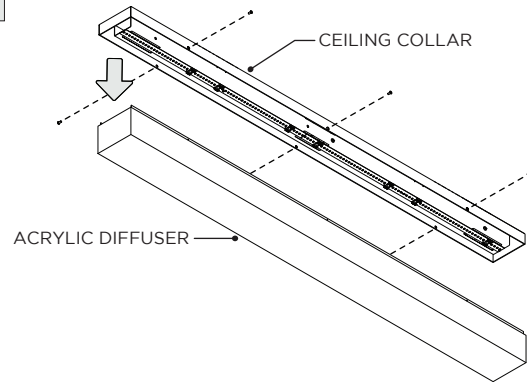


REMOVE ACRYLIC DIFFUSER FROM CEILING COLLAR

2

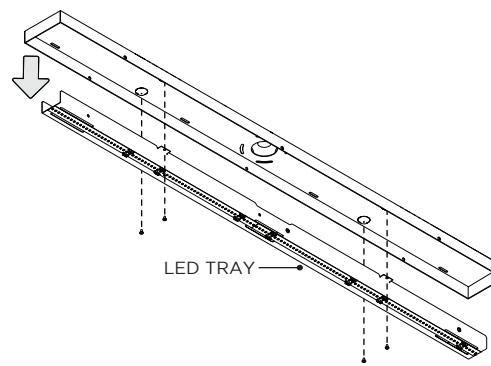


REMOVE LED TRAY FROM CEILING COLLAR

3

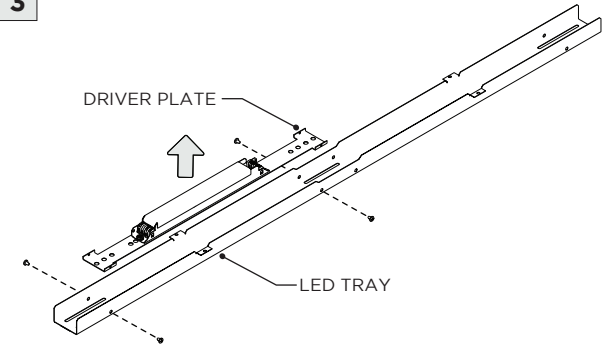

3A

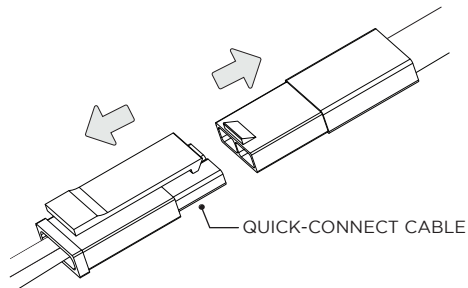

DISCONNECT QUICK-CONNECT CABLE FROM LED
REPLACE LED TRAY & REASSEMBLE FIXTURE