



# 3GQ-2PLI-DI

2" LINEAR PENDANT  
DIRECT/INDIRECT

Narrow 2" aperture with one piece extruded aluminum housing  
Individual or continuous runs available in 4' increments  
Lumen outputs ranging from 250lm/ft to 750lm/ft  
80+ CRI LED system available in 3000K and 3500K  
Universal voltage, 0-10V integral drivers with 100-1% dimming range  
Extruded acrylic lens with optimal performance and glare control



**10 DAY QUICKSHIP**  
**Max Order Size: 400'**

## ORDERING INFORMATION

|                   |                      |              |                      |
|-------------------|----------------------|--------------|----------------------|
| <b>PROJECT:</b>   | <input type="text"/> | <b>TYPE:</b> | <input type="text"/> |
| <b>CATALOG #:</b> | <input type="text"/> | <b>DATE:</b> | <input type="text"/> |

| CAT. NO  | LUMEN OUTPUT (DIRECT)  | LUMEN OUTPUT (INDIRECT)  | CRI  | COLOR TEMP  |
|--|--|--|--|---|
| <b>3GQ-2PLI-DI</b>   | <b>L250</b> - LOW OUTPUT (250 LM/FT)<br><b>L500</b> - MEDIUM OUTPUT (500 LM/FT)<br><b>L750</b> - HIGH OUTPUT (750 LM/FT) | <b>L250</b> - LOW OUTPUT (250 LM/FT)<br><b>L500</b> - MEDIUM OUTPUT (500 LM/FT)<br><b>L750</b> - HIGH OUTPUT (750 LM/FT) | <b>S80</b> - 83+ CRI                               | <b>30K</b> - 3000K<br><b>35K</b> - 3500K  |
| VOLTAGE  | DRIVER   | LENS OPTION (DIRECT)   | LENS OPTION (INDIRECT)                             | FINISH  |
| <b>UNV</b> - 120-277V                                      | <b>DIM</b> - 0-10V (STANDARD - 100-1%)   | <b>FL</b> - FLUSH  | <b>FL</b> - FLUSH<br><b>WSO</b> - WIDESPREAD OPTIC | <b>WH</b> - WHITE<br><br><small>All mounting canopies provided in white</small> |
| CABLE LENGTH   | CIRCUITING   | LENGTH (FEET)  |  |   |
| <b>60</b> - 60"<br><b>120</b> - 120"                       | <b>1C</b> - 1 CIRCUIT<br><b>2C</b> - 2 CIRCUIT   | <b>S - 4'</b> - 4' LONG<br><b>S - 8'</b> - 8' LONG<br><b>S - __'</b> (STRAIGHT RUN)*                                     |  |   |
| <small>*Continuous runs available in 4' increments</small> |  |  |  |   |

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program MAR 3, 2021



Copyright 2019 3G Lighting | www.3glighting.com | P: 905-850-2305 TF: 888-448-0440  
3G reserves the right to change, without notice, specifications or materials for product improvement.







**3GQ-2PLI-DI**

2" LINEAR PENDANT - DIRECT/INDIRECT

**DRAWINGS AND DIMENSIONS**

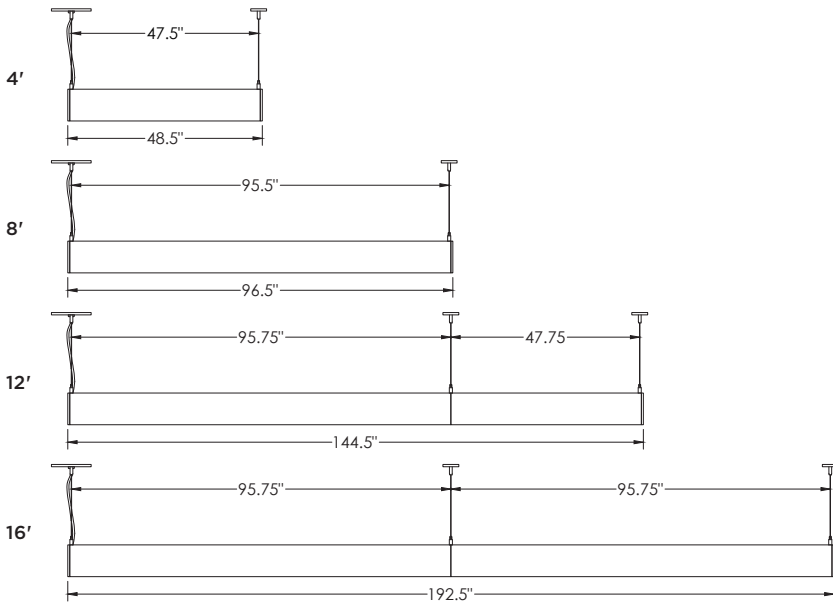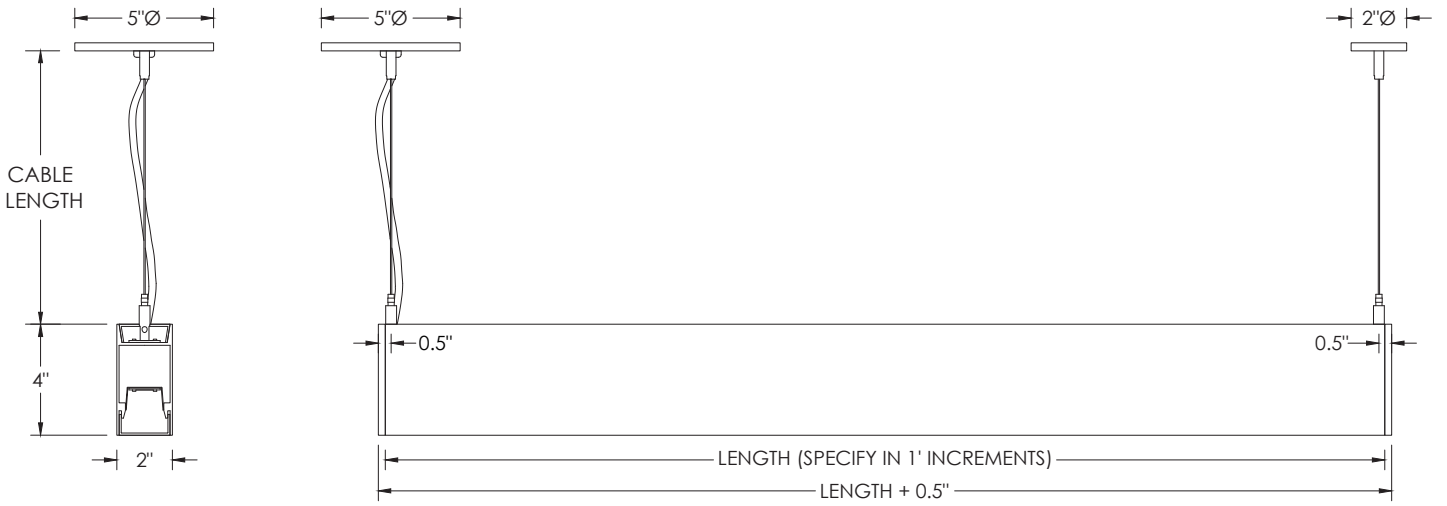

**RUN CHART (CONTINUOUS RUNS)**

| Run Length | Section Lengths | Run Length | Section Lengths   |
|------------|-----------------|------------|-------------------|
| 12'        | 8'+4'           | 36'        | 8'+8'+8'+8'       |
| 16'        | 8'+8'           | 36'        | 8'+8'+8'+8'+4'    |
| 20'        | 8'+8'+4'        | 40'        | 8'+8'+8'+8'+8'    |
| 24'        | 8'+8'+8'        | 44'        | 8'+8'+8'+8'+8'+4' |
| 28'        | 8'+8'+8'+8'     | 48'        | 8'+8'+8'+8'+8'+8' |

