3G-RRU24
24” RECESSED RUBO

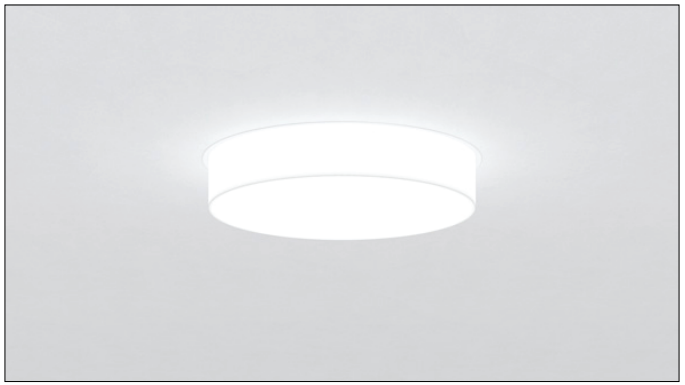

ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS



RUBO



BAR HANGERS (OPTIONAL)

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

3G LIGHTING

3G-RRU24
24" RECESSED RUBO
TRIM

INSTALLATION INSTRUCTIONS

1

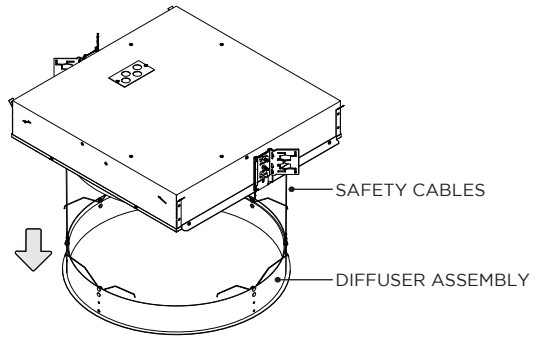

REMOVE DIFFUSER ASSEMBLY FROM FIXTURE HOUSING
DETACH SAFETY CABLES

2 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

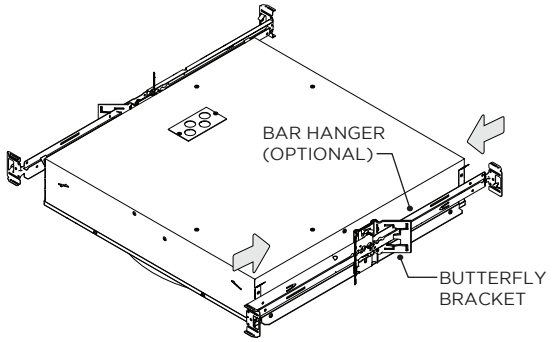

3

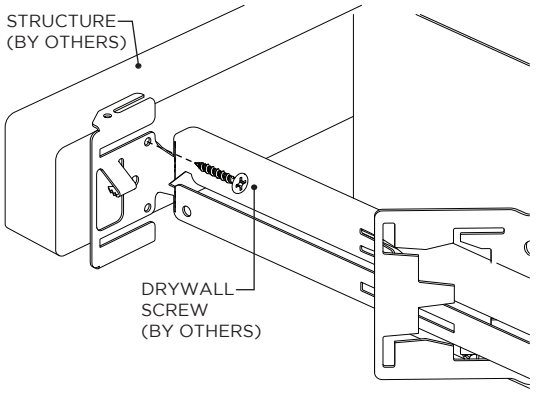

4 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

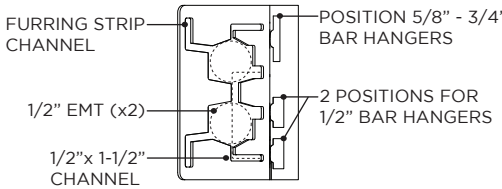

BUTTERFLY BRACKET
SIDE VIEW

5

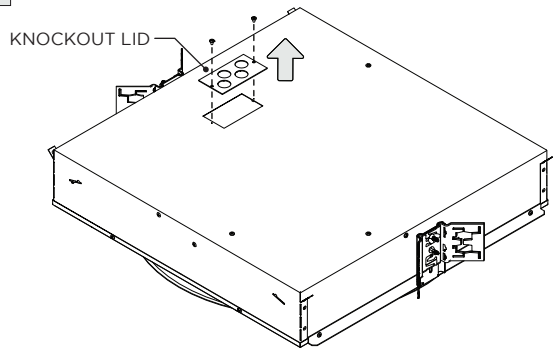

5A

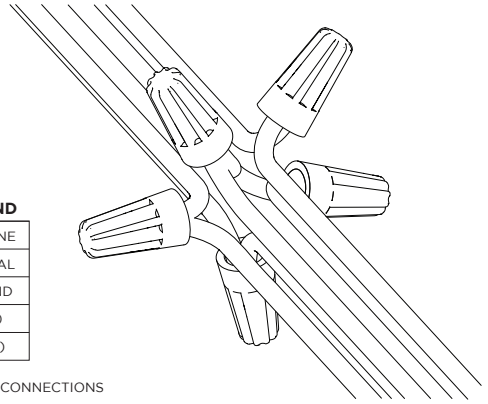

WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS

6 CEILING CUTOUT

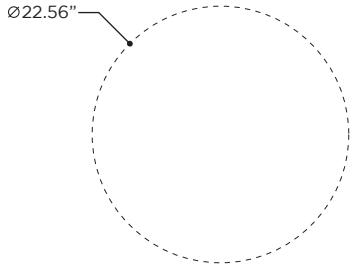

FIXTURE TYPE	CEILING HOLE SIZE
RRU24	Ø22.56"

INSTALL CEILING BELOW FIXTURE

7

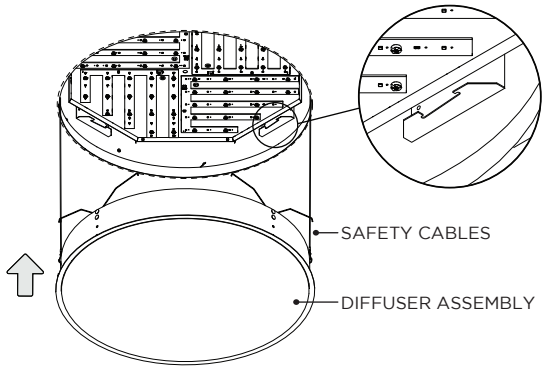

REATTACH SAFETY CABLES
ENGAGE DIFFUSER ASSEMBLY SPRINGS TO HOUSING CLIPS

DRIVER SERVICING

1

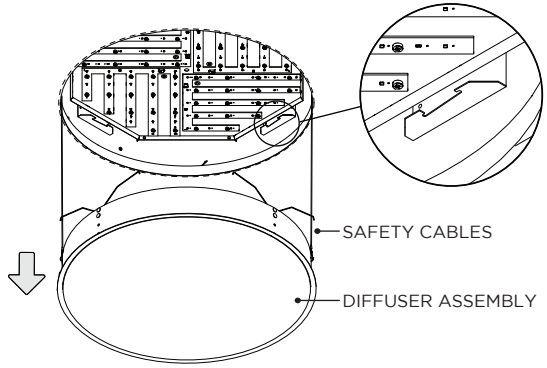

DISENGAGE DIFFUSER ASSEMBLY SPRINGS FROM HOUSING CLIPS
DETACH SAFETY CABLES

2

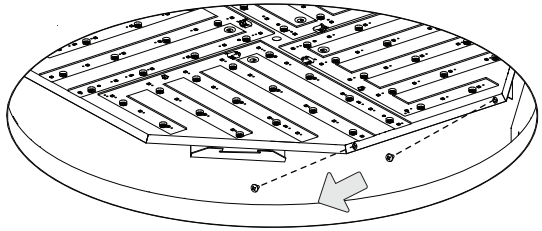

REMOVE SCREWS
SWING OUT AND REMOVE LED TRAY

2A

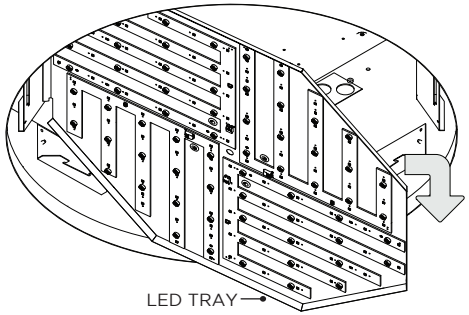

3

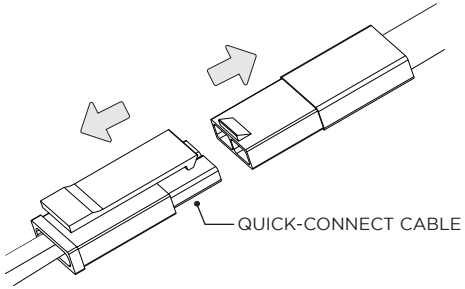

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS

4

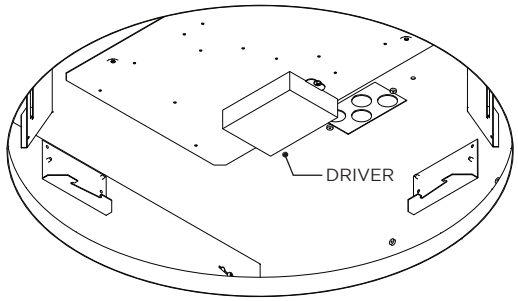

DRIVER LOCATED BEHIND LED TRAY
SERVICE DRIVER AND REASSEMBLE FIXTURE

LED SERVICING

1

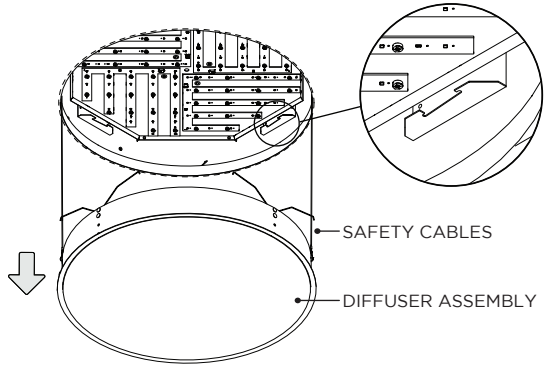

DISENGAGE DIFFUSER ASSEMBLY SPRINGS FROM HOUSING CLIPS
DETACH SAFETY CABLES

2

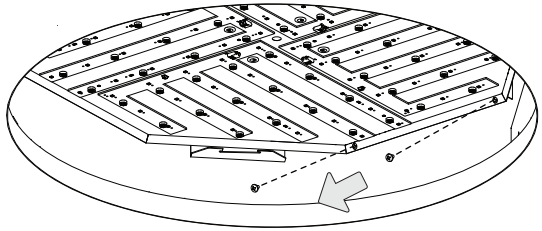

REMOVE SCREWS
SWING OUT AND REMOVE LED TRAY

2A

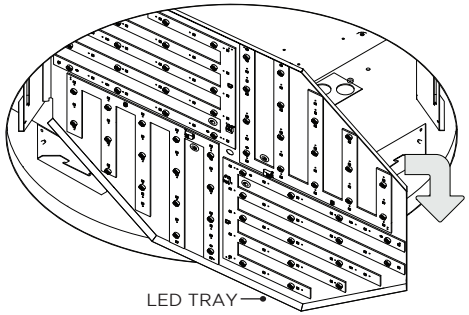

3

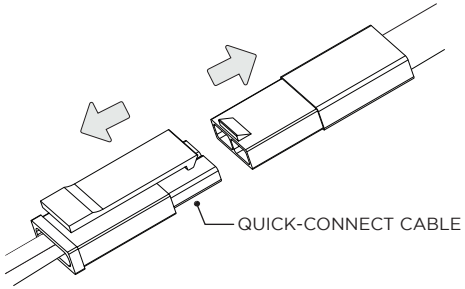

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS
REPLACE LED TRAY AND REASSEMBLE FIXTURE