



3GQ-4PLI-D

3.5" LINEAR PENDANT
DIRECT

3.5" aperture with one piece extruded aluminum housing
Individual or continuous runs available in 4' increments
Lumen outputs ranging from 250lm/ft to 1000lm/ft
80+ CRI LED system available in 3000K and 3500K
Universal voltage, 0-10V integral drivers with 100-1% dimming range
Extruded acrylic lens with optimal performance and glare control



10 DAY QUICKSHIP
Max Order Size: 400'

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	VOLTAGE
3GQ-4PLI-D	L250 - LOW OUTPUT (250 LM/FT) L500 - MEDIUM OUTPUT (500 LM/FT) L750 - HIGH OUTPUT (750 LM/FT) L1000 - VERY HIGH OUTPUT (1000 LM/FT)	S80 - 83+ CRI	30K - 3000K 35K - 3500K	UNV - 120/277V

DRIVER	LENS OPTION	FINISH	CABLE LENGTH
DIM - 0-10V (STANDARD 100-1%)	FL - FLUSH	WH - WHITE (STANDARD) All mounting canopies provided in white as standard	60 - 60" (STANDARD) 120 - 120"

LENGTH (FEET)
S - 4' - 4' LONG S - 8' - 8' LONG S - ___' (STRAIGHT RUN)*

*Continuous runs available in 4' increments

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program MAR 3, 2021



Copyright 2019 3G Lighting | www.3glighting.com | P: 905-850-2305 TF: 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.






3GQ-4PLI-D

3.5" LINEAR PENDANT DIRECT

DRAWINGS AND DIMENSIONS

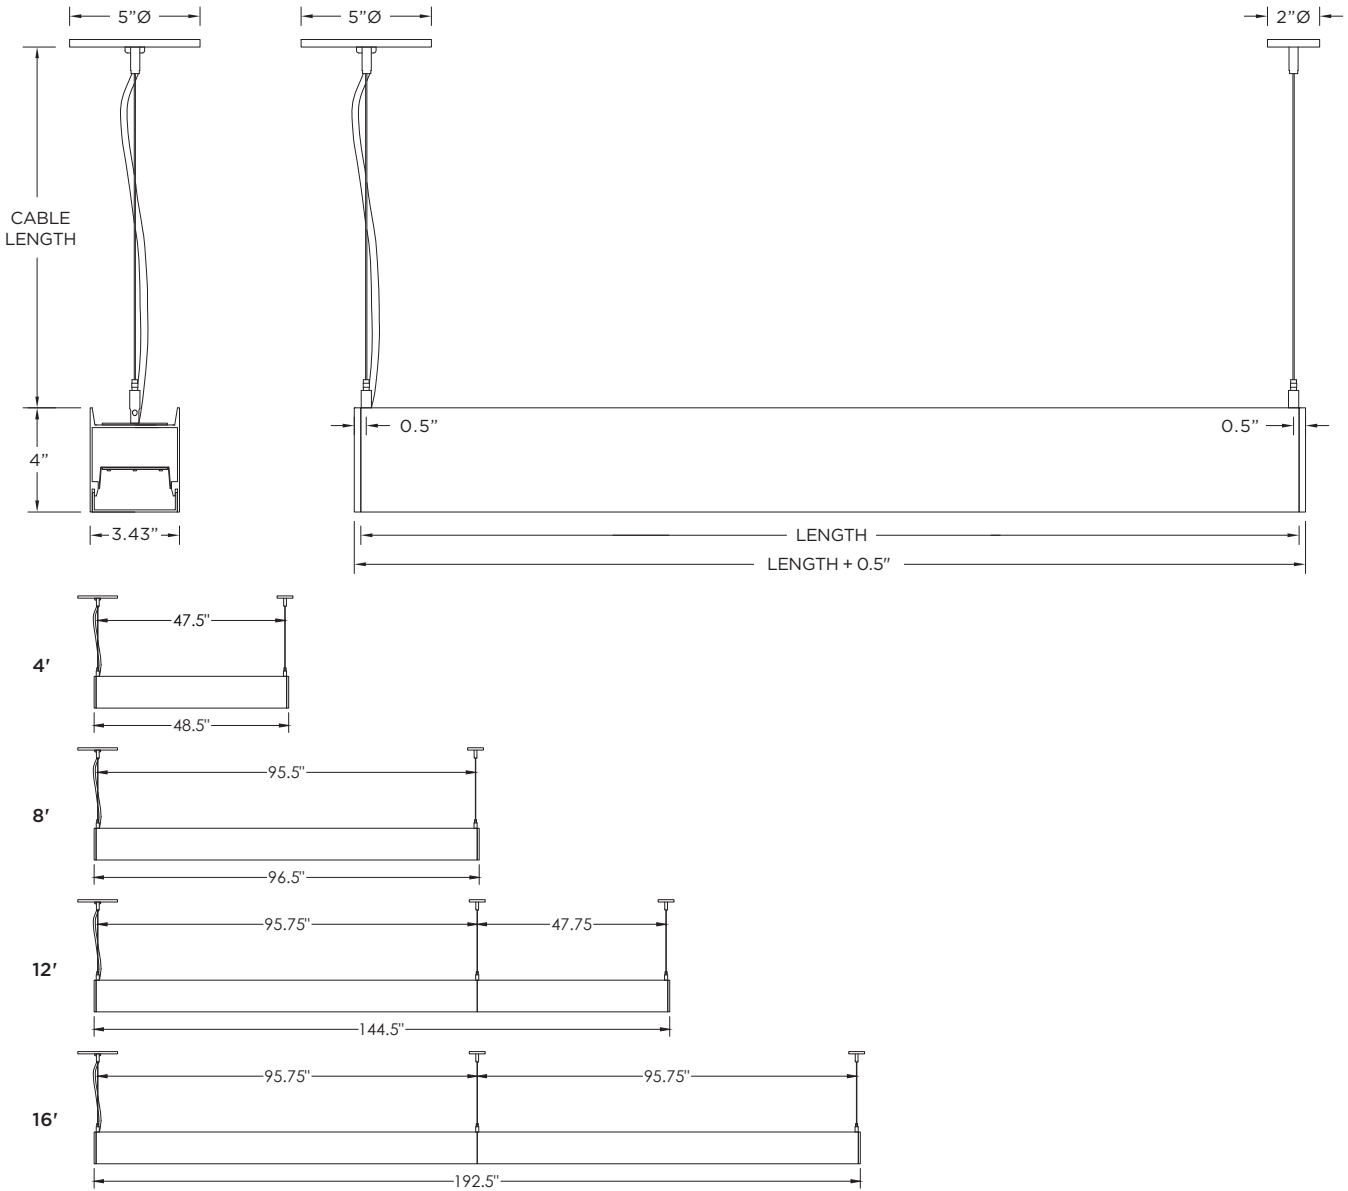

RUN CHART (CONTINUOUS RUNS)

Run Length	Section Lengths	Run Length	Section Lengths
12'	8'+4'	36'	8'+8'+8'+8'
16'	8'+8'	36'	8'+8'+8'+8'+4'
20'	8'+8'+4'	40'	8'+8'+8'+8'+8'
24'	8'+8'+8'	44'	8'+8'+8'+8'+8'+4'
28'	8'+8'+8'+8'	48'	8'+8'+8'+8'+8'+8'

