



3GQ-4PLI-DI

3.5" LINEAR PENDANT
DIRECT/INDIRECT

3.5" aperture with one piece extruded aluminum housing
Individual or continuous runs available in 4' increments
Lumen outputs ranging from 250lm/ft to 1000lm/ft
80+ CRI LED system available in 3000K and 3500K
Universal voltage, 0-10V integral drivers with 100-1% dimming range
Extruded acrylic lens with optimal performance and glare control



10 DAY QUICKSHIP
Max Order Size: 400'

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LUMEN OUTPUT (DIRECT)	LUMEN OUTPUT (INDIRECT)	CRI	COLOR TEMP
3GQ-4PLI-DI	L250 - LOW OUTPUT (250 LM/FT)	L250 - LOW OUTPUT (250 LM/FT)	S80 - 83+ CRI	30K - 3000K 35K - 3500K
	L500 - MEDIUM OUTPUT (500 LM/FT)	L500 - MEDIUM OUTPUT (500 LM/FT)		
	L750 - HIGH OUTPUT (750 LM/FT)	L750 - HIGH OUTPUT (750 LM/FT)		
	L1000 - VERY HIGH OUTPUT (1000 LM/FT)	L1000 - VERY HIGH OUTPUT (1000 LM/FT)		

VOLTAGE	DRIVER	LENS OPTION (DIRECT)	LENS OPTION (INDIRECT)	FINISH
UNV - 120-277V	DIM - 0-10V (STANDARD - 100-1%)	FL - FLUSH	FL - FLUSH WSO - WIDESPREAD OPTIC	WH - WHITE

All mounting canopies provided in white as standard

CABLE LENGTH	CIRCUITING	OPTIONS
60 - 60" 120 - 120"	1C - 1 CIRCUIT 2C - 2 CIRCUIT	S - 4' - 4' LONG S - 8' - 8' LONG S - ___' (STRAIGHT RUN)*

*Continuous runs available in 4' increments

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program MAR 3, 2021



Copyright 2019 3G Lighting | www.3glighting.com | P: 905-850-2305 TF: 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.







3GQ-4PLI-DI

3.5" LINEAR PENDANT - DIRECT/INDIRECT

DRAWINGS AND DIMENSIONS

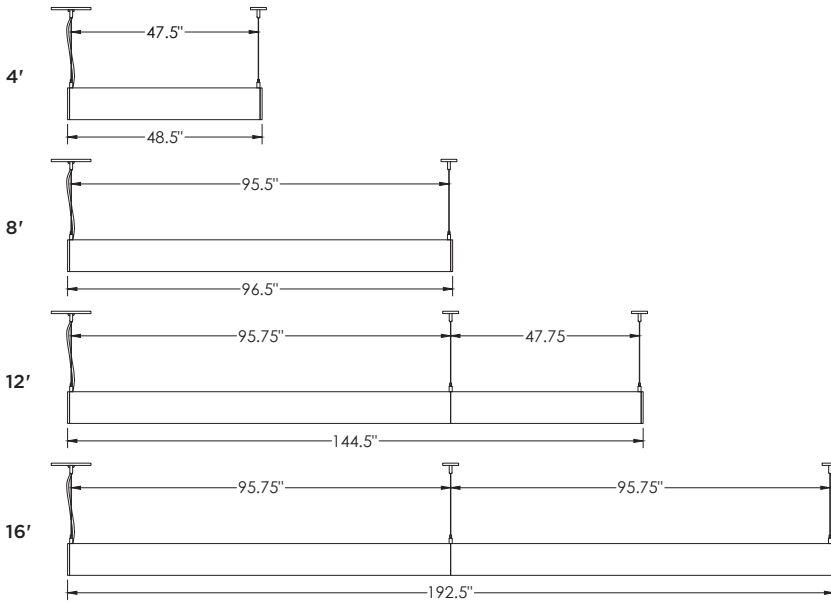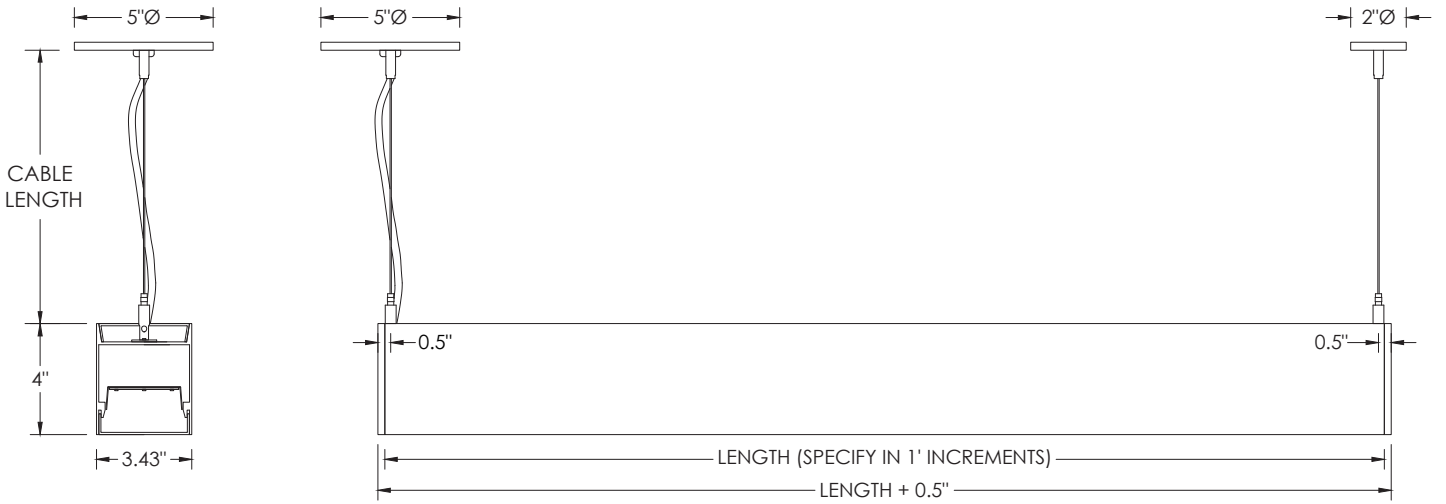

RUN CHART (CONTINUOUS RUNS)

Run Length	Section Lengths	Run Length	Section Lengths
12'	8'+4'	36'	8'+8'+8'+8'
16'	8'+8'	36'	8'+8'+8'+8'+4'
20'	8'+8'+4'	40'	8'+8'+8'+8'+8'
24'	8'+8'+8'	44'	8'+8'+8'+8'+8'+4'
28'	8'+8'+8'+8'	48'	8'+8'+8'+8'+8'+8'

