




3GQ-4PLI-DI

3.5" LINEAR PENDANT
DIRECT/INDIRECT

3.5" aperture with one piece extruded aluminum housing
DLC listed with performance up to 144 lumens per watt
Individual or continuous runs available (see quickship run chart)
Direct/Indirect distribution with lumen outputs ranging from 250lm/ft to 1000lm/ft
Universal voltage, 0-10V integral drivers with 100-1% dimming range
Suitable for drywall, grid, wood, and other architectural ceilings
Extruded acrylic lens with optimal performance and glare control

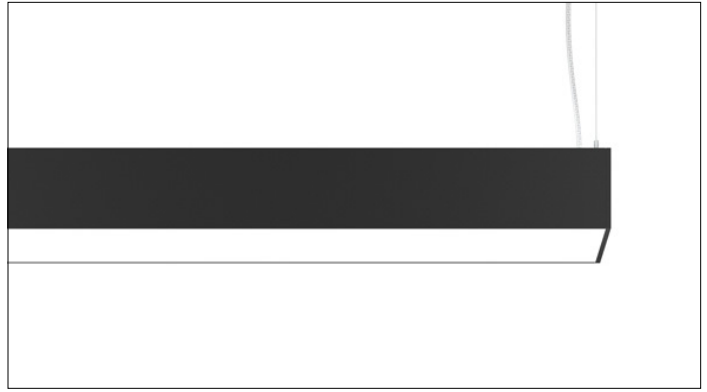

10 DAY QUICKSHIP
MAX ORDER SIZE: 400'



PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:


CAT. NO	LUMEN OUTPUT (DIRECT)	LUMEN OUTPUT (INDIRECT)	CRI	COLOR TEMP
3GQ-4PLI-DI	D250 - 250 LM/FT D500 - 500 LM/FT D750 - 750 LM/FT D1000 - 1000 LM/FT	L250 - 250 LM/FT L500 - 500 LM/FT L750 - 750 LM/FT L1000 - 1000 LM/FT	S80 - 80+ CRI H90 - 90+ CRI	30K - 3000K 35K - 3500K 40K - 4000K

VOLTAGE	DRIVER	LENS OPTION (DIRECT)	LENS OPTION (INDIRECT)	FINISH
UNV - 120/277V	DIM - 0-10V (100-1%)	FL - FLUSH	FL - FLUSH WSO - WIDESPREAD OPTIC	WH - WHITE BK - BLACK

All mounting canopies provided in white

CABLE LENGTH	CIRCUITING	RUN TYPE
60 - 60" 120 - 120" Clear braided cable	1C - SINGLE CIRCUIT 2C - DUAL CIRCUIT (SEPARATE DIRECT & INDIRECT)	S - STRAIGHT Individual fixtures available in 4', 5', 6', and 8' Continuous runs starting at 10' and 12' Runs longer than 12' available in 4' increments (16', 20', 24' etc)

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program

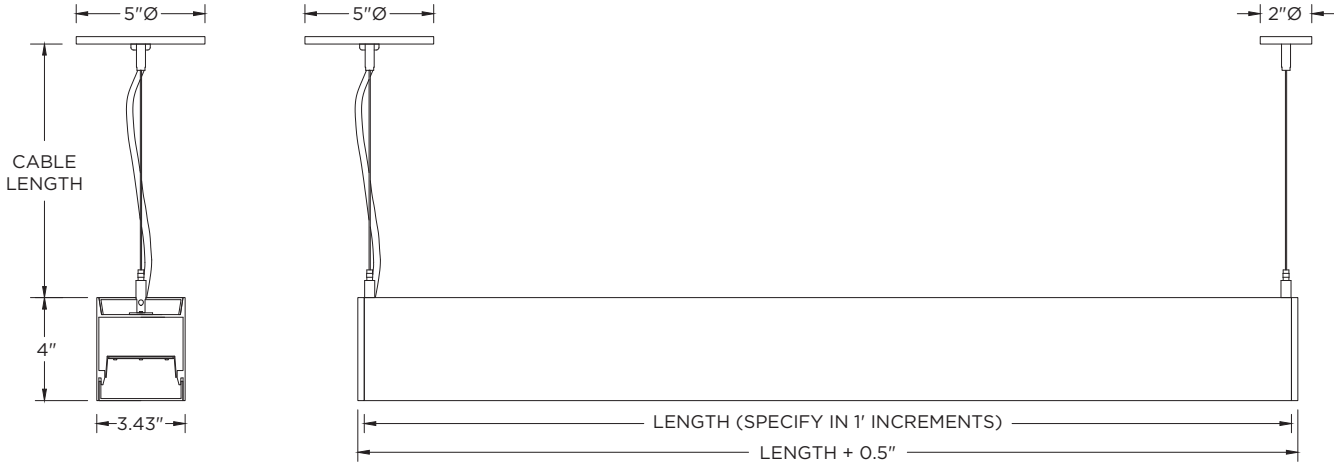




DIRECT LENS OPTION

INDIRECT LENS OPTION

FL - FLUSH

FL - FLUSH

WSO - WIDESPREAD



QUICKSHIP RUN CHART

RUN LENGTH	SECTION LENGTHS
4'	4'
5'	5'
6'	6'
8'	8'
10'	5'+5'

RUN LENGTH	SECTION LENGTHS
12'	8'+4'
16'	8'+8'
20'	8'+8'+4'
24'	8'+8'+8'
28'	8'+8'+8'+4'

RUN LENGTH	SECTION LENGTHS
32'	8'+8'+8'+8'
36'	8'+8'+8'+8'+4'
40'	8'+8'+8'+8'+8'
44'	8'+8'+8'+8'+8'+4'
48'	8'+8'+8'+8'+8'+8'