



3GQ-DL33RF70

3.3" ROUND FIXED 70mm
DOWNLIGHT



Small 3.3" deep regress, high performance downlight
Regressed LED source for enhanced glare control
Lumen range up to 2200lm
2 SCDM, Citizen LED source available in 30K and 35K (80+ CRI)
Universal voltage, 0-10V integral driver with 100-1% dimming range
Shallow housing available along with other housing options

10 DAY QUICKSHIP
Max Order Size: 50 pcs

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
3GQ-DL33RF70	10 - 1000 LUMENS	S80 - 80+ CRI	30K - 3000K	20D - 20°	UNV - 120/277V
	15 - 1500 LUMENS		35K - 3500K	40D - 40°	
	22 - 2200 LUMENS			60D - 60°	

DRIVER	FLANGE TYPE	BEVELED INSERT	HOUSING TYPE
DIM - 0-10V (STANDARD 100-1%)	WT - WHITE TRIM XTR - TRIMLESS ¹ (MUD-IN DRYWALL)	WI - WHITE	RMD - REMODEL (NON-IC) NCF - NEW CONSTRUCTION FRAME (NON-IC) SH - SHALLOW HOUSING (IC RATED & CP RATED) NC - NEW CONSTRUCTION HOUSING (CP RATED)

OPTIONS
CP - CHICAGO PLENUM ¹ BH - C-CHANNEL BAR HANGERS

¹ Chicago Plenum option available with Shallow Housing and New Construction Housing

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program FEBRUARY 8, 2024




3GQ-DL33RF70


3.3" ROUND FIXED 70mm DOWNLIGHT

TRIM HOUSING OPTIONS


RMD - Remodel (Non-IC)

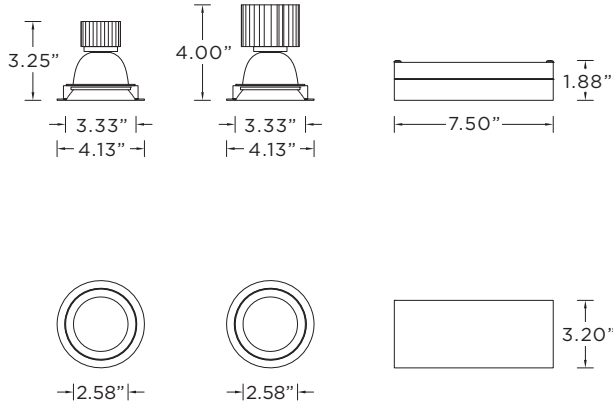


NCF - New Construction Frame (Non-IC)

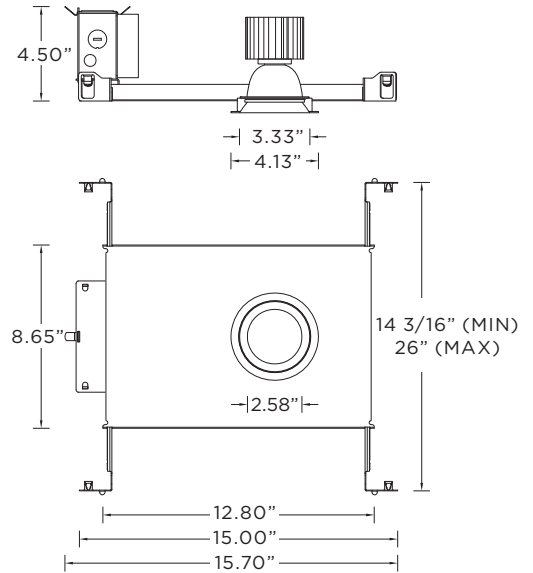

SH - Shallow Housing (IC and Chicago Plenum Rated)

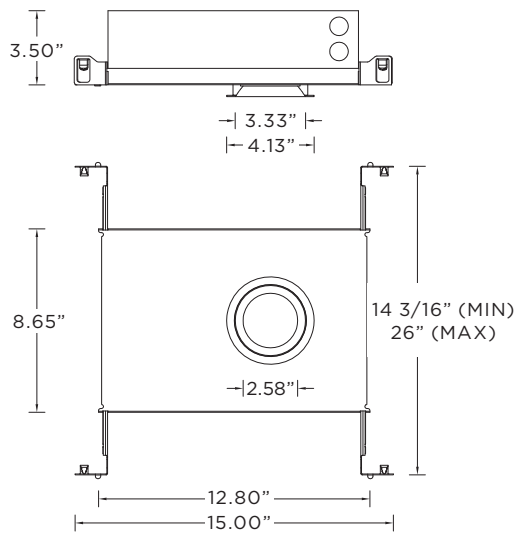

NC - New Construction Housing (Non-IC and CP rated)

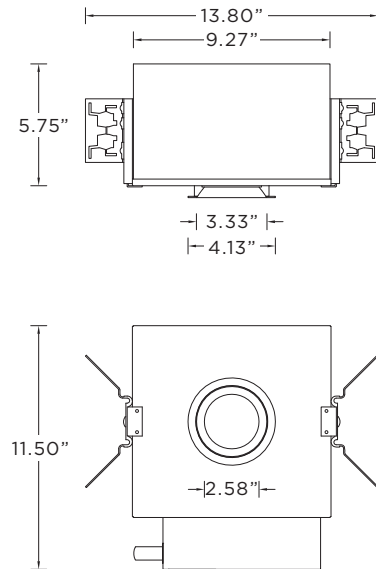




3GQ-DL33RF70


3.3" ROUND FIXED 70mm DOWNLIGHT

TRIMLESS HOUSING OPTIONS


RMD - Remodel (Non-IC)

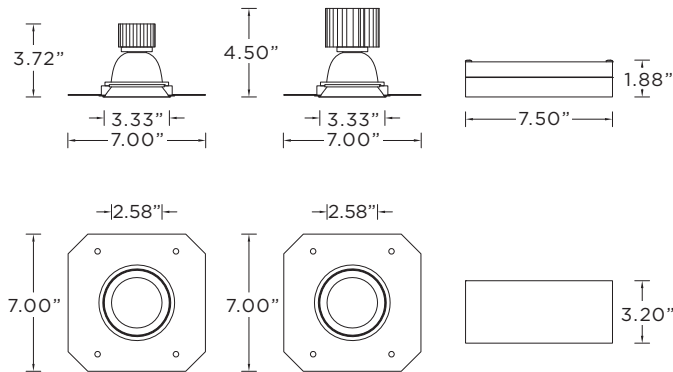

NCF - New Construction Frame (Non-IC)

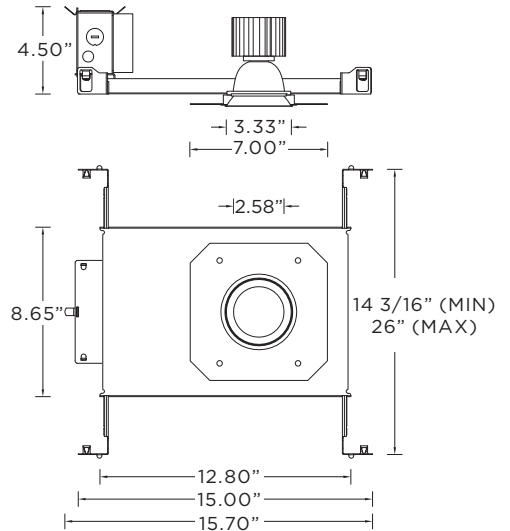

SH - Shallow Housing (IC and Chicago Plenum Rated)

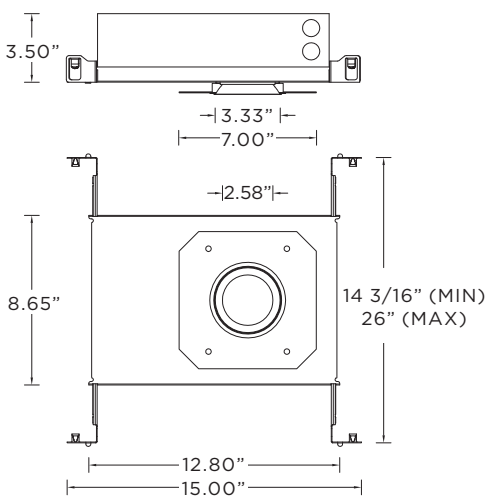

NC - New Construction Housing (Non-IC and CP rated)

