

# 3GQ 3GQ-DL45RA

4.5" ROUND ADJUSTABLE TRIM & TRIMLESS



4.5" adjustable high performance downlight  
 Hot aiming with 0°-40° lockable tilt and 362° lockable rotation  
 Lumen range of 1000lm to 2200lm (80+ CRI)  
 2 SDCM, Citizen LED source available in 30K and 35K (80+ CRI)  
 Universal voltage, 0-10V driver with 100-1% dimming range  
 Remodel housing available along with other housing options

**10 DAY QUICKSHIP**  
**Max Order Size: 50 pcs**

## ORDERING INFORMATION

<b>PROJECT:</b>	<input type="text"/>	<b>TYPE:</b>	<input type="text"/>
<b>CATALOG #:</b>	<input type="text"/>	<b>DATE:</b>	<input type="text"/>

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
<b>3GQ-DL45RA</b>	<b>10</b> - 1000 LUMENS	<b>S80</b> - 80+CRI	<b>30K</b> - 3000K	<b>20D</b> - 20°	<b>UNV</b> - 120/277V
	<b>15</b> - 1500 LUMENS		<b>35K</b> - 3500K	<b>40D</b> - 40°	
	<b>22</b> - 2200 LUMENS			<b>60D</b> - 60°	

DRIVER	FLANGE TYPE	BEVELED INSERT	HOUSING TYPE	OPTIONS
<b>DIM</b> - 0-10V (STANDARD 100-1%)	<b>WT</b> - WHITE <b>XTR</b> - TRIMLESS	<b>WI</b> - WHITE	<b>NC</b> - NEW CONSTRUCTION HOUSING (NON-IC & CP RATED) <b>IC</b> - NEW CONSTRUCTION IC HOUSING	<b>CP</b> - CHICAGO PLENUM <b>BH</b> - C-CHANNEL BAR HANGERS <b>SF70</b> - SOFTENING LENS (SUPPLIED STANDARD)  Maximum 1 optical accessory

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program EDITION 12/19




**3GQ-DL45RA**

4.5" ROUND ADJUSTABLE - TRIM & TRIMLESS

### TRIM HOUSING OPTIONS

**NC** - New Construction Housing (Non-IC) (Chicago Plenum Rated)

**IC** - New Construction IC Housing

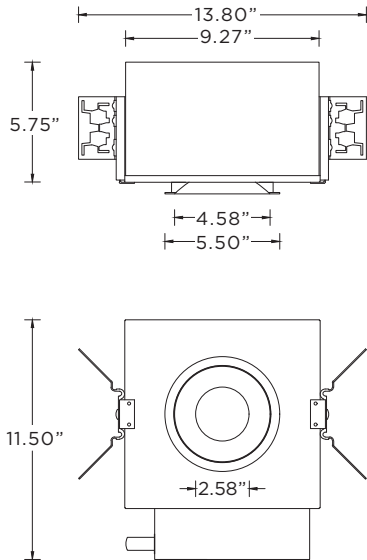

### TRIMLESS HOUSING OPTIONS

**NC** - New Construction Housing (Non-IC) (Chicago Plenum Rated)

**IC** - New Construction IC Housing

