



3GQ-RC2

2 LIGHT MADISON
TRIM & TRIMLESS

New construction housing with IC housing option available
 Trim fixture designed to conceal internal hardware
 Trimless fixture features a proprietary aluminum mudding flange
 Machined aluminum double gimbals. Adjustable and lockable
 Regressed LED source for enhanced glare control
 Lumen range of 1000lm to 3000lm
 2 SDCM, Citizen LED source available in 30K and 35K (80+ CRI)
 Universal voltage, 0-10V integral driver with 100-1% dimming range



10 DAY QUICKSHIP
Max Order Size: 50 pcs

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
3GQ-RC2	10 - 1000 LUMENS	S80 - 80+ CRI	30K - 3000K 35K - 3500K	20D - 20°	UNV - 120/277V
	15 - 1500 LUMENS			40D - 40°	
	22 - 2200 LUMENS			60D - 60°	
	30 - 3000 LUMENS				

DRIVER	FLANGE TYPE	GIMBAL FINISH	HOUSING INTERIOR
DIM - 0-10V (STANDARD 100-1%)	WT - WHITE TRIM (STANDARD) XTR - TRIMLESS	NG - NATURAL ALUMINUM BG - BLACK WG - WHITE	BK - BLACK

HOUSING TYPE	OPTIONS
NC - NEW CONSTRUCTION (NON-IC) IC - IC HOUSING ¹	CP - CHICAGO PLENUM BH - BAR HANGERS SF70 - SOFTENING LENS HXB70 - BLACK HEXCELL LOUVER
	Maximum 3 optical accessories

¹ IC Housing available up to 2200lm

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program MAR 3, 2021






3GQ-RC2

2 LIGHT MADISON - TRIM & TRIMLESS

TRIM HOUSING

- NC** - New Construction (Non-IC)
- IC** - IC Housing (2200lm max)
- CP** - Chicago Plenum Housing

LUMEN OUTPUT	A	B	C
Up to 2200lm	45°	45°	45°
3000lm	35°	45°	35°

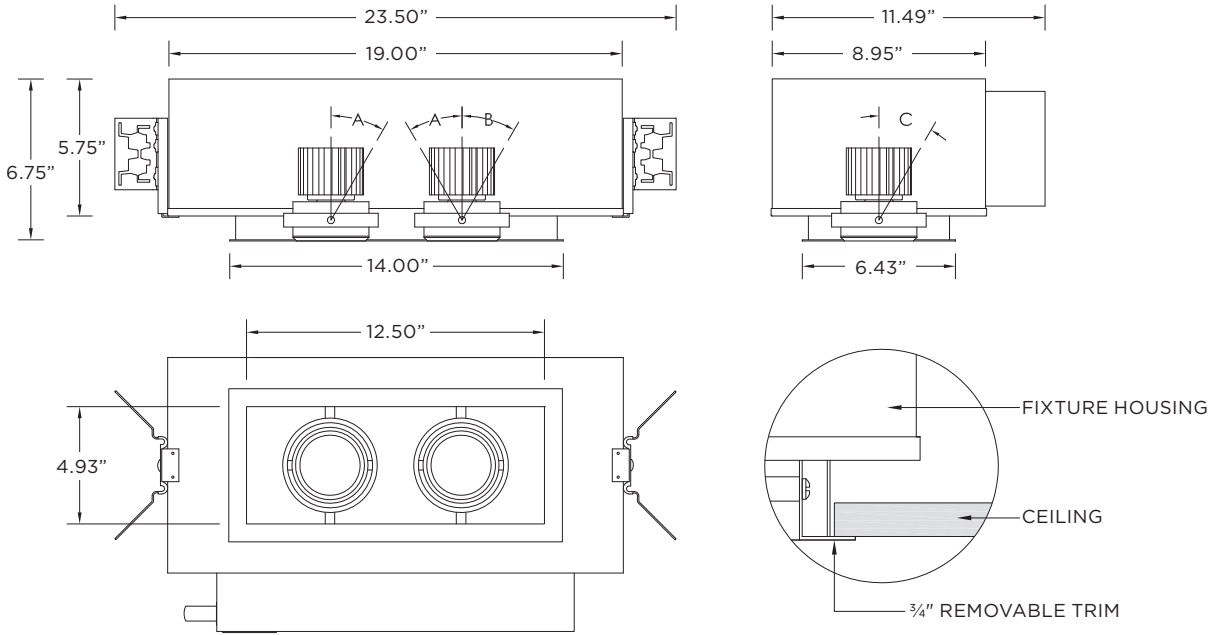

TRIMLESS HOUSING

- NC** - New Construction (Non-IC)
- IC** - IC Housing (2200lm max)
- CP** - Chicago Plenum Housing

LUMEN OUTPUT	A	B	C
Up to 2200lm	45°	45°	45°
3000lm	35°	45°	35°

