3G-PRU24
24” PENDANT RUBO
AIRCRAFT CABLE

ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS



RUBO

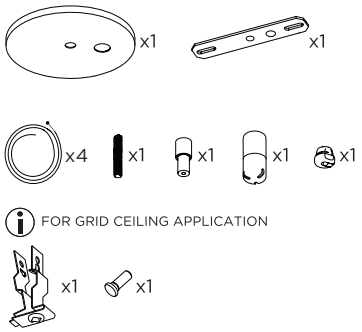

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

3G-PRU24
24” PENDANT RUBO
AIRCRAFT CABLE

INSTALLATION INSTRUCTIONS

DRYWALL SUSPENSION

1

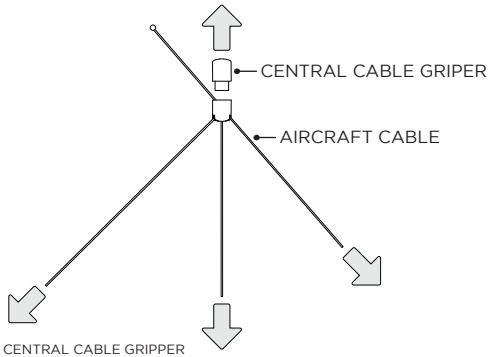

SEPARATE CENTRAL CABLE GRIPPER
INSERT THREE SHORTER AIRCRAFT CABLES THROUGH LOWER HALF OF CENTRAL CABLE GRIPPER

2

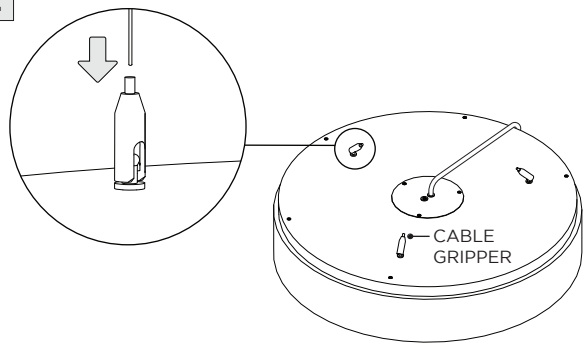

INSERT AIRCRAFT CABLES THROUGH CABLE GRIPPERS ON FIXTURE
CUT OFF EXCESS CABLE LENGTH

3

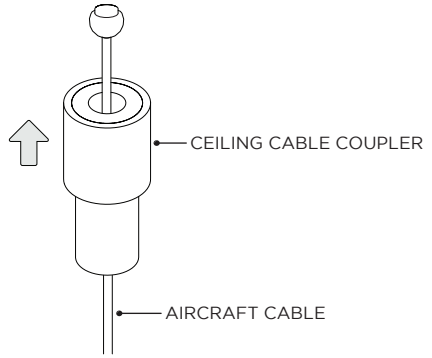

FEED CEILING CABLE COUPLER THROUGH LONGER AIRCRAFT CABLE

4

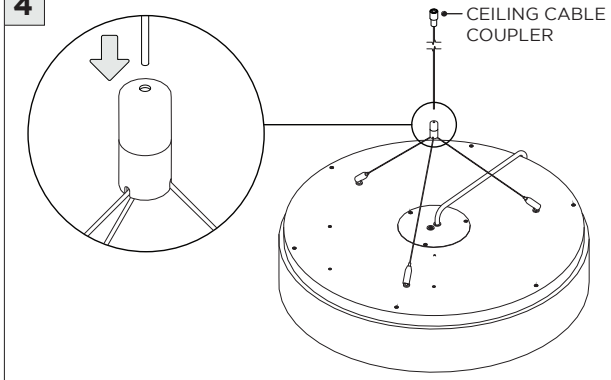

INSERT AIRCRAFT CABLE THROUGH CENTRAL CABLE GRIPPER

5

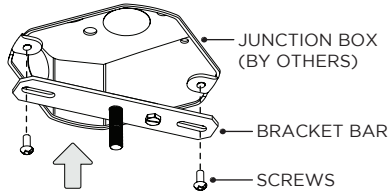

6

WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM+)
PURPLE	(DIM-)

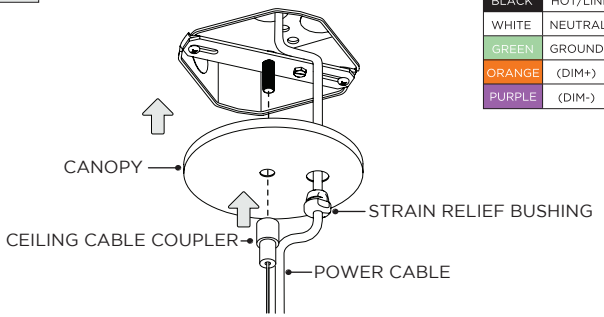

MAKE ELECTRICAL CONNECTIONS INSIDE JUNCTION BOX
SECURE CANOPY TO CEILING

7

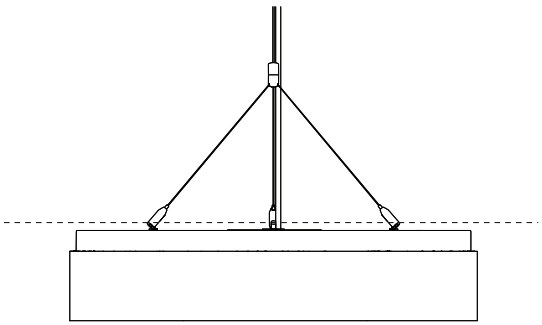

ENSURE FIXTURE IS LEVEL

3G LIGHTING

3G-PRU24
24" PENDANT RUBO
AIRCRAFT CABLE

INSTALLATION INSTRUCTIONS

GRID CEILING SUSPENSION

1

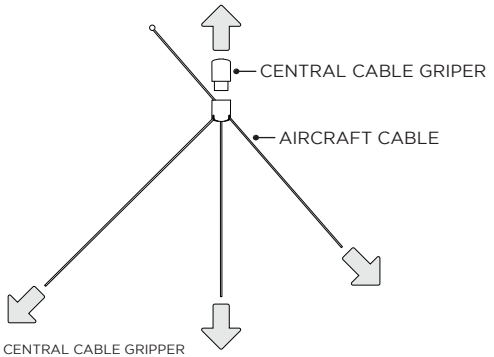

SEPARATE CENTRAL CABLE GRIPPER
INSERT THREE SHORTER AIRCRAFT CABLES THROUGH LOWER HALF OF CENTRAL CABLE GRIPPER

2

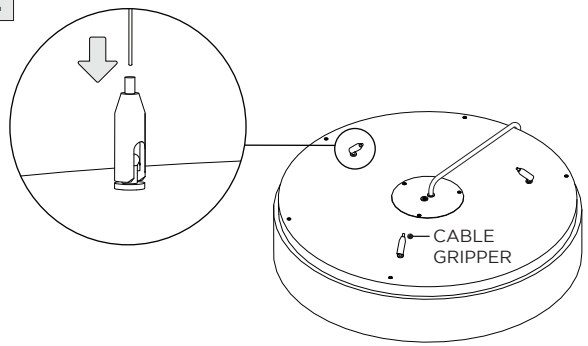

INSERT AIRCRAFT CABLES THROUGH CABLE GRIPPERS ON FIXTURE
CUT OFF EXCESS CABLE LENGTH

3

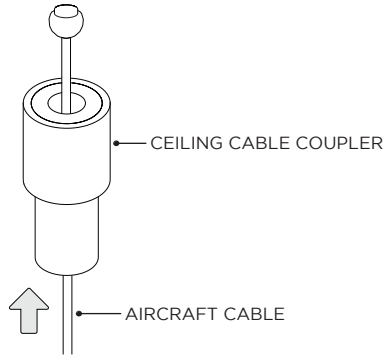

FEED CEILING CABLE COUPLER THROUGH LONGER AIRCRAFT CABLE

4

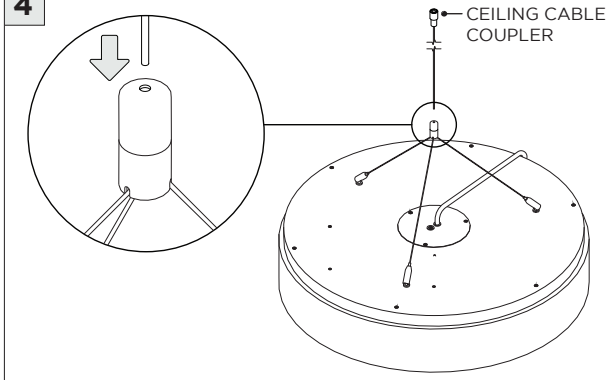

INSERT AIRCRAFT CABLE THROUGH CENTRAL CABLE GRIPPER

5 GRID CEILING SUSPENSION
JUNCTION BOX

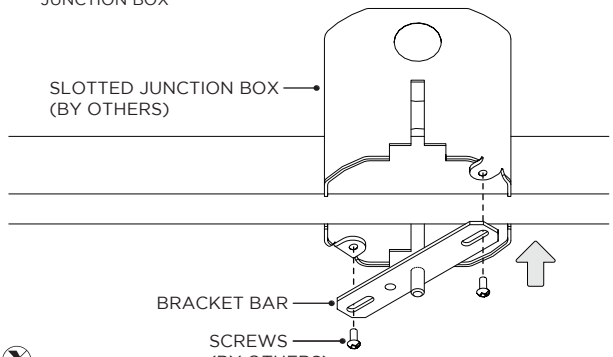

6

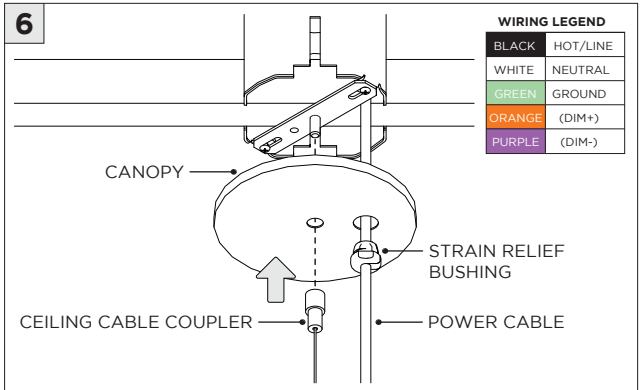

MAKE ELECTRICAL CONNECTIONS INSIDE JUNCTION BOX
SECURE CANOPY TO CEILING

7 GRID CEILING SUSPENSION
NO JUNCTION BOX

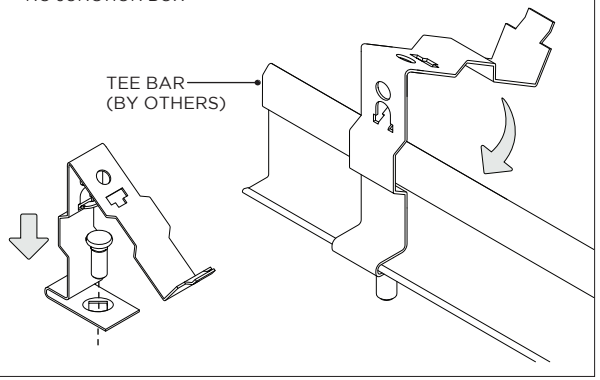

8

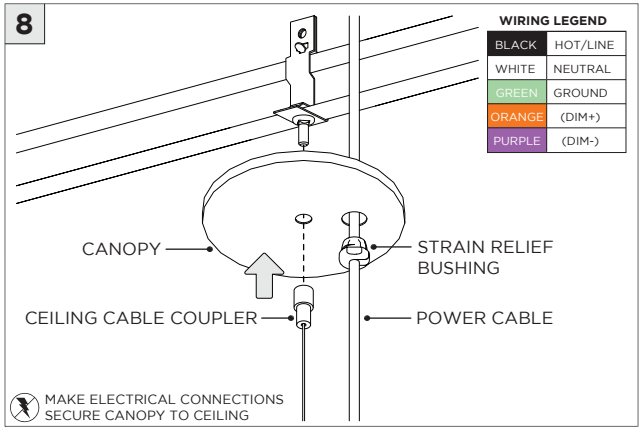

MAKE ELECTRICAL CONNECTIONS
SECURE CANOPY TO CEILING

9

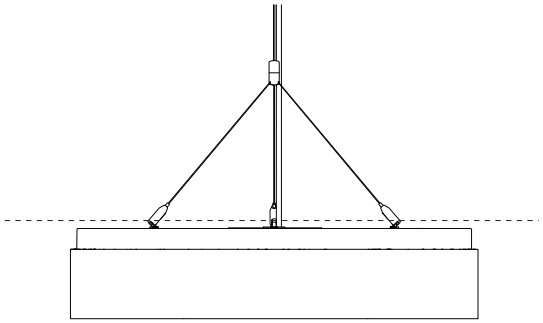

ENSURE FIXTURE IS LEVEL

DRIVER SERVICING

1

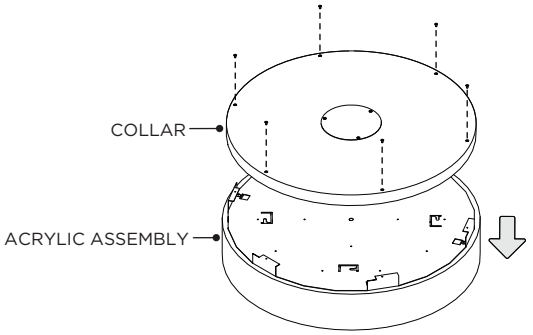

REMOVE ACRYLIC ASSEMBLY FROM COLLAR

1A

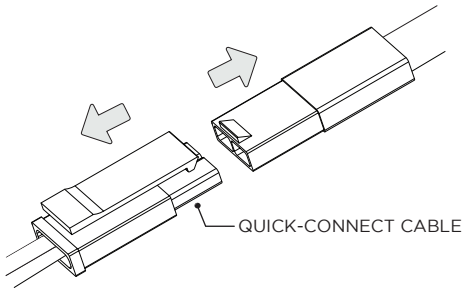

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS

2

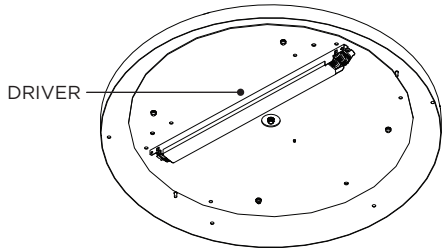

DRIVER IS LOCATED ON THE UNDERSIDE OF COLLAR
SERVICE DRIVER AND REASSEMBLE FIXTURE

LED SERVICING

1

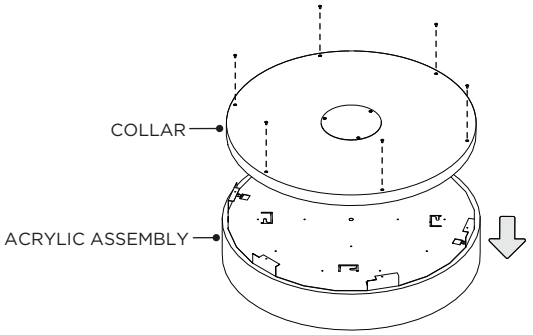

REMOVE ACRYLIC ASSEMBLY FROM COLLAR

2

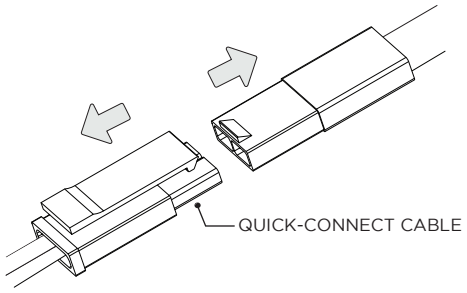

DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS
REPLACE ACRYLIC ASSEMBLY AND REASSEMBLE FIXTURE