








3G-PKU822/3G-PKU1222
8” MULTIPLE SQURE & 12” MULTIPLE SQUARE
PENDANT KUBO





THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS		
 KUBO	POWER FEED KIT	NON-POWER FEED KIT
	 FOR GRID CEILING APPLICATION 	 FOR GRID CEILING APPLICATION 



INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
 ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
 POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

SUSPENSION MOUNTING

PKU822

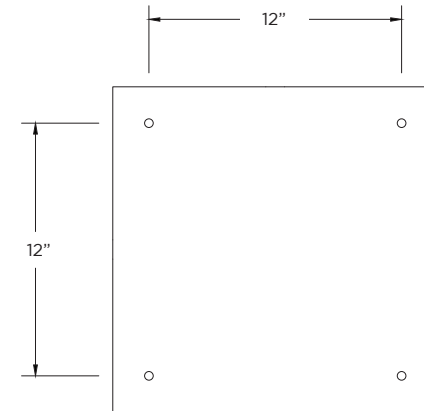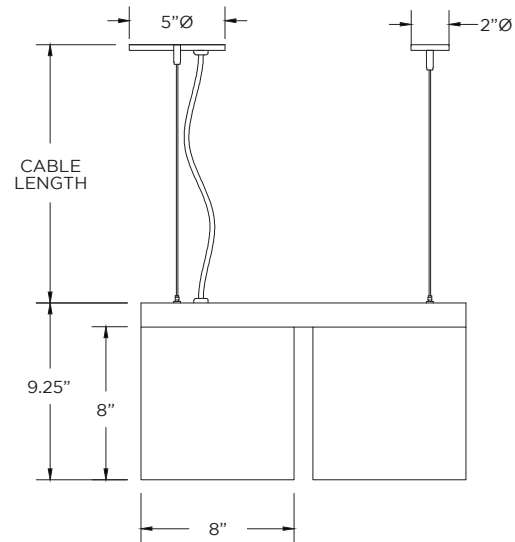


PKU1222

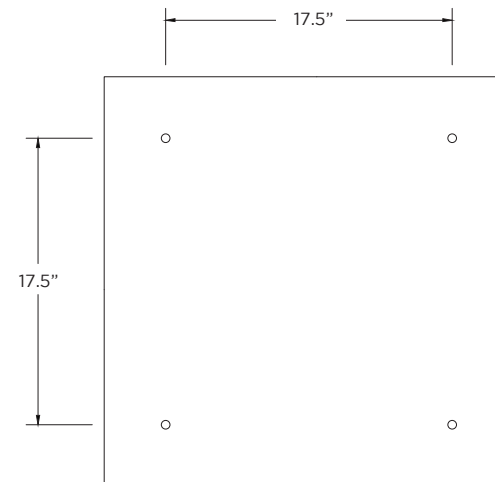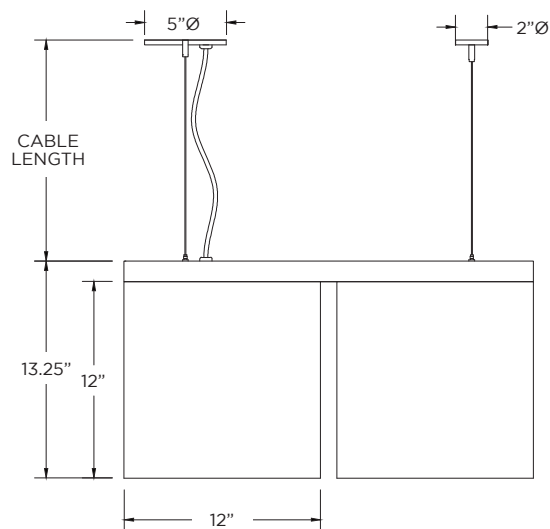

DRYWALL SUSPENSION


1

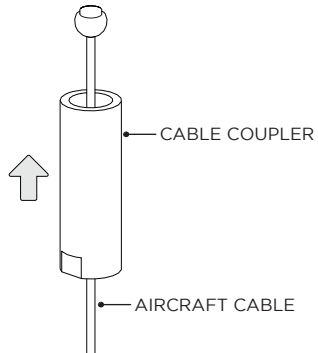


FEED AIRCRAFT CABLES THROUGH CABLE COUPLERS

2

POWER FEED SUSPENSION

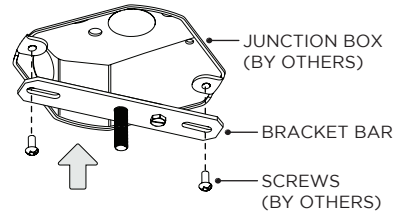

3

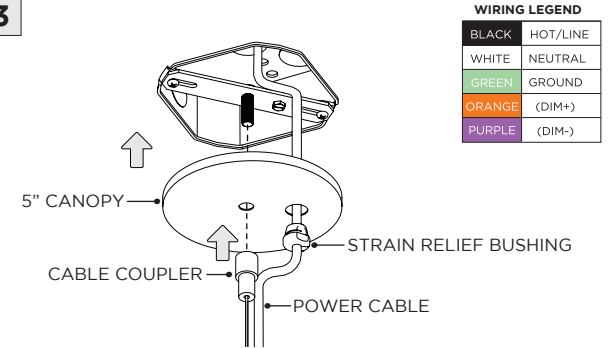

WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM+)
PURPLE	(DIM-)




MAKE ELECTRICAL CONNECTIONS INSIDE JUNCTION BOX
SECURE 5" CANOPY TO CEILING

4


NON-POWER FEED SUSPENSION



5

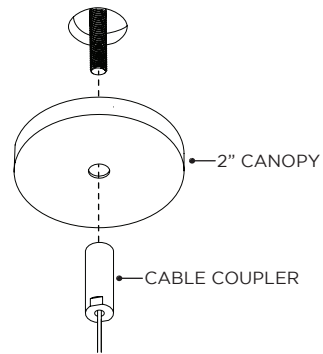


6

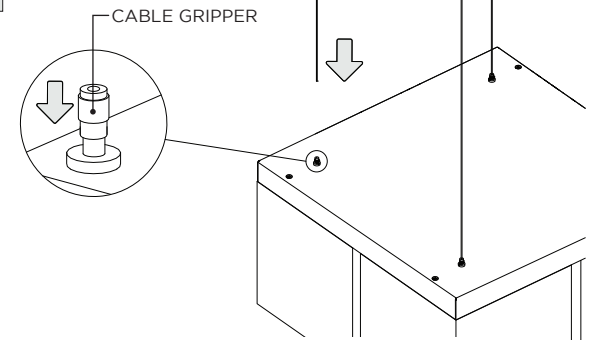

FEED AIRCRAFT CABLE THROUGH CABLE GRIPPER
LOOSEN AND PUSH DOWN ON CABLE GRIPPER TO ADJUST CABLE LENGTH
TIGHTEN CABLE GRIPPER TO LOCK POSITION


6A

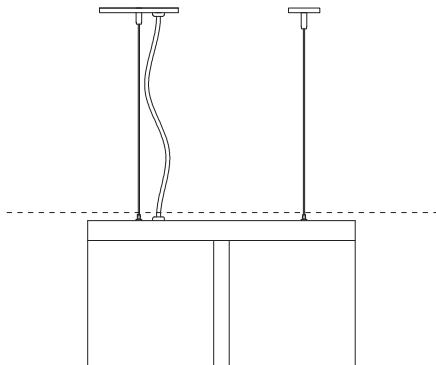

ENSURE FIXTURE IS LEVEL

GRID CEILING SUSPENSION

1

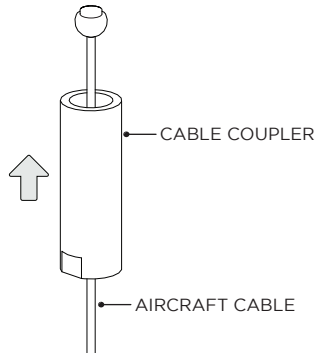


FEED AIRCRAFT CABLES THROUGH CABLE COUPLERS


2

POWER FEED SUSPENSION

IF NO JUNCTION BOX IS REQUIRED
REFER TO NON-POWER FEED SUSPENSION
STEPS FOR CANOPY MOUNTING

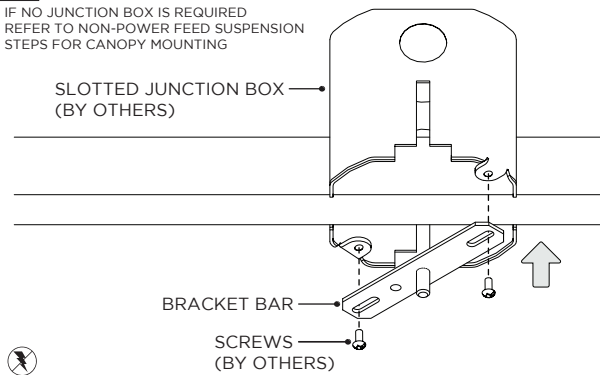


3

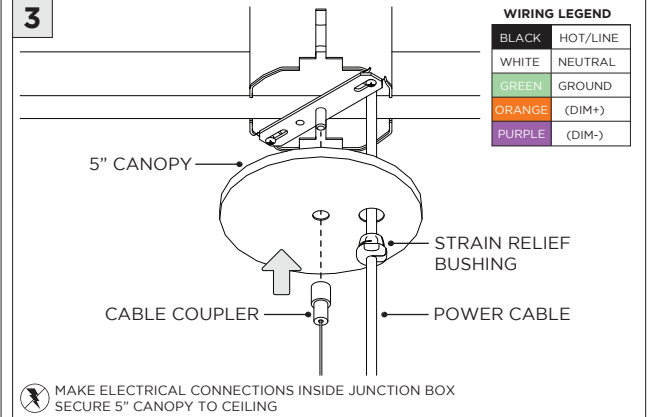


MAKE ELECTRICAL CONNECTIONS INSIDE JUNCTION BOX
SECURE 5" CANOPY TO CEILING

4

NON-POWER FEED SUSPENSION

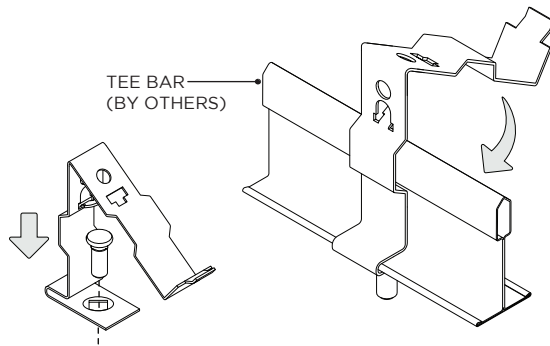


5

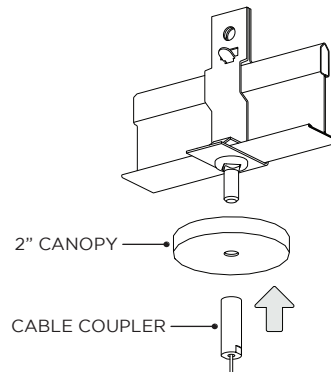


2" CANOPY USED FOR NON-POWER FEED SUSPENSION
5" CANOPY USED FOR POWER FEED SUSPENSION

6

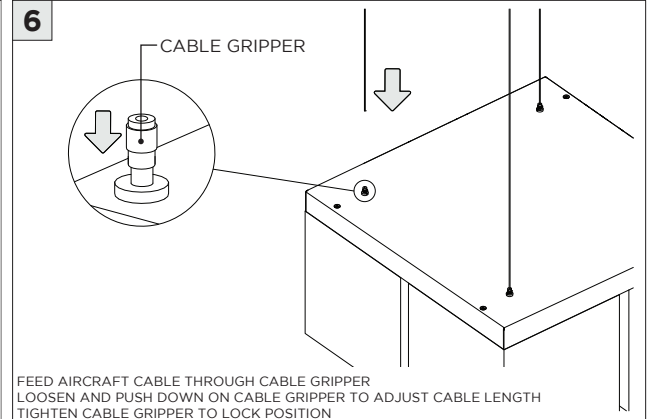

FEED AIRCRAFT CABLE THROUGH CABLE GRIPPER
LOOSEN AND PUSH DOWN ON CABLE GRIPPER TO ADJUST CABLE LENGTH
TIGHTEN CABLE GRIPPER TO LOCK POSITION


6A

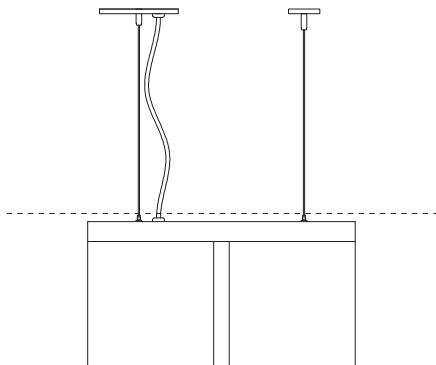


ENSURE FIXTURE IS LEVEL

DRIVER SERVICING

1

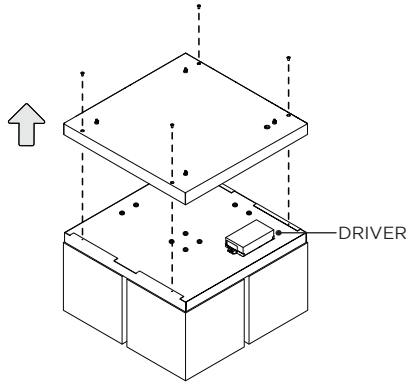


1A

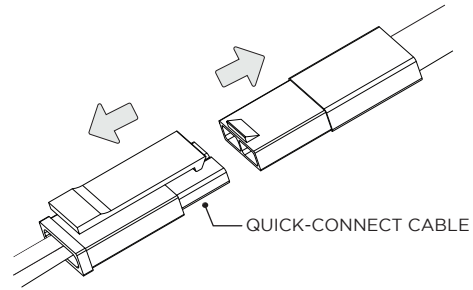


DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS
SERVICE DRIVER AND REASSEMBLE FIXTURE

LED SERVICING

1

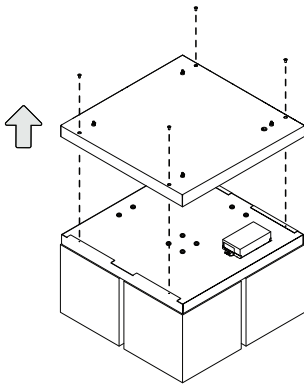


1A

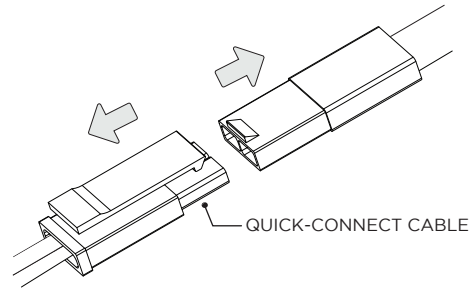


DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS

2

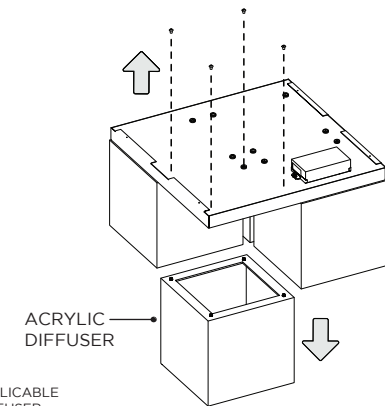

REMOVE APPLICABLE
ACRYLIC DIFFUSER

3

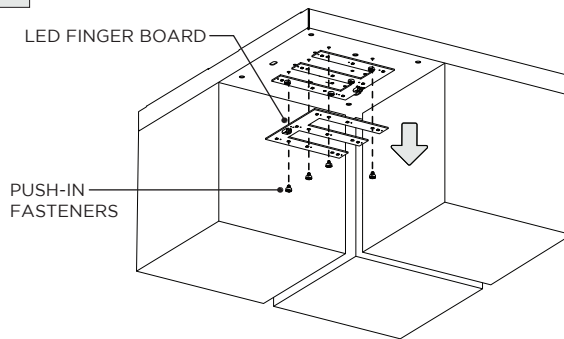

REPLACE LED FINGER BOARD AND REASSEMBLE FIXTURE