



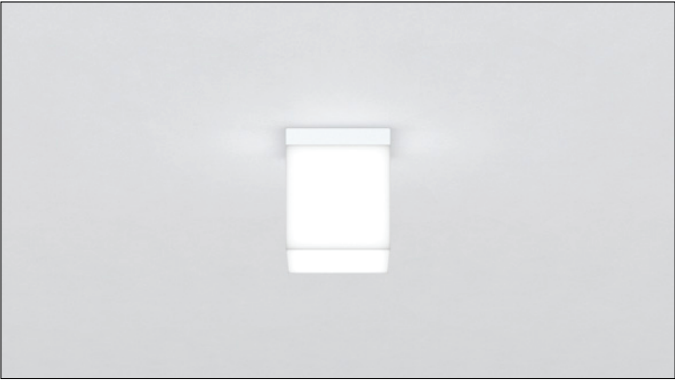

3G-SKU401, 3G-SKU801, and 3G-SKU1201
4", 8", and 12" SURFACE KUBO




THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
 KUBO	


INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
 ATTENTION	
 POWER ON	
 POWER OFF	

1

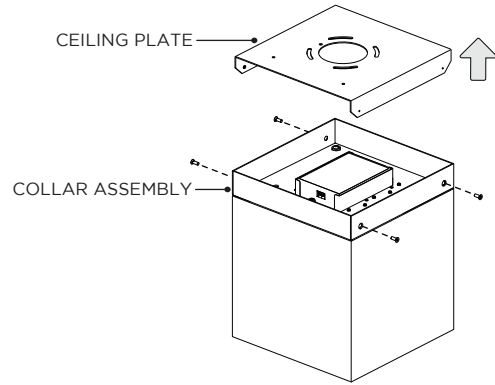


REMOVE CEILING PLATE FROM COLLAR ASSEMBLY

2

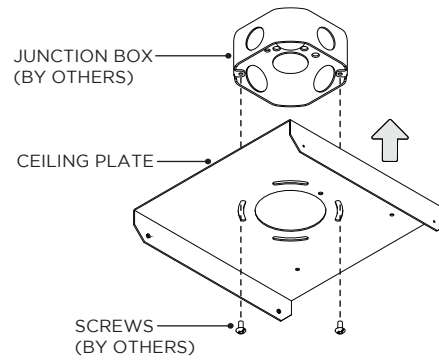

3

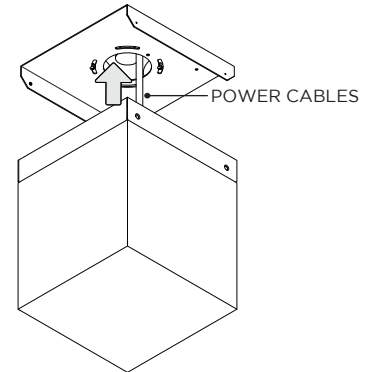


MAKE WIRING CONNECTIONS INSIDE JUNCTION BOX

3A


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

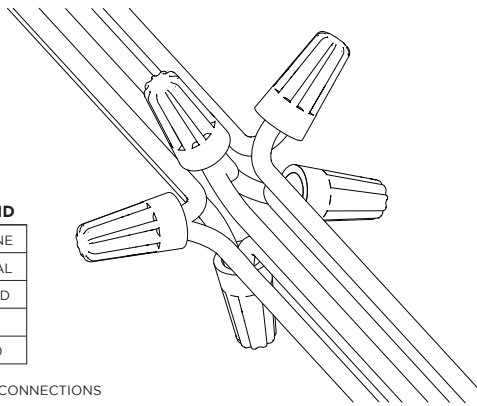

MAKE WIRING CONNECTIONS


4

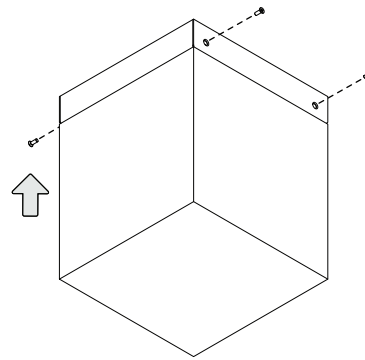


SECURE FIXTURE TO CEILING

DRIVER SERVICING

1

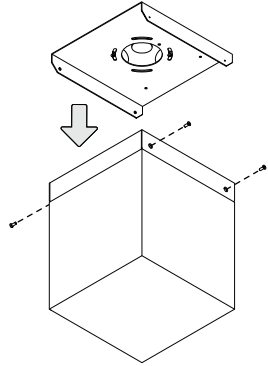


2

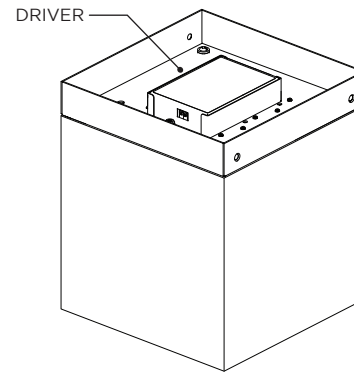


SERVICE DRIVER AND REASSEMBLE FIXTURE

LED SERVICING


1

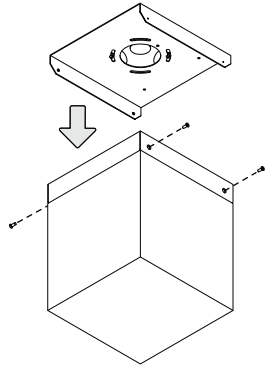

2

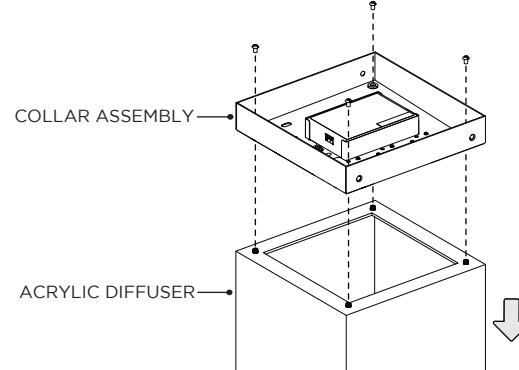


3

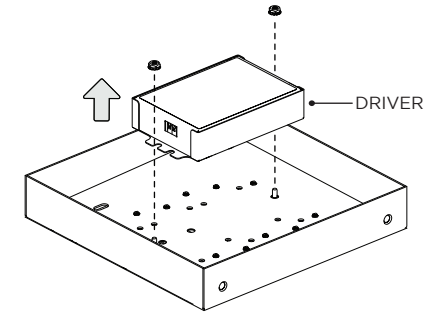


REMOVE AND DISCONNECT DRIVER FROM COLLAR ASSEMBLY

3A

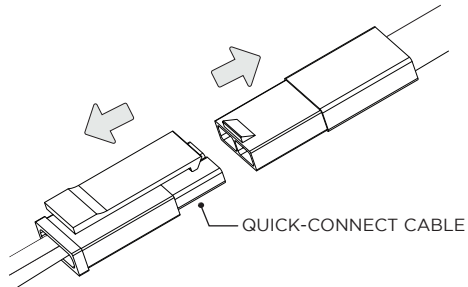


DISCONNECT QUICK-CONNECT CABLE FROM LED BOARDS

4

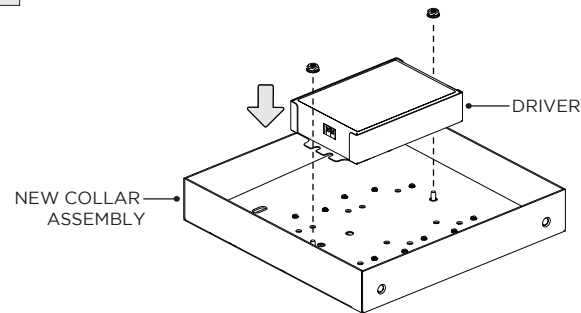

REPLACE COLLAR ASSEMBLY AND REATTACH DRIVER

4A

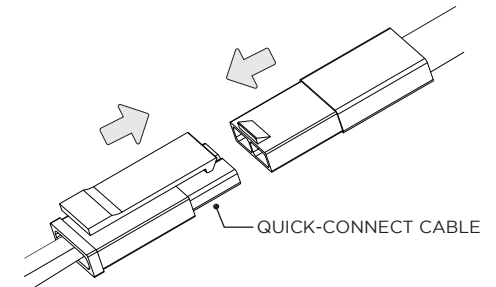

CONNECT QUICK-CONNECT CABLE TO NEW LED BOARDS AND REASSEMBLE FIXTURE