


4.5" high performance fixed downlight
Regressed LED source for enhanced glare control
Lumen range up to 3000lm
2 SDCM, Citizen LED source available in 30K and 35K (80+ CRI)
Universal voltage, 0-10V driver with 100-1% dimming range
Shallow housing available along with other housing options

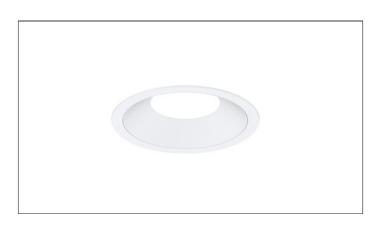

10 DAY QUICKSHIP
Max Order Size: 50 pcs

ORDERING INFORMATION							
PROJECT:							
CATALOG #:		DATE:					
CAT. NO	LUMEN OUTPUT		CRI	COLOR TEMP	BEAM ANGLE		VOLTAGE
3GQ-DL45RF	10 - 1000 LUMENS 15 - 1500 LUMENS 22 - 2200 LUMENS 30 - 3000 LUMENS		<b>\$80 -</b> 80+ CRI	<b>30K -</b> 3000K <b>35K -</b> 3500K	<b>20D -</b> 20° <b>40D -</b> 40° <b>60D -</b> 60°		<b>UNV -</b> 120/277V
DRIVER		FLANGE TYPE		BEVELED INSERT		HOUSING TYPE	
<b>DIM -</b> 0-10V (STANDARD 100-1%)		WT - WHITE TRIM  XTR - TRIMLESS (MUD-IN DRYWALL)		WI - WHITE		RMD - REMODEL (NON-IC)  NCF - NEW CONSTRUCTION FRAME (NON-IC)  SH - SHALLOW HOUSING <sup>1</sup> (IC RATED & CP RATED)  NC - NEW CONSTRUCTION HOUSING (CP RATED)  IC - NEW CONSTRUCTION IC HOUSING <sup>1</sup>	
OPTIONS							
SF70 - SOFTENING LENS  CP - CHICAGO PLENUM <sup>2</sup> BH - C-CHANNEL BAR HANGERS							

- ${\bf 1} \ \ {\sf IC\ rated\ Shallow\ Housing\ and\ New\ Construction\ IC\ housing\ available\ up\ to\ 2200lm}$
- ${\bf 2} \ \ {\it Chicago Plenum option available with Shallow Housing (2200 Im max) and New Construction Housing}$

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program DECEMBER 12, 2023







# TRIM HOUSING OPTIONS


### RMD - Remodel (Non-IC)

### 2200lm max






#### NCF - New Construction Frame (Non-IC)





### **SH -** Shallow Housing (IC and Chicago Plenum Rated) (2200lm max)



**NC -** New Construction Housing (Non-IC and CP rated)

IC - New Construction IC Housing (2200lm max)







# TRIMLESS HOUSING OPTIONS

### RMD - Remodel (Non-IC)


### 2200lm max

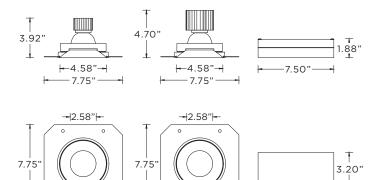

#### NCF - New Construction Frame (Non-IC)



# **SH -** Shallow Housing (IC and Chicago Plenum Rated) (2200lm max)



**NC -** New Construction Housing (Non-IC and CP rated)

-13.80" --9.27" -

IC - New Construction IC Housing (2200lm max)

