




3G-2RLI-WC, and 3G-4RLI-WC
2", and 3.5" RECESSED LINIA WALL TO CEILING
TRIM/FLANGELESS

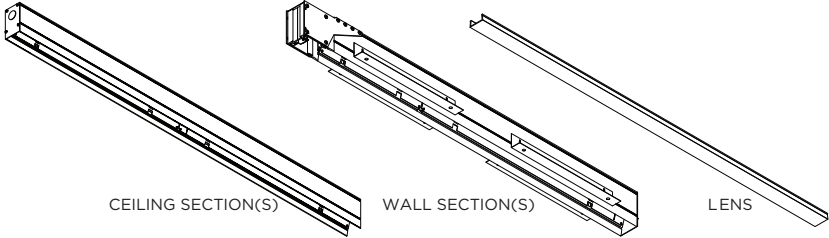

⚠ FOR **NEW CONSTRUCTION** INSTALLATION ONLY
❗ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

FIXTURE TYPES		INCLUDED COMPONENTS
2RLI PROFILE	4RLI PROFILE	


INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
❗ ATTENTION	
⚡ POWER ON	
⏻ POWER OFF	

OVERVIEW

3G-2RLI ,4RLI - FLANGELESS - FX




FLANGELESS - FX

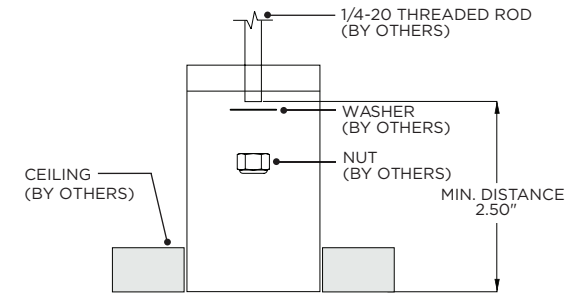


FLANGELESS - FX - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-2RLI	2.063"	LENGTH + 0.125"
3G-4RLI	3.490"	LENGTH + 0.125"

3G-2RLI ,4RLI - WHITE TRIM FLANGE -WT

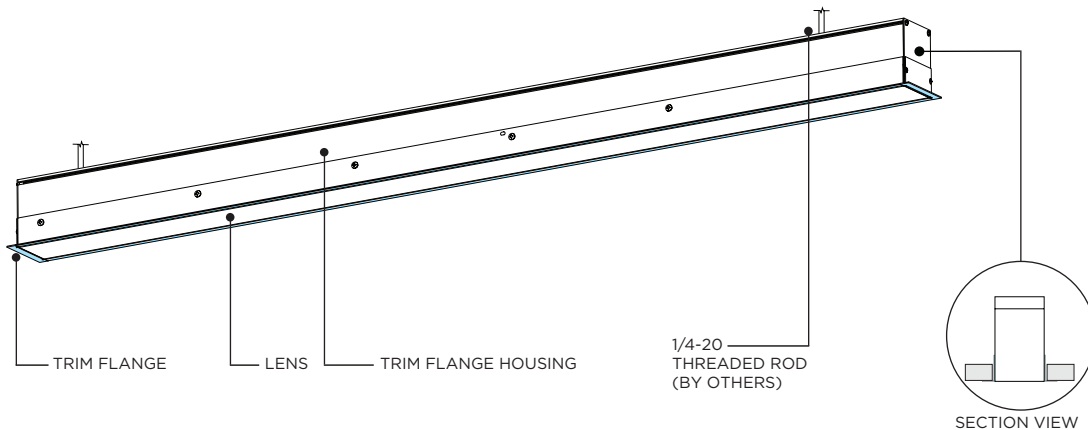

WHITE TRIM FLANGE -WT

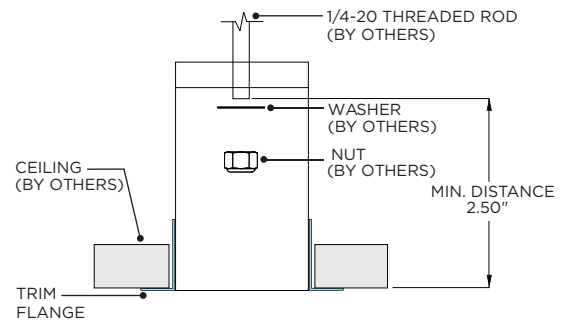


WHITE TRIM FLANGE - WT - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-2RLI	2.300"	LENGTH + 0.380"
3G-4RLI	3.750"	LENGTH + 0.380"

OVERVIEW


WT/FX - WALL SECTION

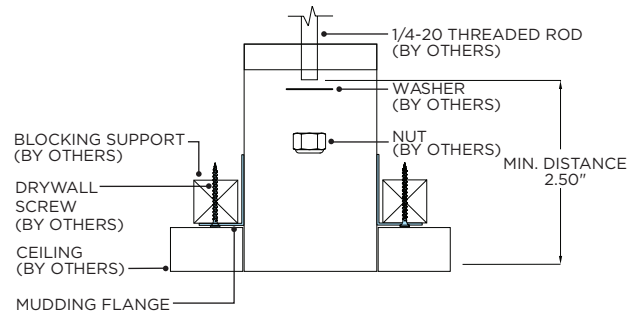


FLANGELESS - FX - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-2RLI	2.063"	LENGTH + 0.125"
3G-4RLI	3.490"	LENGTH + 0.125"

POWER FEED - WALL/CEILING

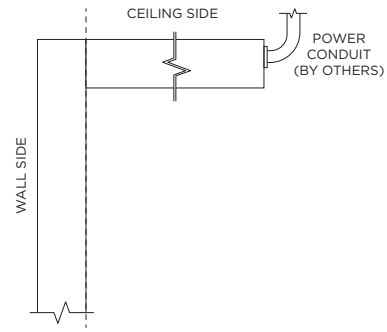


POWER FEED - WALL/CEILING/WALL

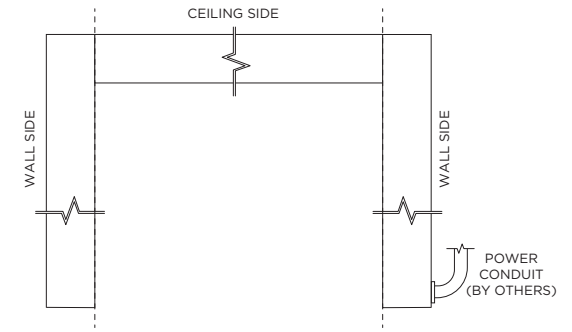


ASYMMETRIC LENS ORIENTATION

3G-2RLI-ASYMMETRIC LENS


ROOM SIDE DISTRIBUTION

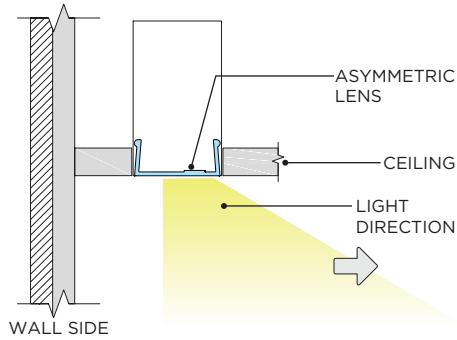


ASYMMETRIC LENS



WALL GRAZING DISTRIBUTION

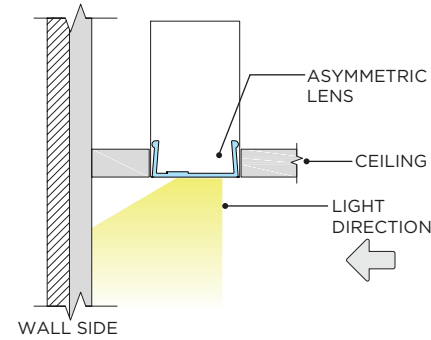


ASYMMETRIC LENS




3G-4RI-ASYMMETRIC LENS/REFLECTOR ORIENTATION


ROOM SIDE DISTRIBUTION

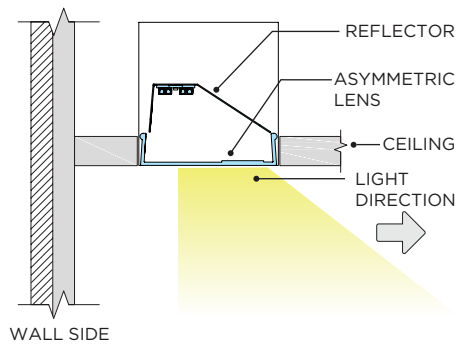


ASYMMETRIC LENS




WALL GRAZING DISTRIBUTION

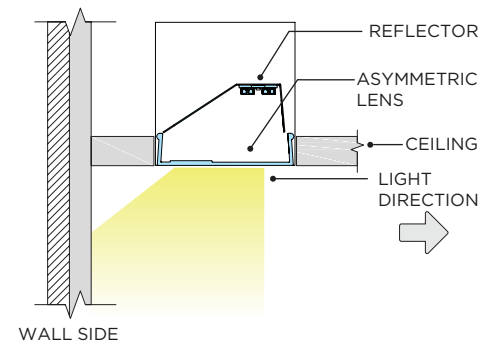

ASYMMETRIC LENS



THREADED ROD LOCATION

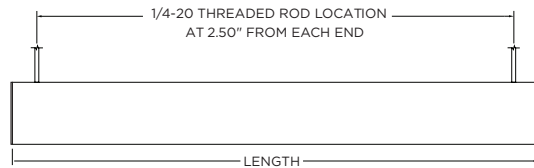

THREADED ROD LOCATION

3'	31"	6'	67"
4'	43"	7'	79"
5'	55"	8'	91"

IDENTIFICATION AND PREPARATION

ID LABEL




ORDER TYPE ORDER NUMBER SECTION ID NUMBER

i IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS

ID LABEL










SECTION: **01 OF 03**
TYPE: **XX XX** CO-0000




STARTER

JOINER


ENDER

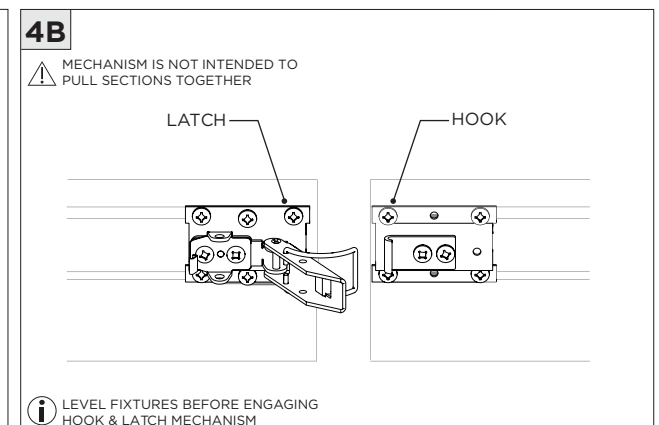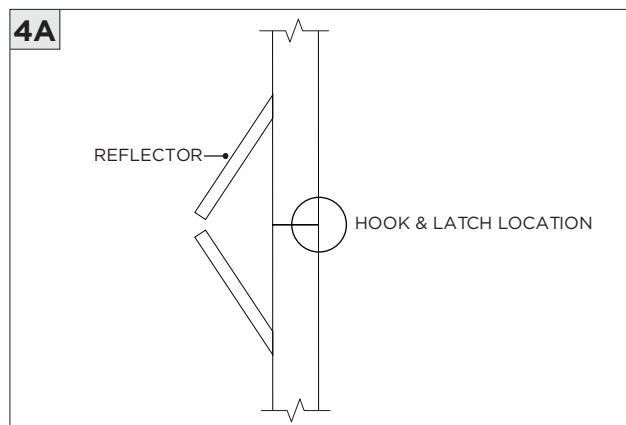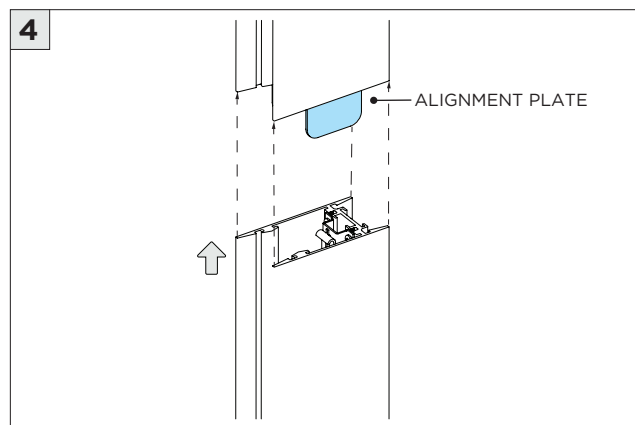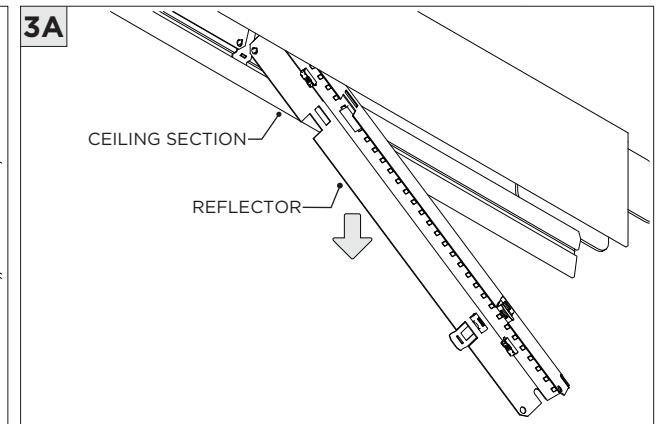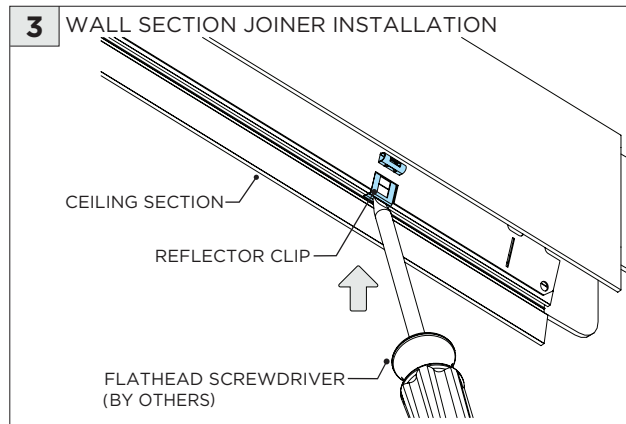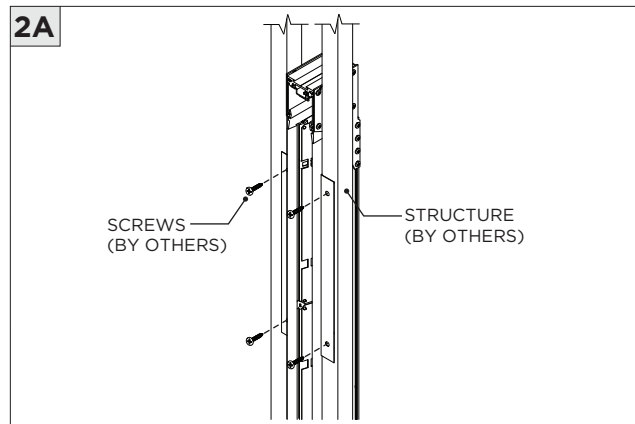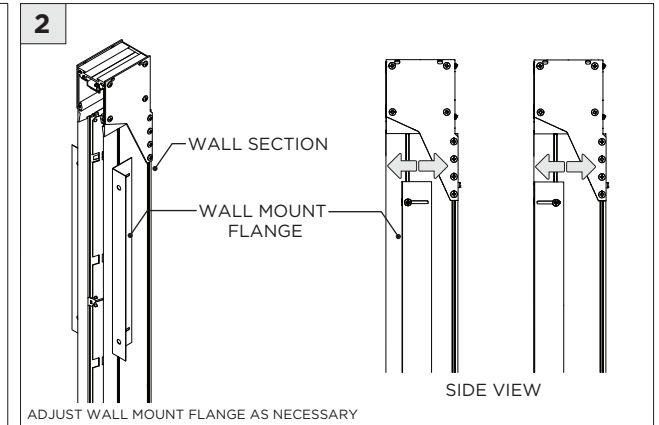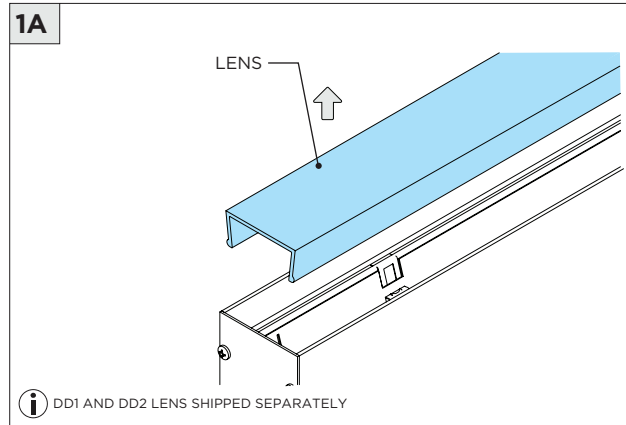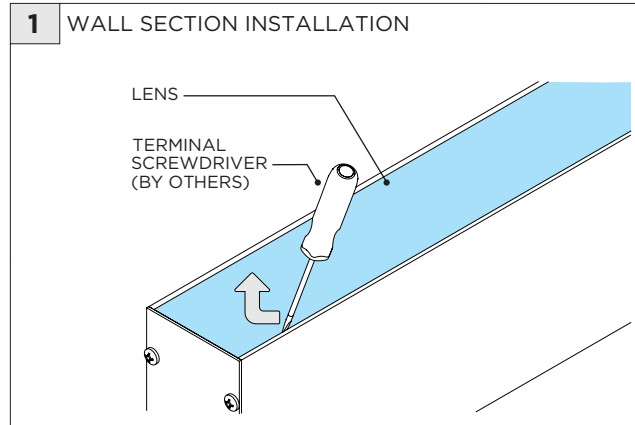


4C

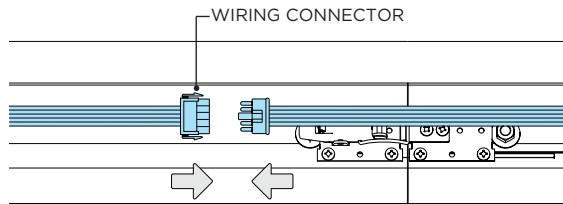

5

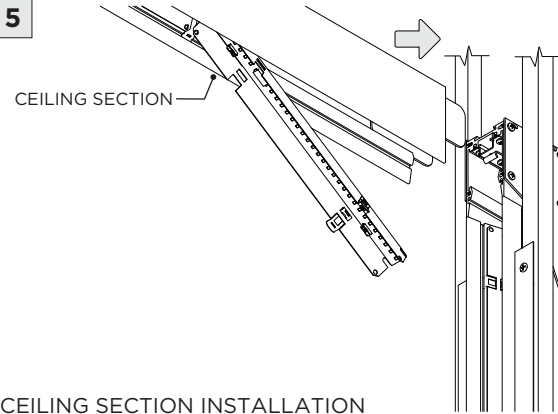


6

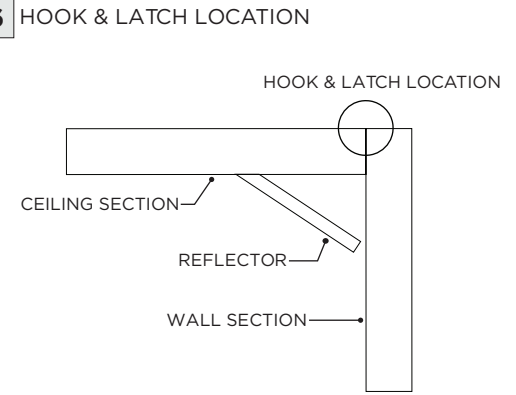


6A

⚠ MECHANISM IS NOT INTENDED TO PULL SECTIONS TOGETHER

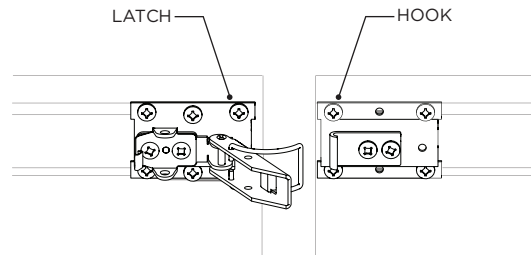


i LEVEL FIXTURES BEFORE ENGAGING HOOK & LATCH MECHANISM

7

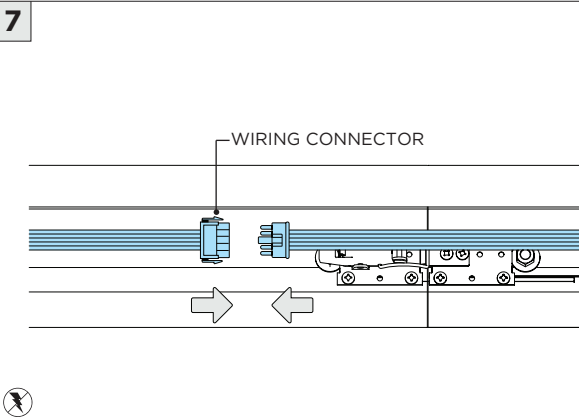


8

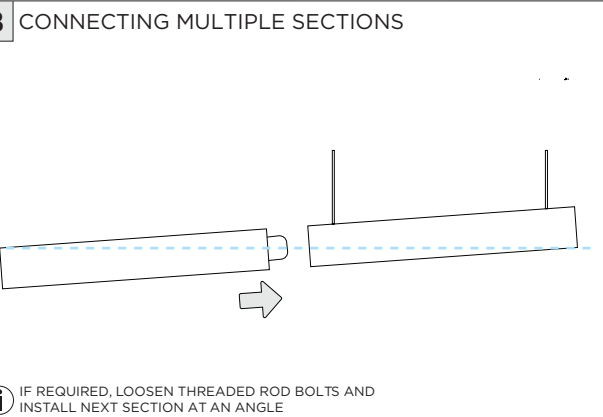


i IF REQUIRED, LOOSEN THREADED ROD BOLTS AND INSTALL NEXT SECTION AT AN ANGLE

8A

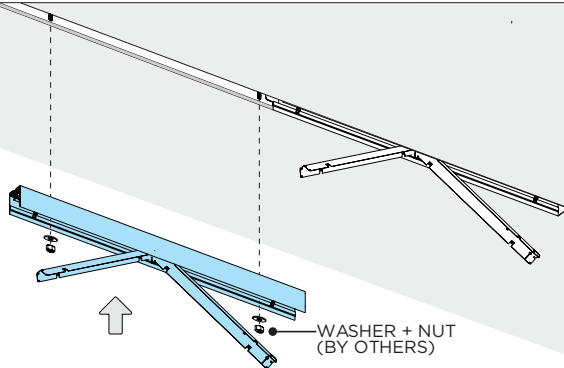





REPEAT STEPS 6A & 7 FOR ALL SECTIONS

9

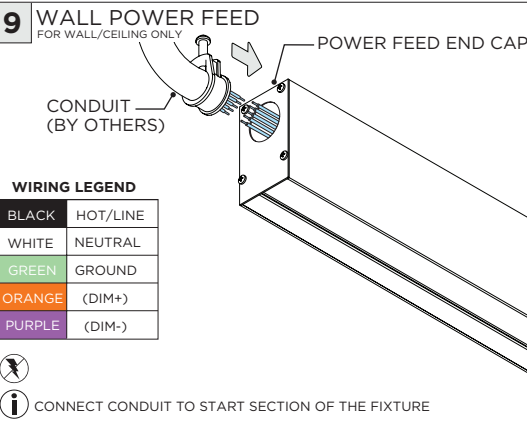


10

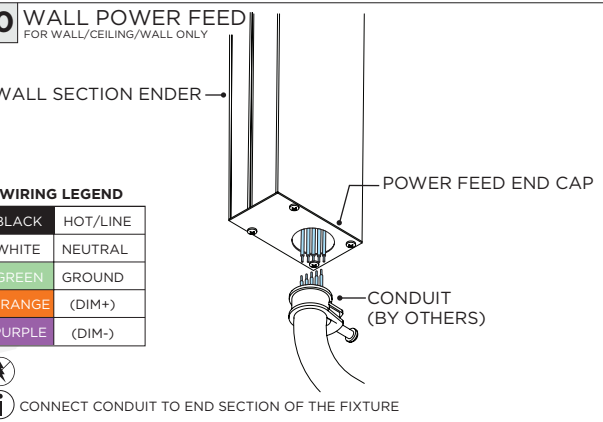

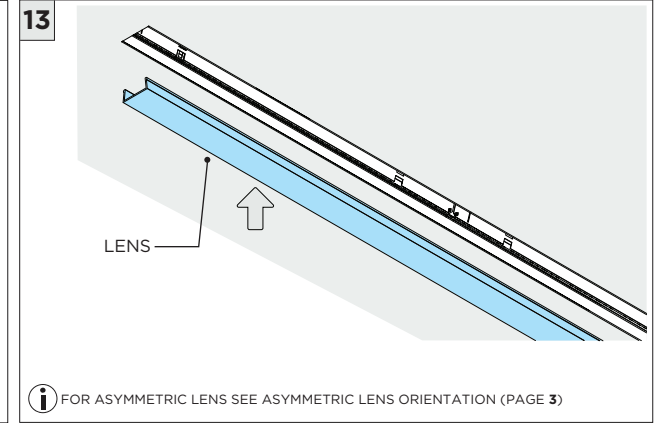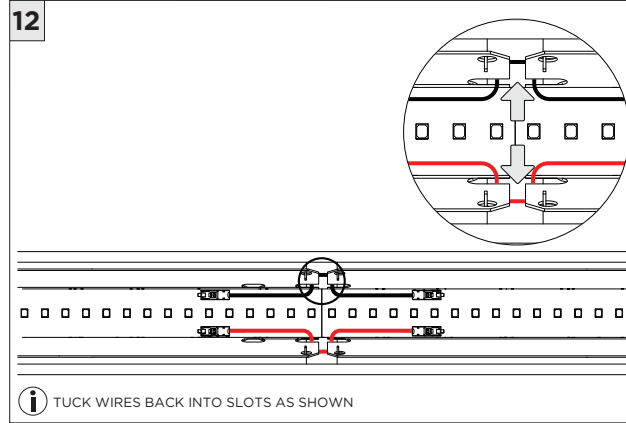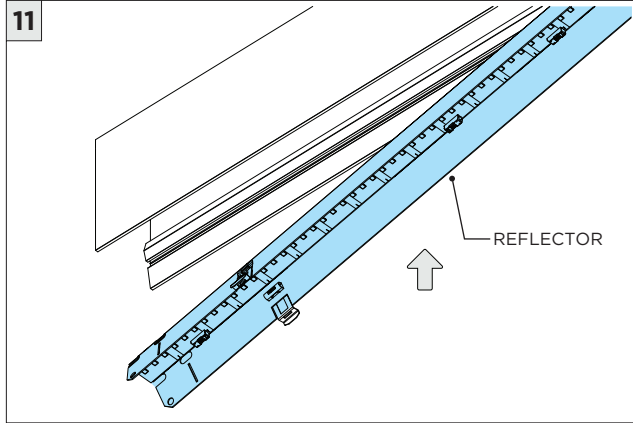


DRIVER SERVICING


1 FLUSH LENS REMOVAL

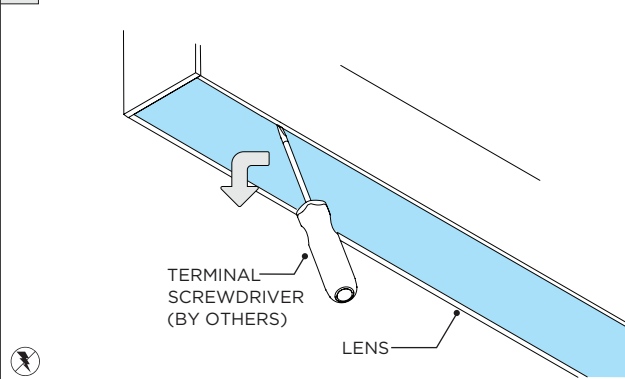


2

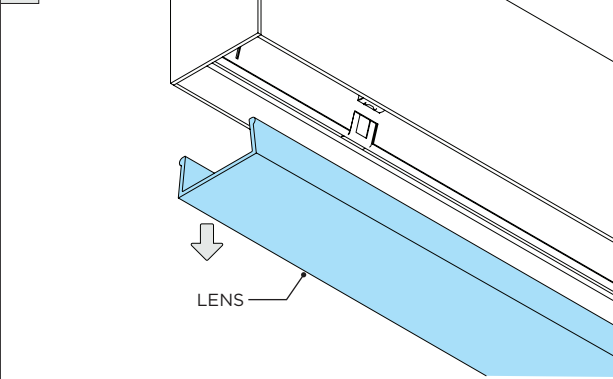


2A DROP LENS REMOVAL

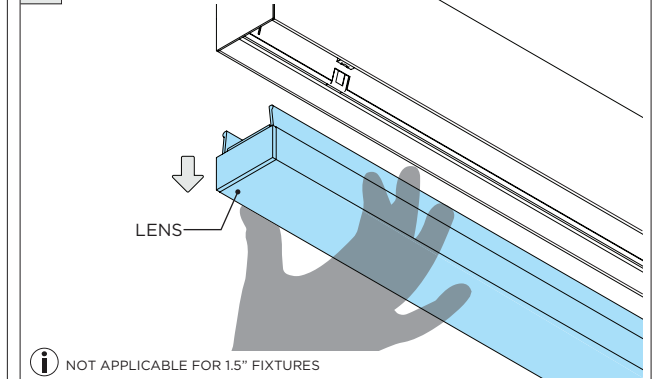


3

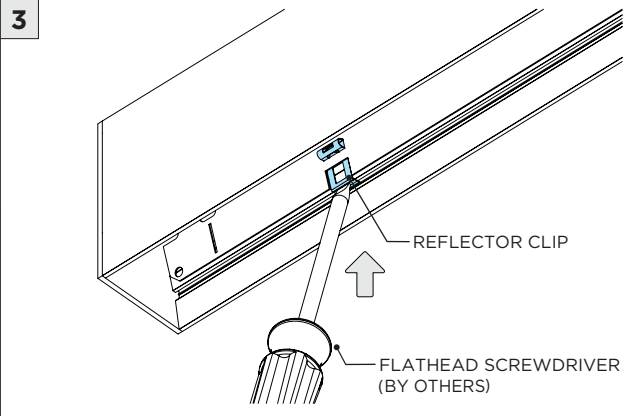


4

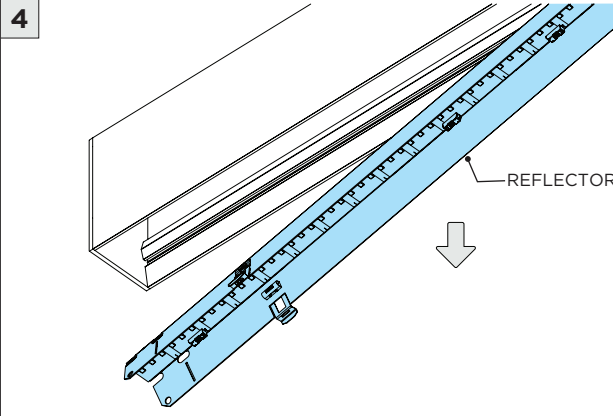


5

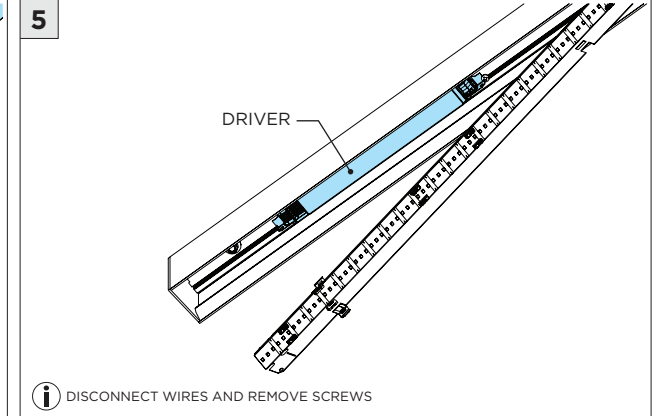


6

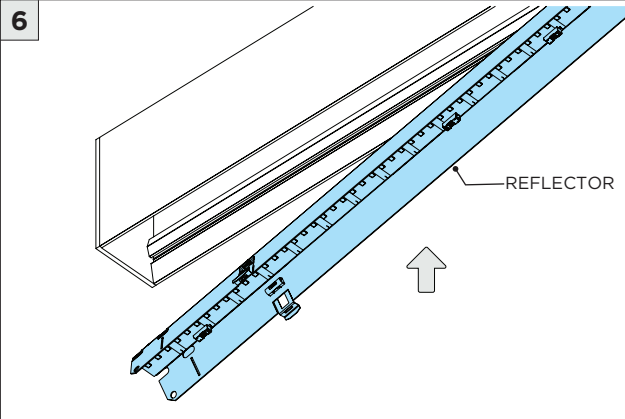










7

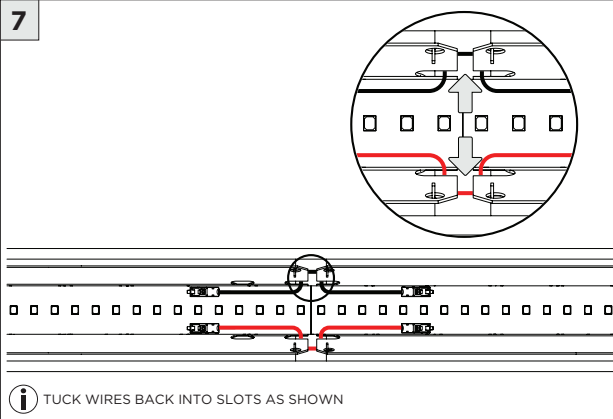

8

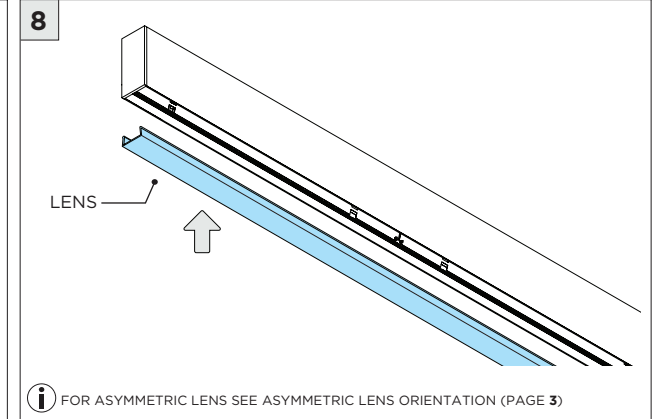


LED SERVICING

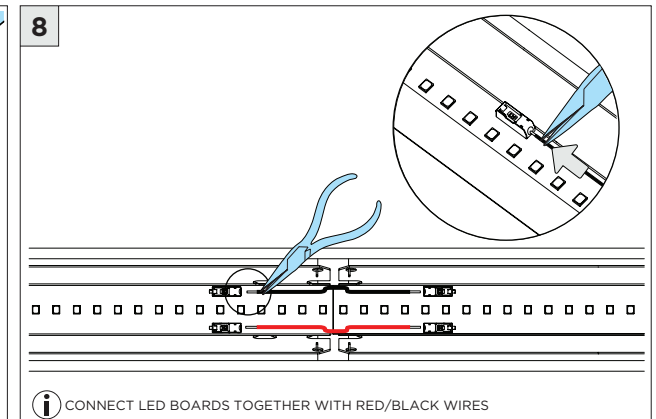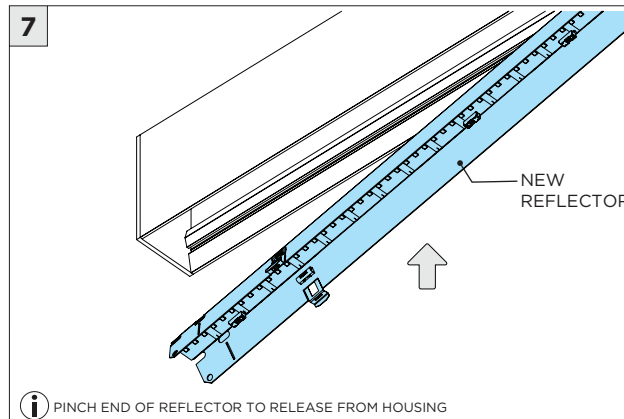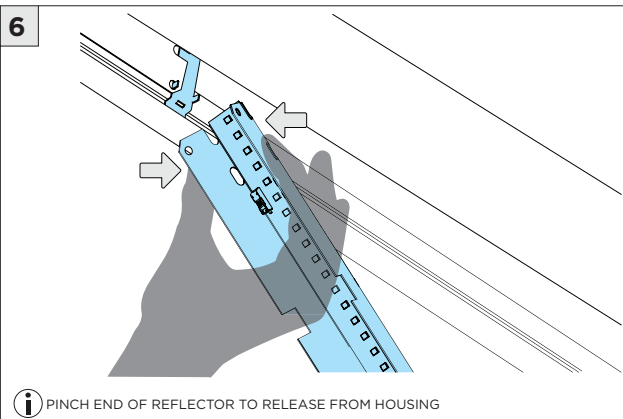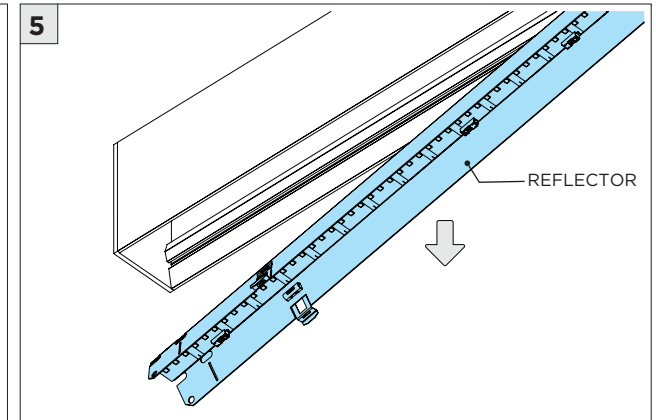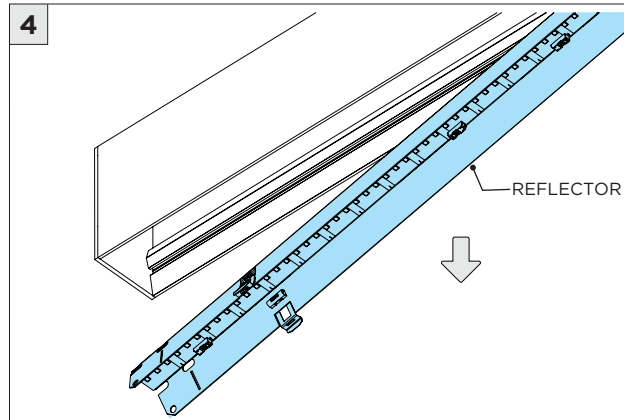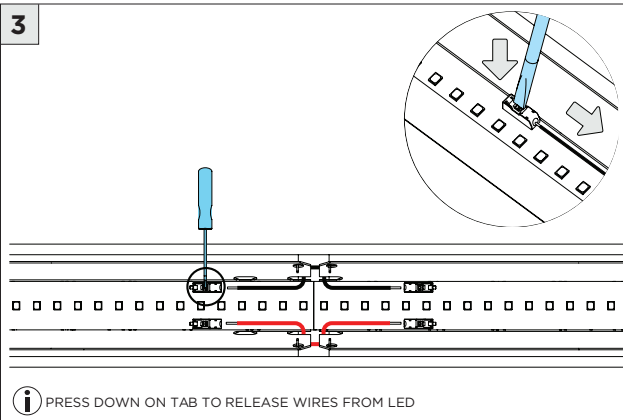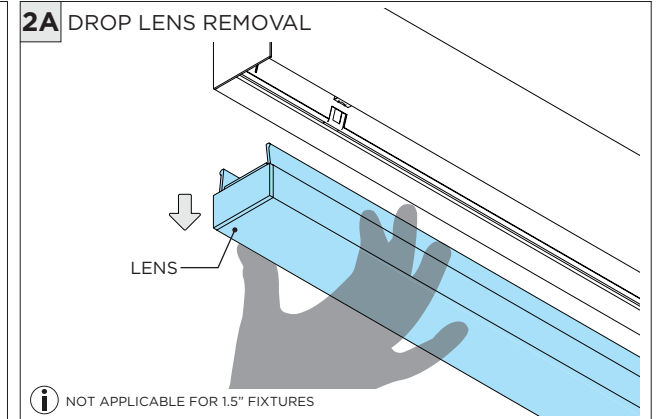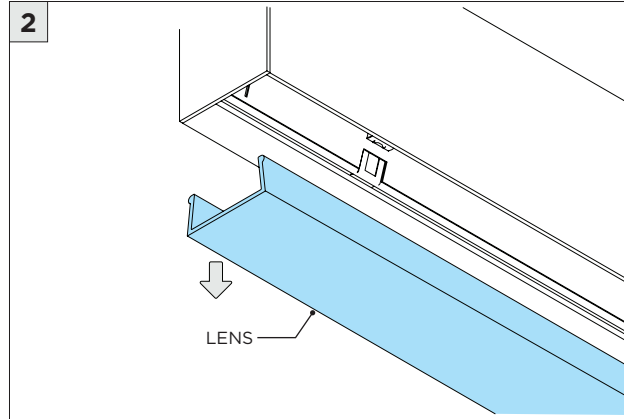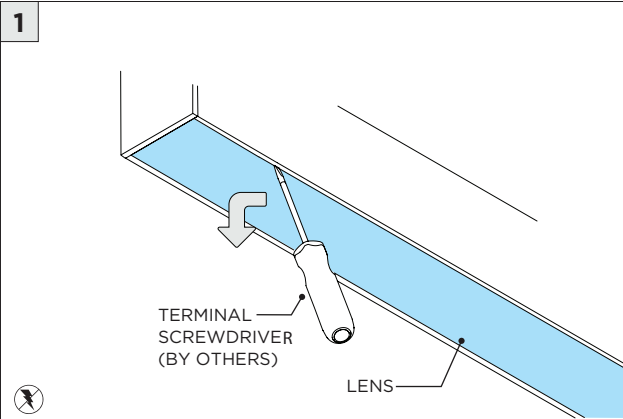

LED SERVICING

9

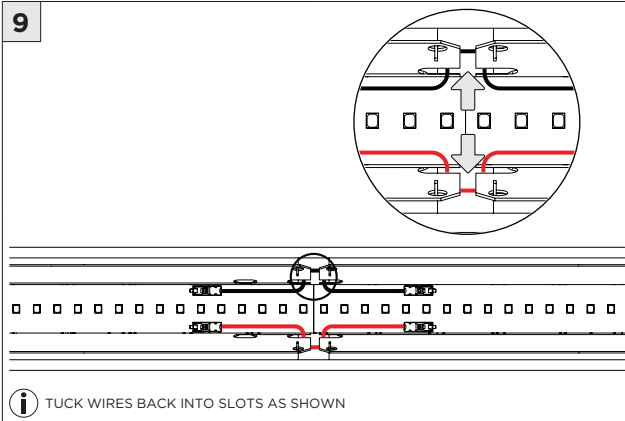

10

