


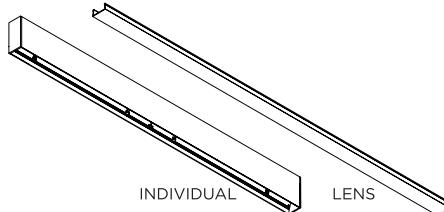



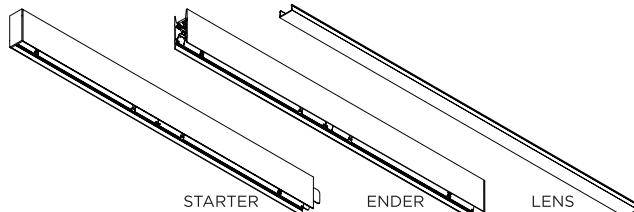








3G-2SLI and 3G-4SLI 2", and 3.5" SURFACE LINIA

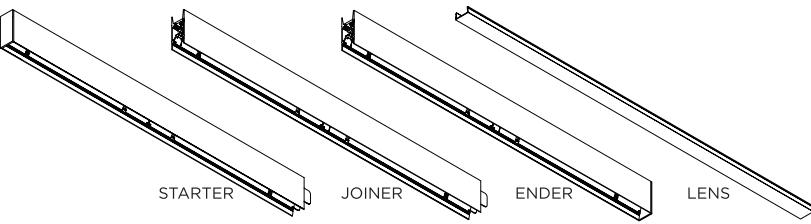


 **FOR NEW CONSTRUCTION INSTALLATION ONLY**

Fixture Types	Included Components
2SLI PROFILE 	Standalone Fixtures (2' to 8') 
4SLI PROFILE 	Continuous Runs (9' to 16') 
Continuous Runs (17' and longer) 	


Instruction Key	Information
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
 ATTENTION	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
 POWER ON	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
 POWER OFF	TURN OFF POWER DURING INSTALLATION OR SERVICING

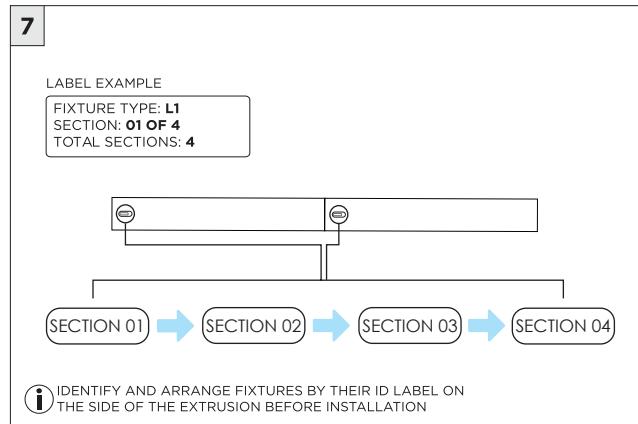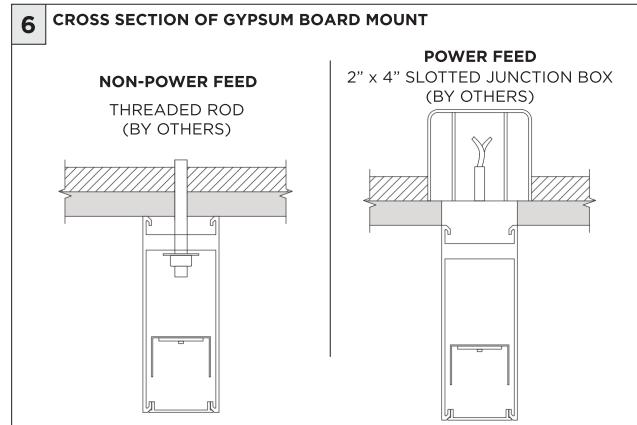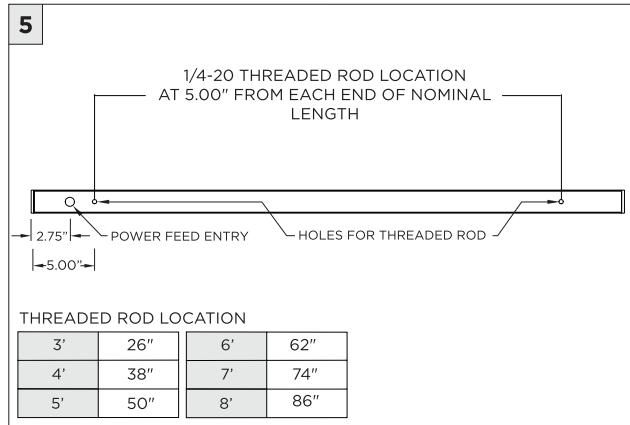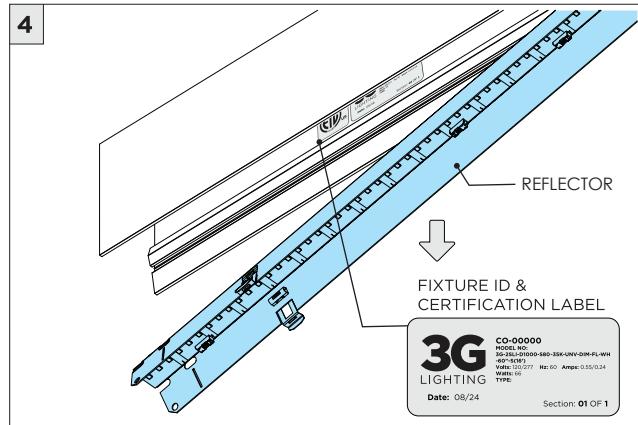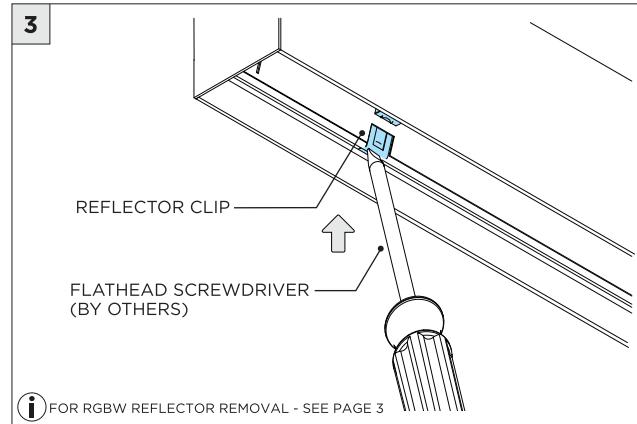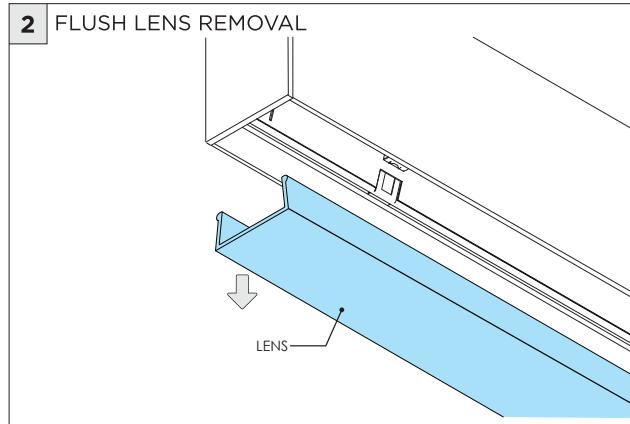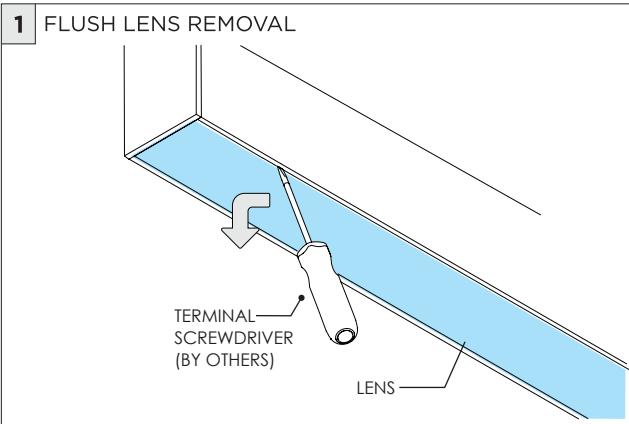

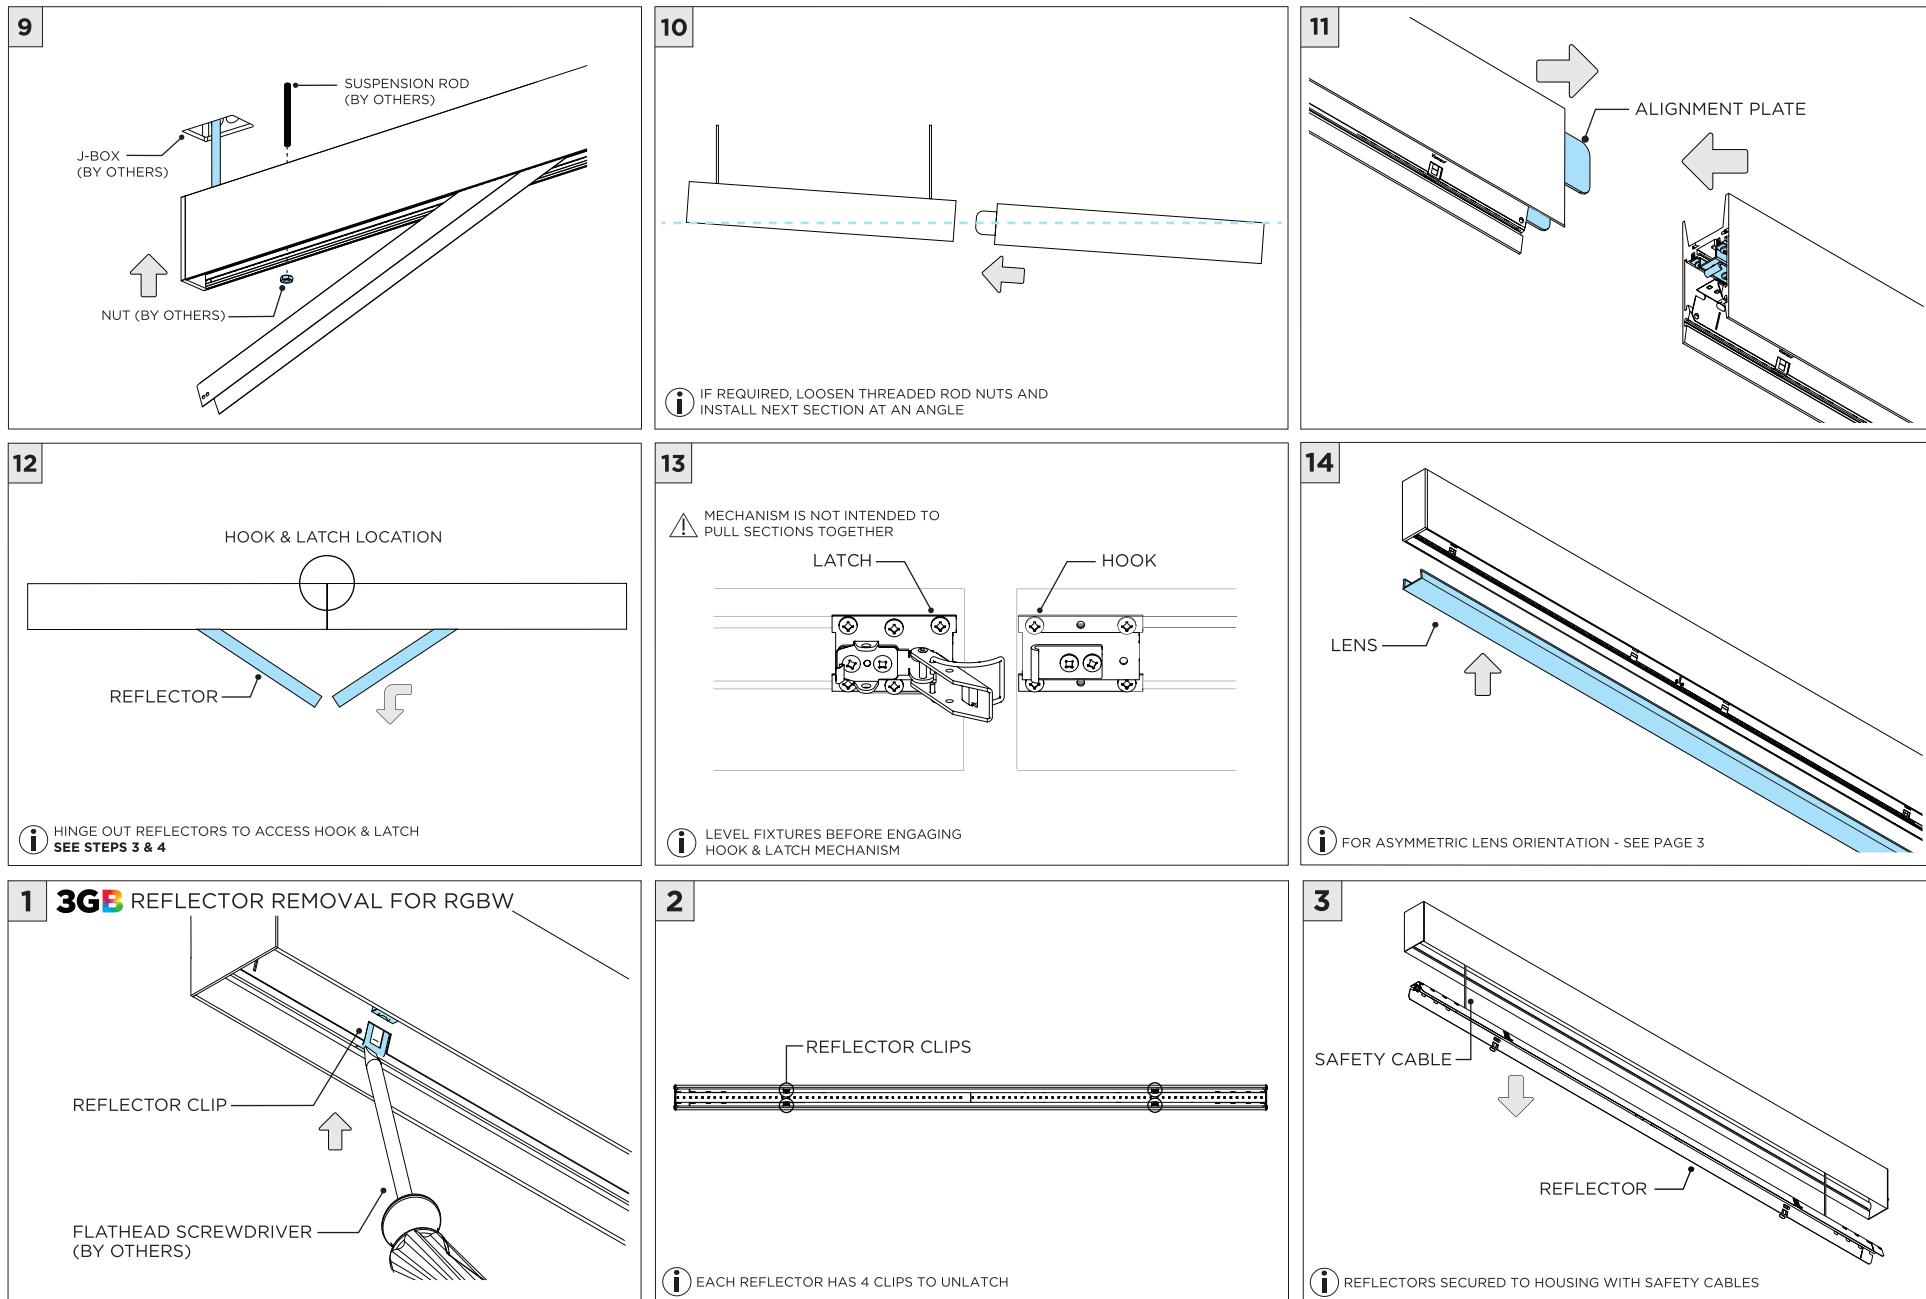


DRIVER SERVICING

1 FLUSH LENS REMOVAL

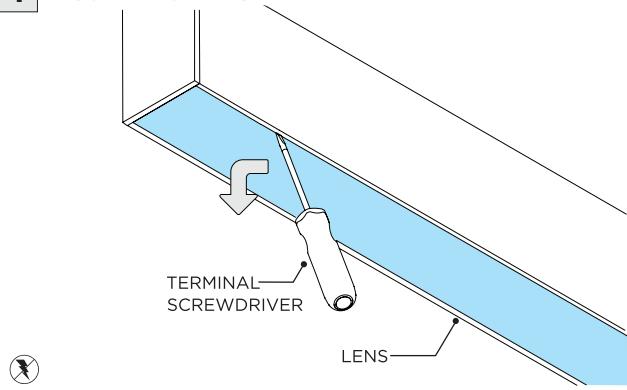


1

2

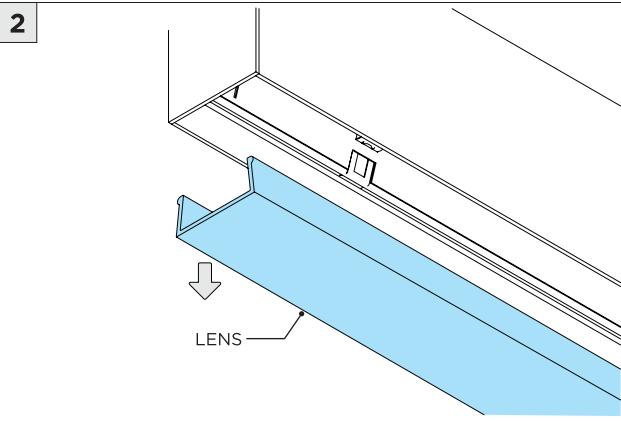


2A DROP LENS REMOVAL

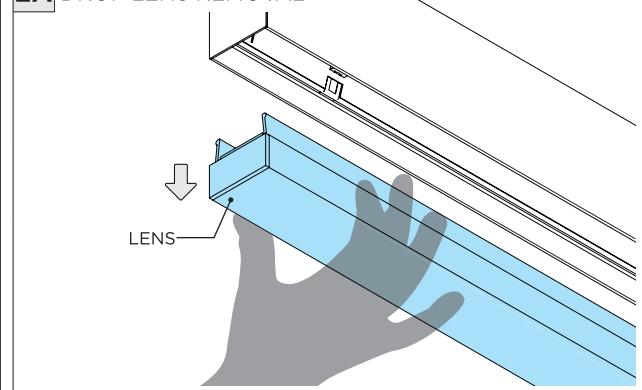


3

4

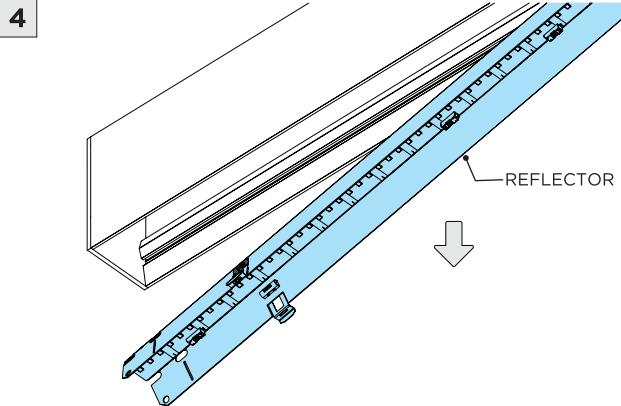


FOR RGBW REFLECTOR REMOVAL - SEE PAGE 5

5

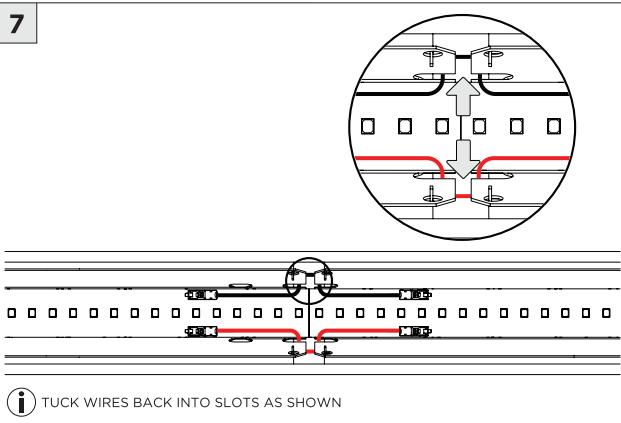


6




8

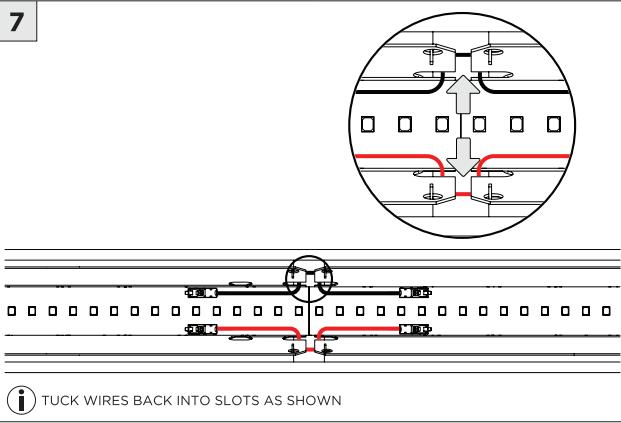

8

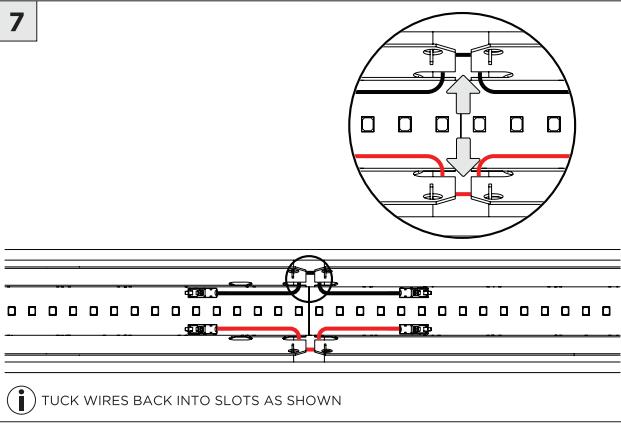


DRIVER SERVICING

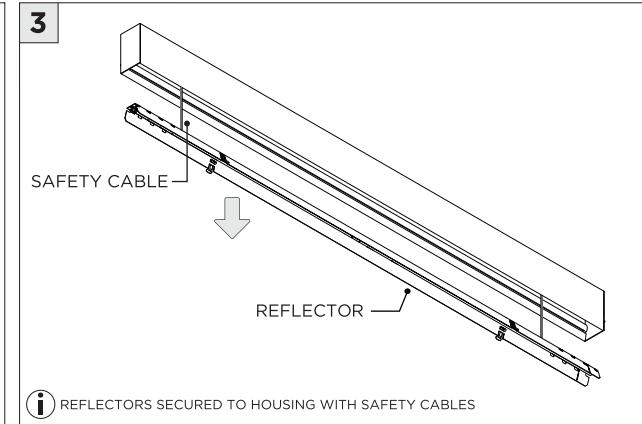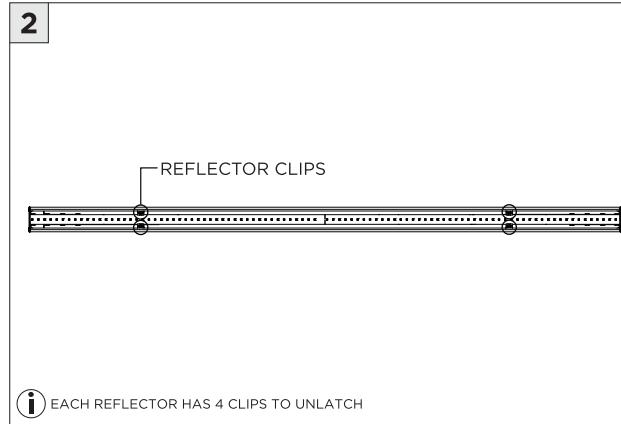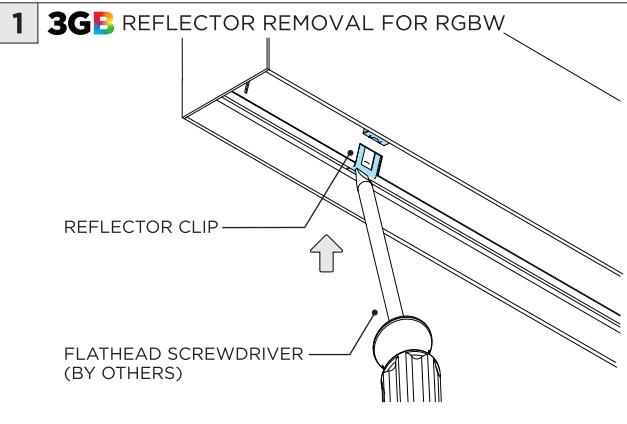


LED SERVICING

1 FLUSH LENS REMOVAL

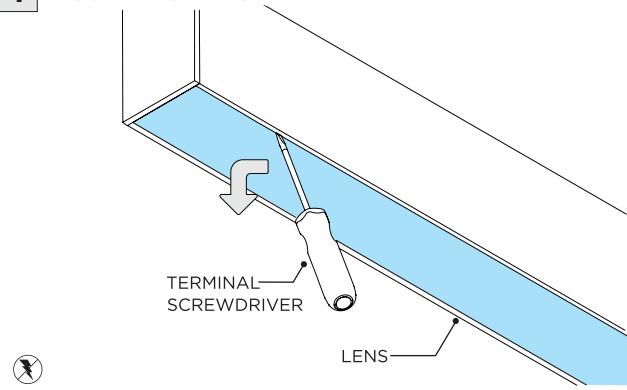


1

2

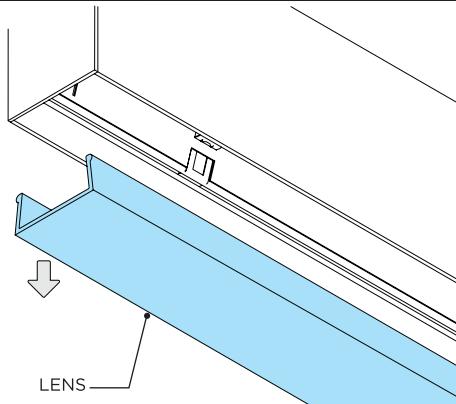


2A DROP LENS REMOVAL

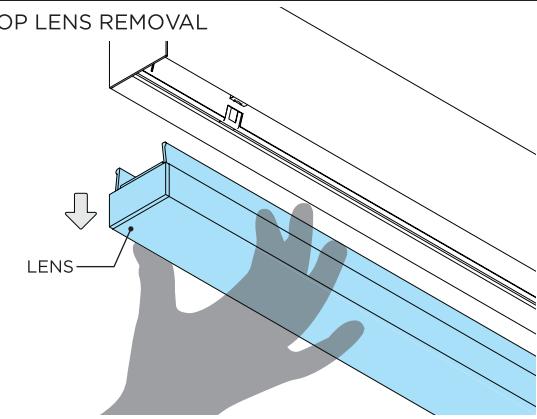


3

4

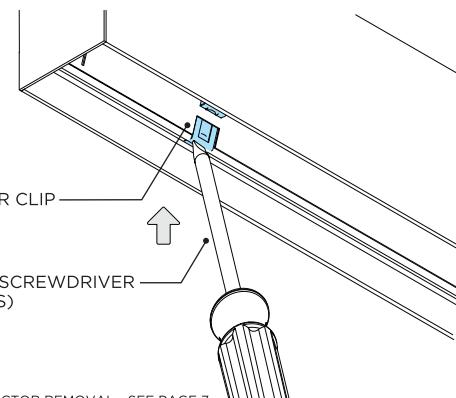


5

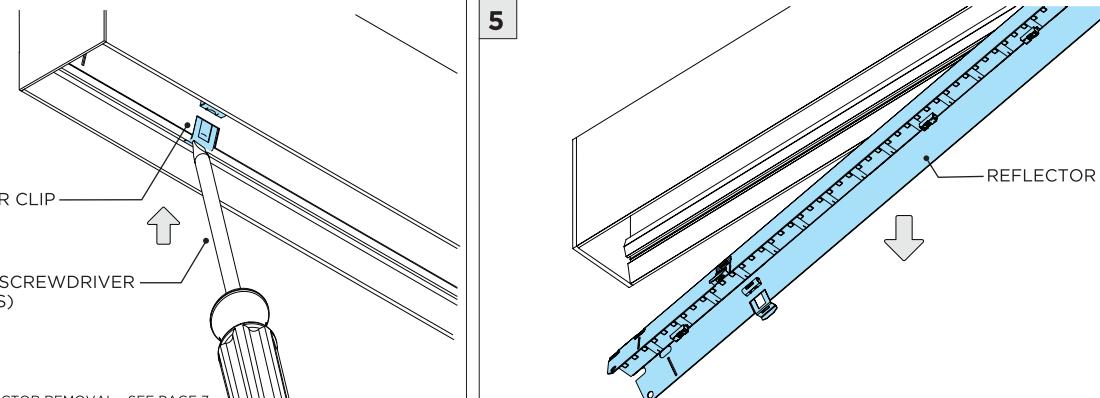

6

7

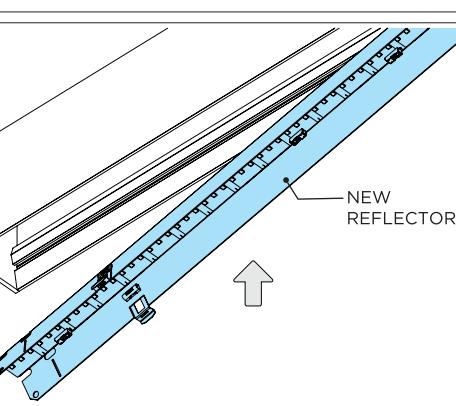

8

1 PINCH END OF REFLECTOR TO RELEASE FROM HOUSING

1 CONNECT LED BOARDS TOGETHER WITH RED/BLACK WIRES

LED SERVICING

