

3G LIGHTING

3G-1PLI-D

1.5" LINEAR PENDANT
DIRECT



Narrow 1.5" aperture with one piece extruded aluminum housing
Individual or continuous runs available in multiple run configurations
Direct distribution with multiple lumen output options
LED system with performance up to 111 lumens per watt
Extruded acrylic lens with optimal performance and glare control
Asymmetric optics available
1% dimming standard with several driver options

PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	VOLTAGE
3G-1PLI-D	D250 - 250 LM/FT ¹ D500 - 500 LM/FT D750 - 750 LM/FT D1000 - 1000 LM/FT ² DC__ - CUSTOM OUTPUT (SPECIFY LM/FT) * <small>*Specify custom lumen outputs in 50lm increments (ie: DC600, DC650, DC700) Custom output cannot exceed D1000</small>	S80 - 80+ CRI ³ H90 - 90+ CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	UNV - 120/277V 347 - 347V

DRIVER	LENS OPTION	FINISH	CABLE LENGTH
DIM - 0-10V (100-1%) DO1 - 0-10V (100-0.1%) DALI - DALI (100-1%) ⁴ DHL2 - LUTRON HI-LUME (1% ECOSYSTEM) DMX - DMX (100-0%)	FL - FLUSH LENS DASY - ASYMMETRIC LENS	WH - WHITE BK - BLACK SV - SILVER <small>All mounting canopies provided in white as standard</small>	60 - 60" 120 - 120"



OPTIONS	RUN TYPE
EMB - EMERGENCY BATTERY * (INTEGRAL) EMC - EMERGENCY CIRCUIT MC2 - MULTIPLE CIRCUITS (2 ZONES) MC3 - MULTIPLE CIRCUITS (3 ZONES) <small>*Minimum 4' section</small>	S - ___' (STRAIGHT) * L - ___'X ___' (L-SHAPE) U - ___'X ___'X ___' (U-SHAPE) R - ___'X ___' (RECTANGLE/SQUARE) T - ___'X ___' (T-SHAPE) X - ___'X ___' (X-SHAPE) CUS - ___ (CUSTOM LAYOUT - PROVIDE DRAWING) <small>*Individual units available from 2' to 8' Continuous runs available in 1" increments as standard</small>

1 D250 (250LM/FT) not available in 2' length with DALI, DO1, DMX, or DHL2. Specify minimum DC350 for those driver options
 2 D1000 (1000LM/FT) not available with H90 (90+ CRI)
 3 S80 (80+ CRI) not available with 27K and 40K
 4 DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options

BASED ON 4' LENGTH (80+ CRI AND 3500K SOURCE)

LENS OPTION	DELIVERED LUMENS (LM/FT)	SYSTEM WATTS (W/FT)	EFFICACY (LPW)
FLUSH	250	2.3	110
	500	4.5	111
	750	7.2	105
	1000	9.9	101
ASYMMETRIC	250	2.3	106
	500	4.5	105
	750	7.2	102
	1000	9.9	102

LUMEN OUTPUT MULTIPLIER: 27K=0.94, 30K=0.97, 35K=1.00, 40K=1.01, 90CRI=0.88

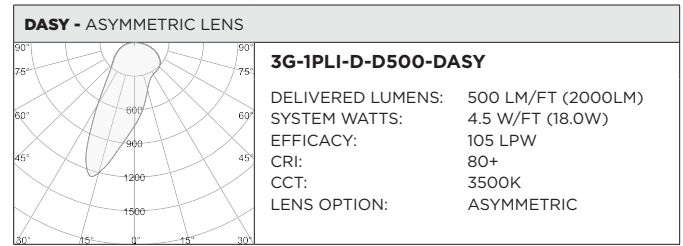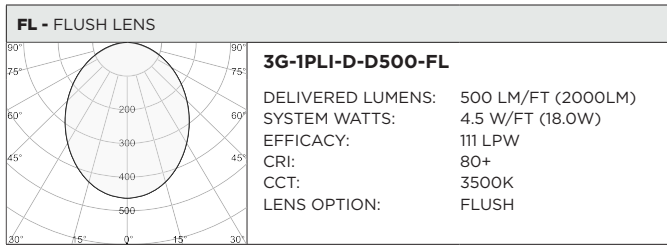

HOUSING

Extruded aluminum housing with narrow 1.5" aperture
 Die cast aluminum end caps add 1/4" to each end of luminaire
 Individual units and continuous runs available in 1" increments as standard
 24-gauge LED reflector with high reflectance white powder coated finish
 Standard polyester powder coated matte white finish. Optional finishes available

OPTICS

Extruded, satin acrylic lens designed for optimal LPW performance and glare control. Up to 8' continuous
 High performance asymmetric optics available

LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 NO.250.0. Rated for indoor dry or damp locations

WARRANTY

5 Year Warranty on LED and drivers
 Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
 Ambient temperature at fixture should not exceed 25°C

ELECTRICAL


Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
 Standard 120/277V universal voltage with several driver options
 Luminaires are pre-wired with factory installed quick connects and branch circuit wiring
 All drivers are integral and easily accessible through luminaire aperture
 Minimum 4' and maximum 6' length for each integral emergency battery. 10W output for 90 minutes

LED SYSTEM

Proprietary LED system with color consistency <3 SDCM
 Available in 27K, 30K, 35K, and 40K
 Standard 80+CRI. Optional 90+CRI
 R9 value of 56 for 90+CRI
 L90 >60,000 hours
 5 Year Warranty

MOUNTING



Toolless installation with 3G's proprietary mounting system
 Internal, toolless joiner system (latch and hook) easily connects multiple sections together
 LED reflectors remain within each fixture section during installation with 3G's click and lock spring system
 Adjustable aircraft cable suspension with locking fasteners (60" length standard)
 Standard, 18-gauge, 5 conductor single circuit power feed (clear braided finish)
 All mounting canopies provided in white finish as standard
 Suitable for various architectural ceilings (see mounting details)
 Fixture weight: +/- 2.5 lb/ft

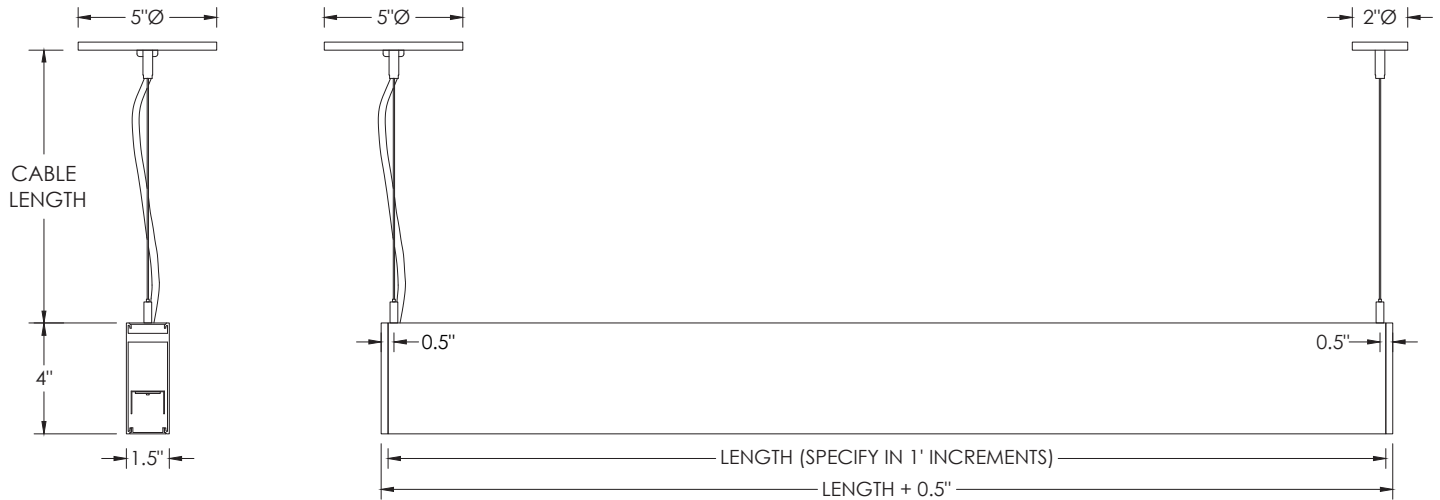

LENS OPTION


FL - FLUSH

DASY - ASYMMETRIC




PATTERNS

Specify pattern shape and overall dimensions as shown below
 Patterns are connected with fully illuminated 12"x12" L, T, and X-shaped sections
 Please consult factory for custom patterns and shapes not shown below



L-SHAPE	U-SHAPE	RECTANGLE/SQUARE	T-SHAPE	X-SHAPE
Provide dimensions of AxB Example: L - 6'x8'	Provide dimensions of AxBxC Example: U - 8'x10'x6"	Provide dimensions of AxB Example: R - 10'x8'	Provide dimensions of AxB Example: T - 14'x6'	Provide dimensions of AxB Example: X - 14'x14'

TYPICAL SECTION MOUNTING

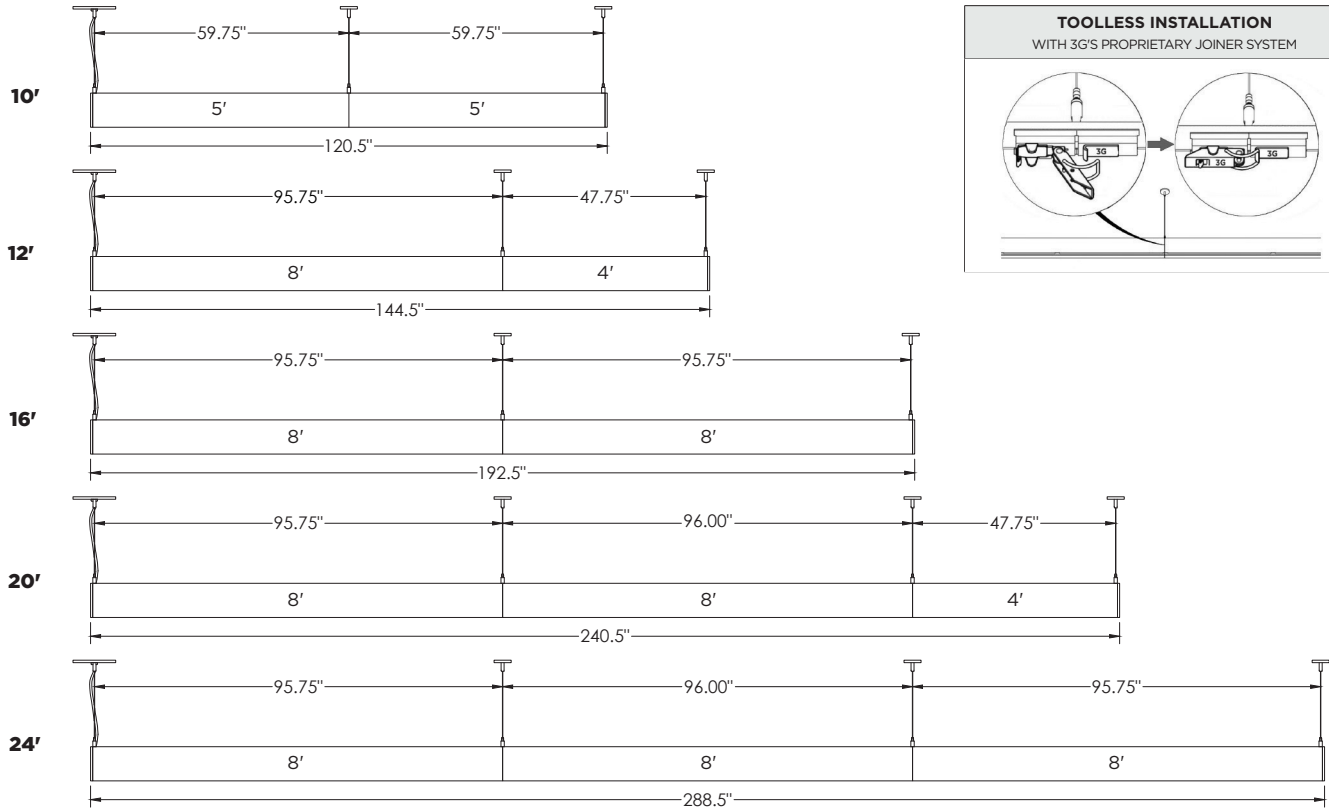

NOTE:
Run lengths and configurations not shown are available in 1" increments as standard

MOUNTING DETAILS

