



3G-1RLI
1.5" RECESSED LINIA
TRIMLESS FLANGE




⚠ FOR **NEW CONSTRUCTION** INSTALLATION ONLY

FIXTURE TYPES	INCLUDED COMPONENTS
<p>1RLI PROFILE</p>	<p>Standalone Fixtures (2' to 8')</p> <p>INDIVIDUAL L ENS</p>
<p>Continuous Runs (9' to 16')</p> <p>STARTERL ENDER ENS</p>	<p>Continuous Runs (17' and longer)</p> <p>STARTER JOINER ENDER LENS</p>


INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
i ATTENTION	
⚡ POWER ON	
⏻ POWER OFF	

OVERVIEW

3G-1RLI - TRIMLESS - XTR

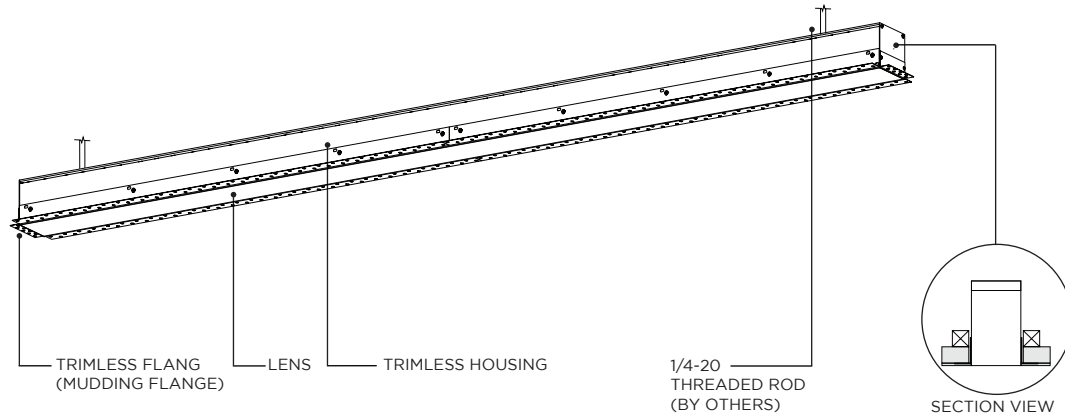


TRIMLESS - XTR

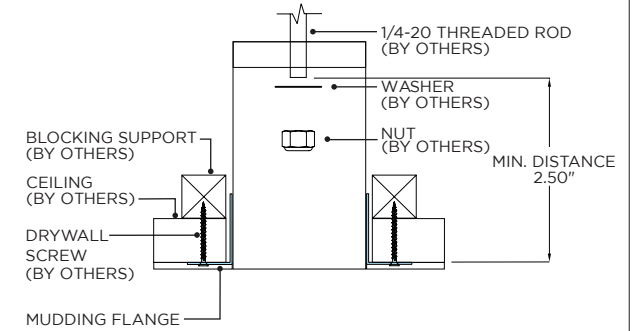

TRIMLESS - XTR - CEILING CUT-OUT DIMENSIONS





FIXTURE TYPE	WIDTH	LENGTH
3G-1RLI	2.250"	LENGTH + 0.500"









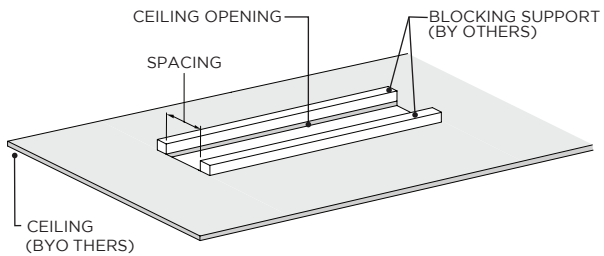










BLOCKING SUPPORT SPACING

FIXTURE TYPE	MIN. DISTANCE	MAX DISTANCE
3G-1RLI	2.25"	2.55"








ASYMMETRIC LENS ORIENTATION

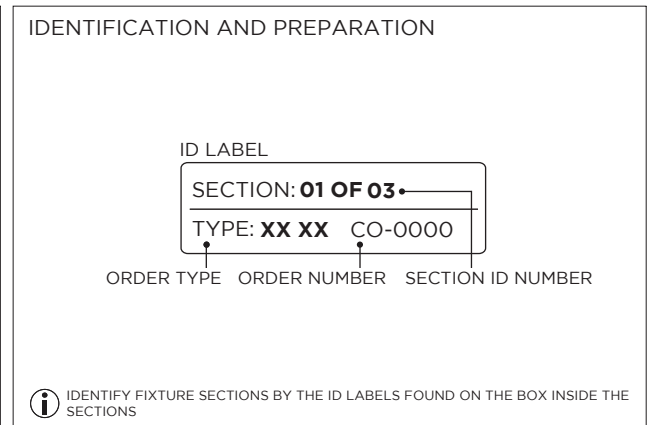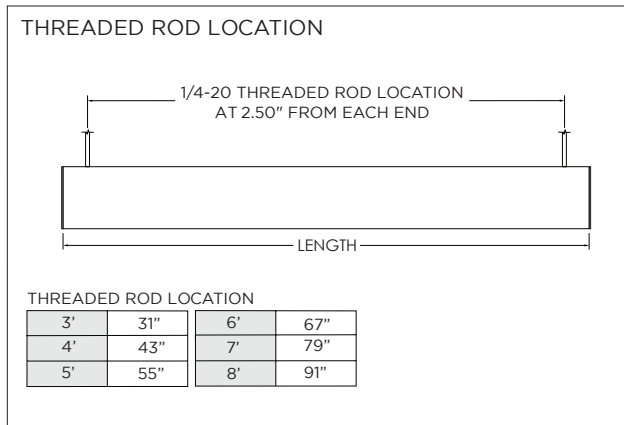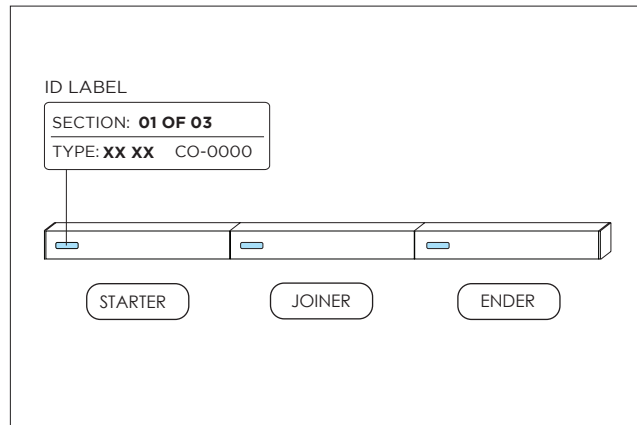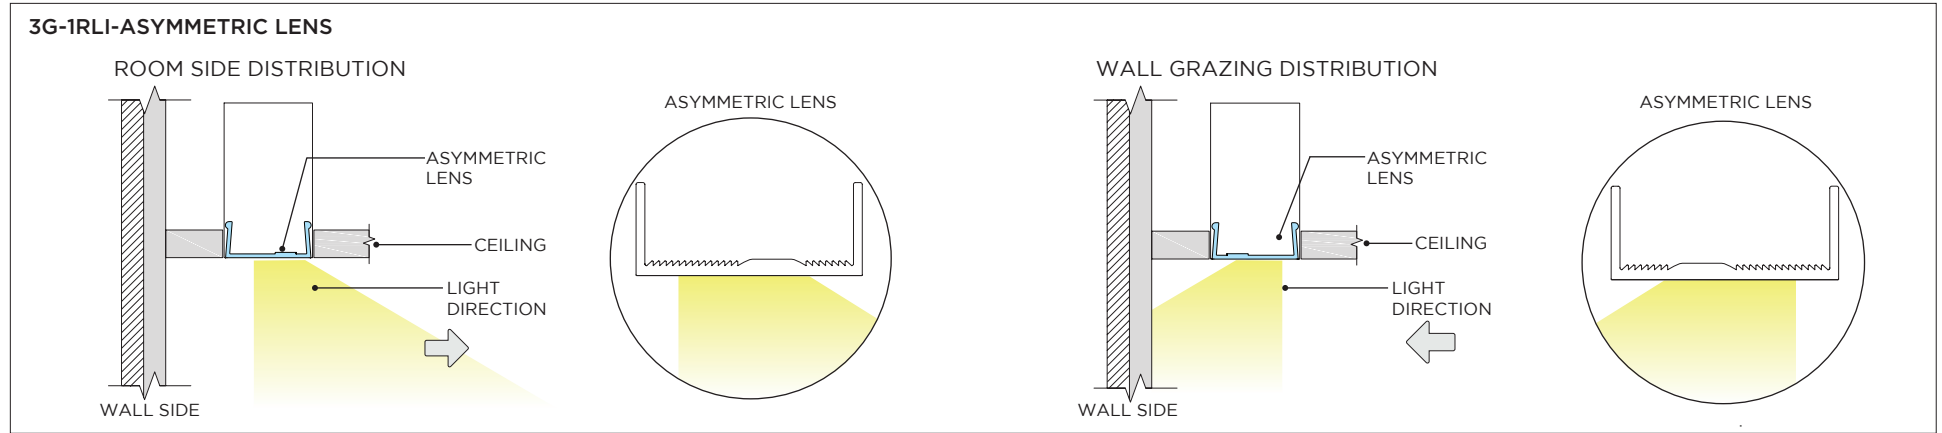

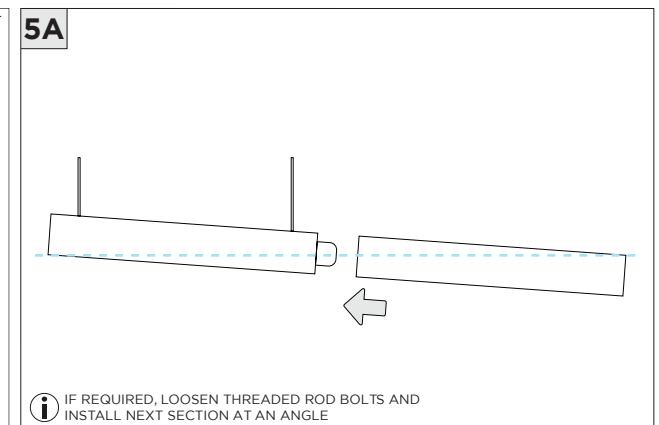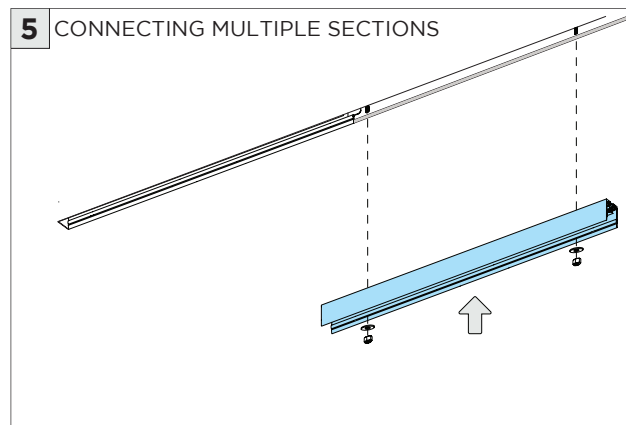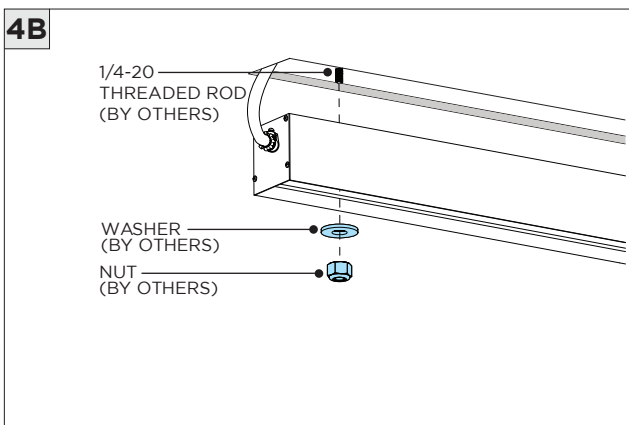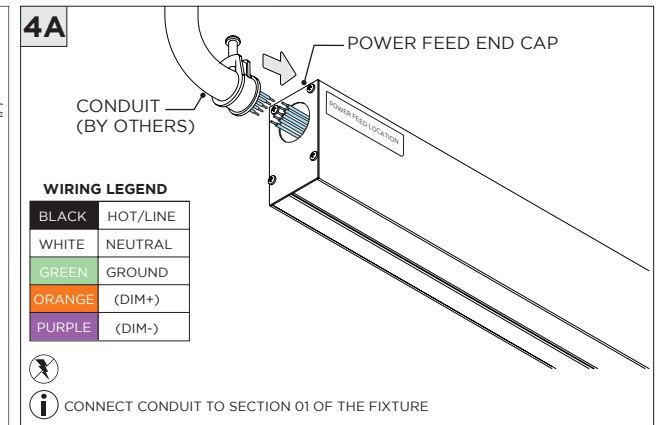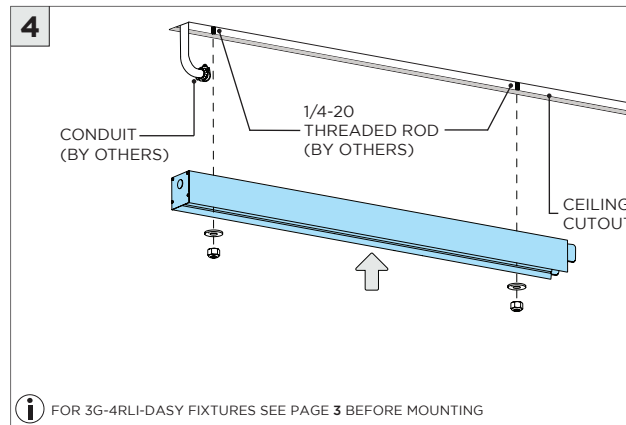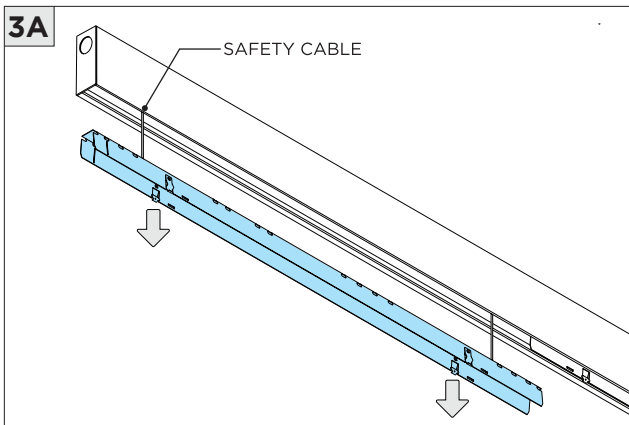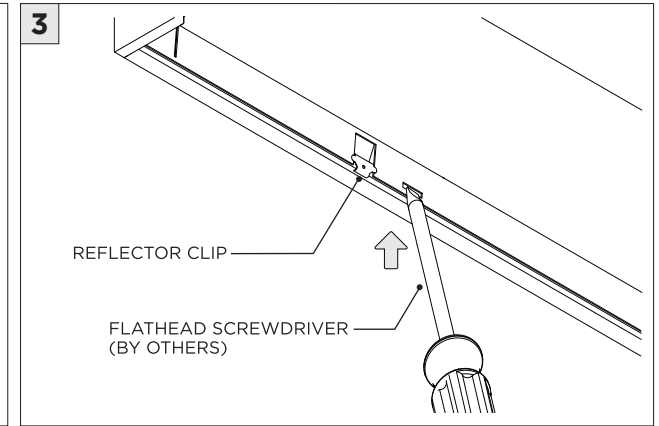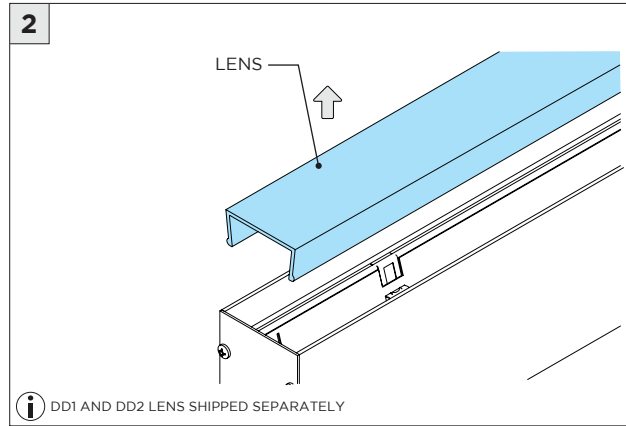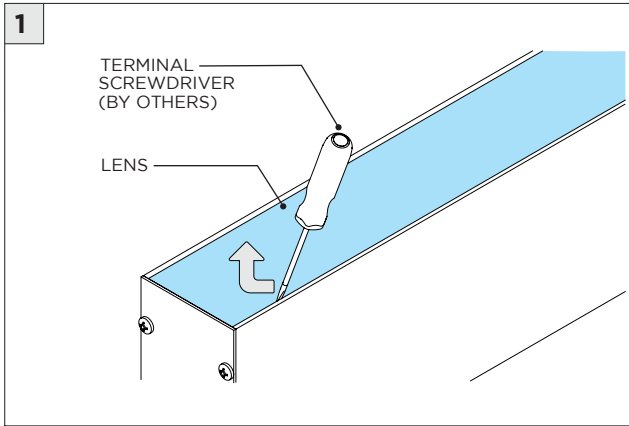

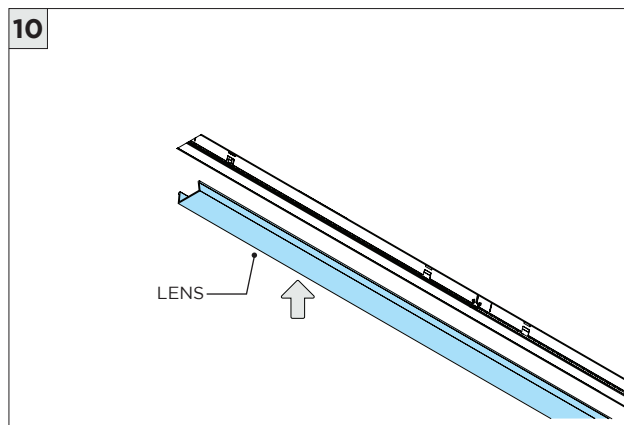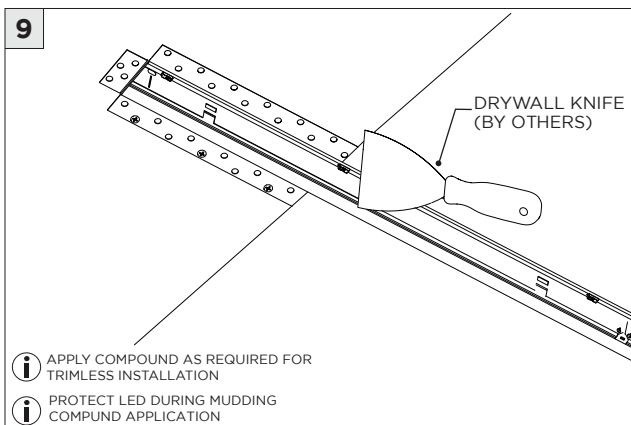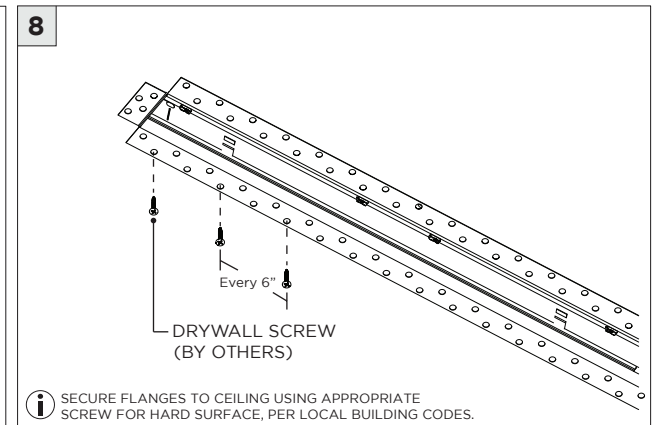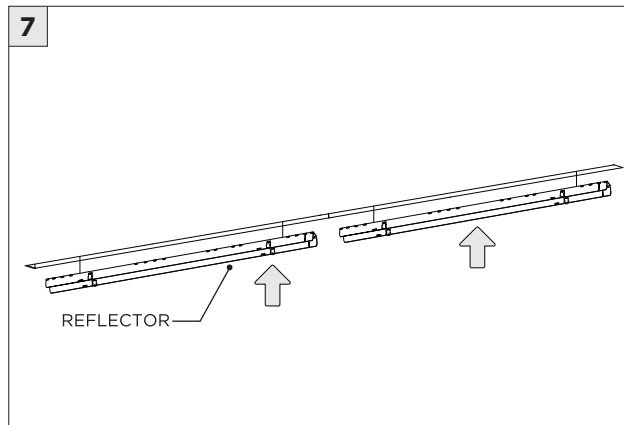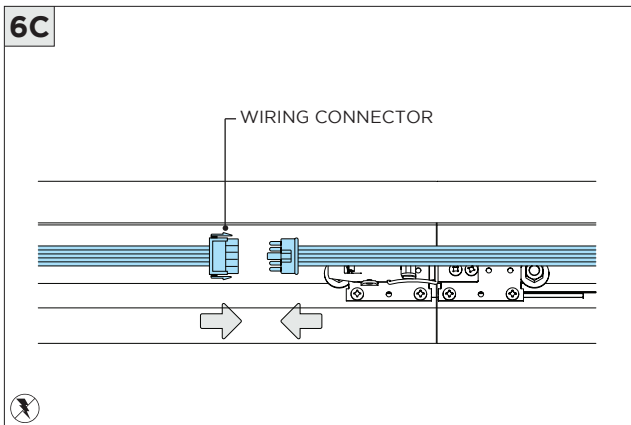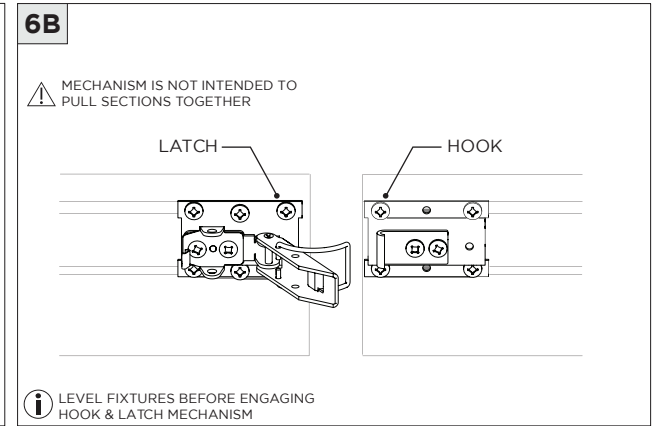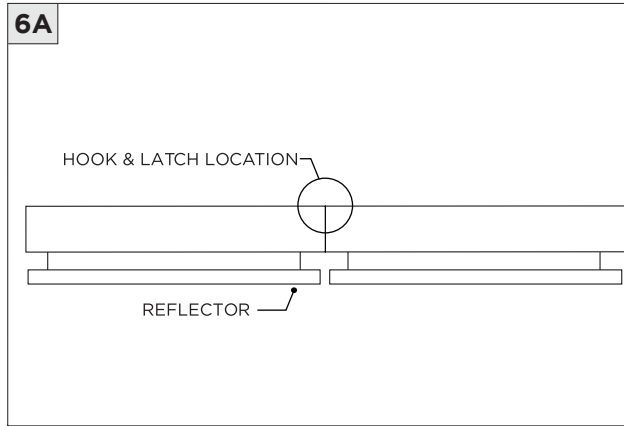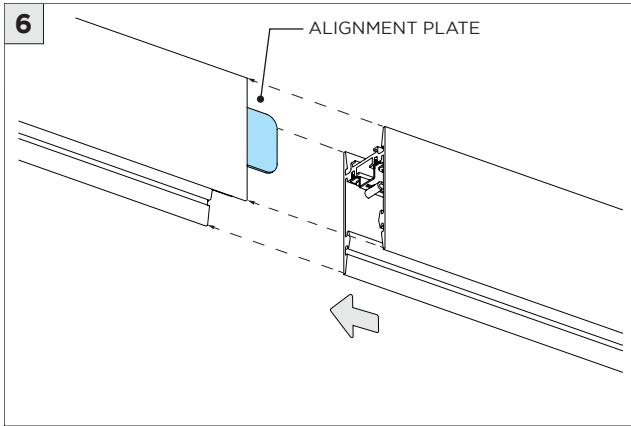

DRIVER SERVICING

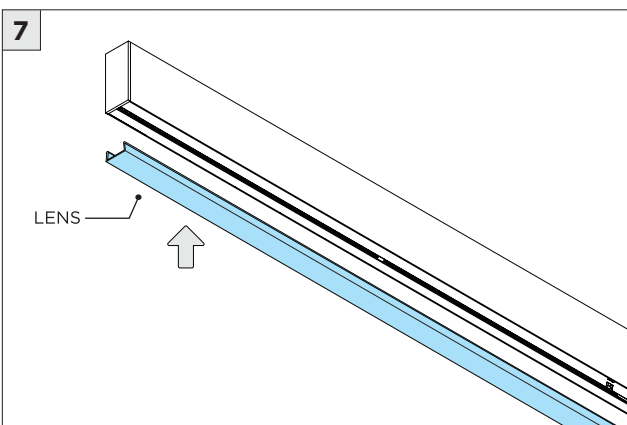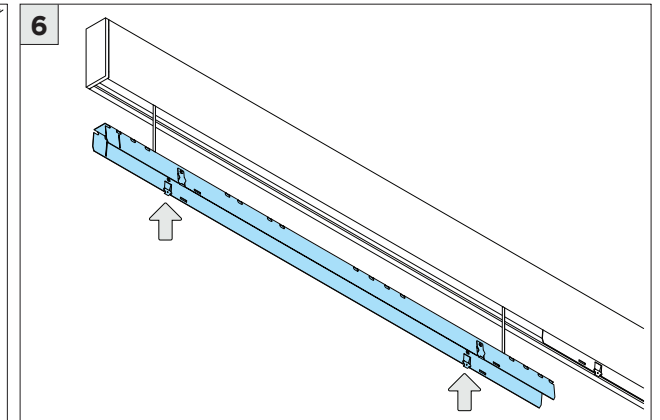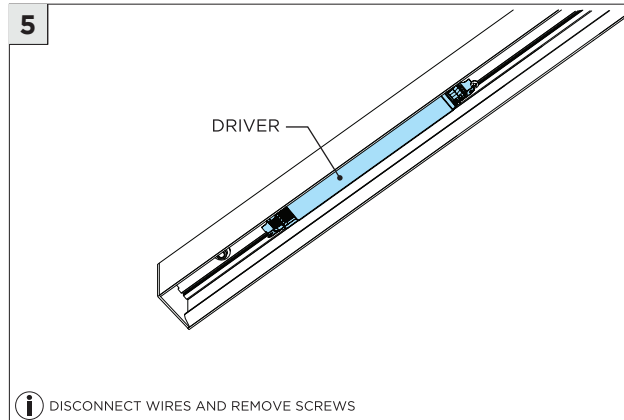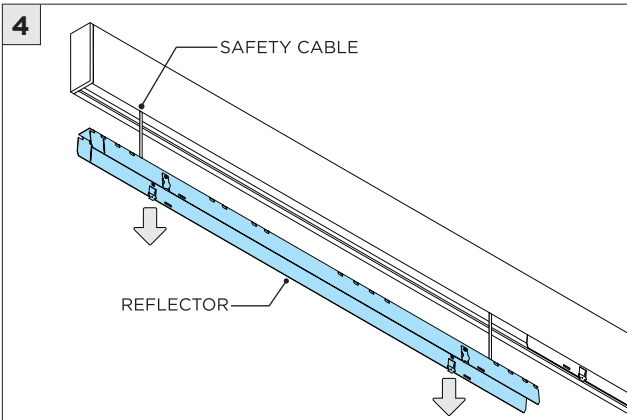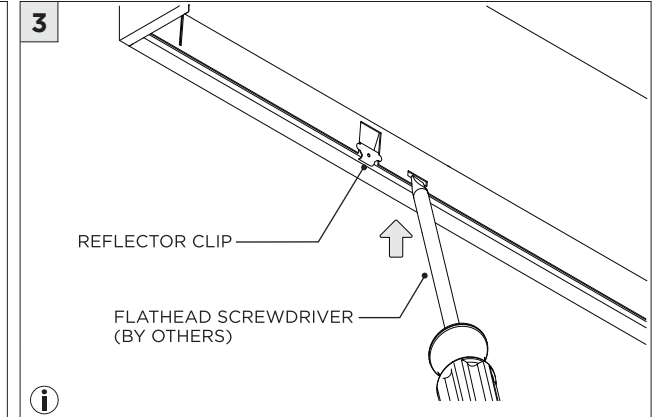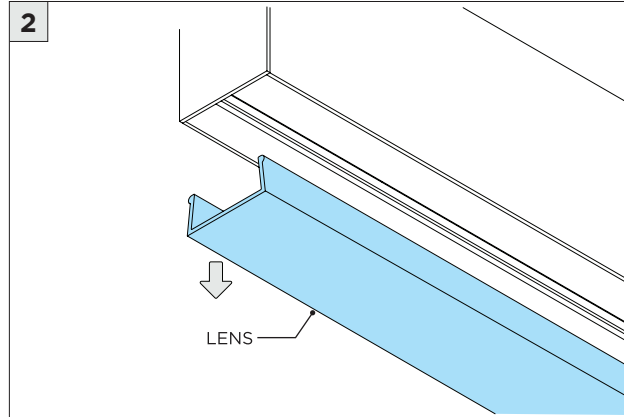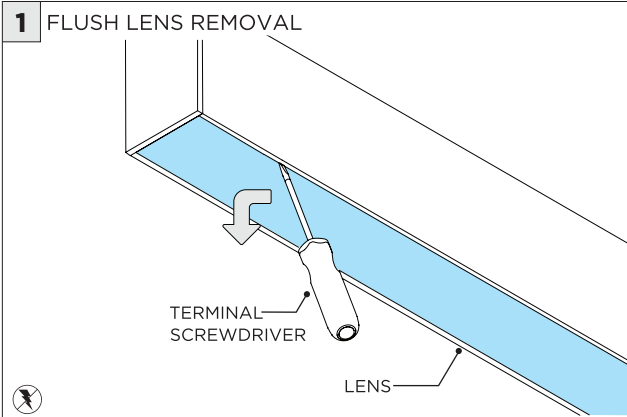

LED SERVICING - DIRECT

