



3G-1PLI 1.5" PENDANT LINIA

DIRECT
DIRECT/INDIRECT
INDIRECT




Fixture Types	Included Components			
3G-1PLI-PROFILE	Standalone Fixture (2' to 8') 	Continuous Runs (9' to 16') 	STANDALONE	LENS
Continuous Runs (17' and longer)		Power feed kit 	Non - Power feed kit 	
	STARTER JOINER ENDER LENS			


Instruction Key	Information
	ADDITIONAL INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
	ATTENTION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
	POWER ON DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	POWER OFF TURN OFF POWER DURING INSTALLATION OR SERVICING

OVERVIEW


3G-1PLI - DRYWALL SUSPENSION

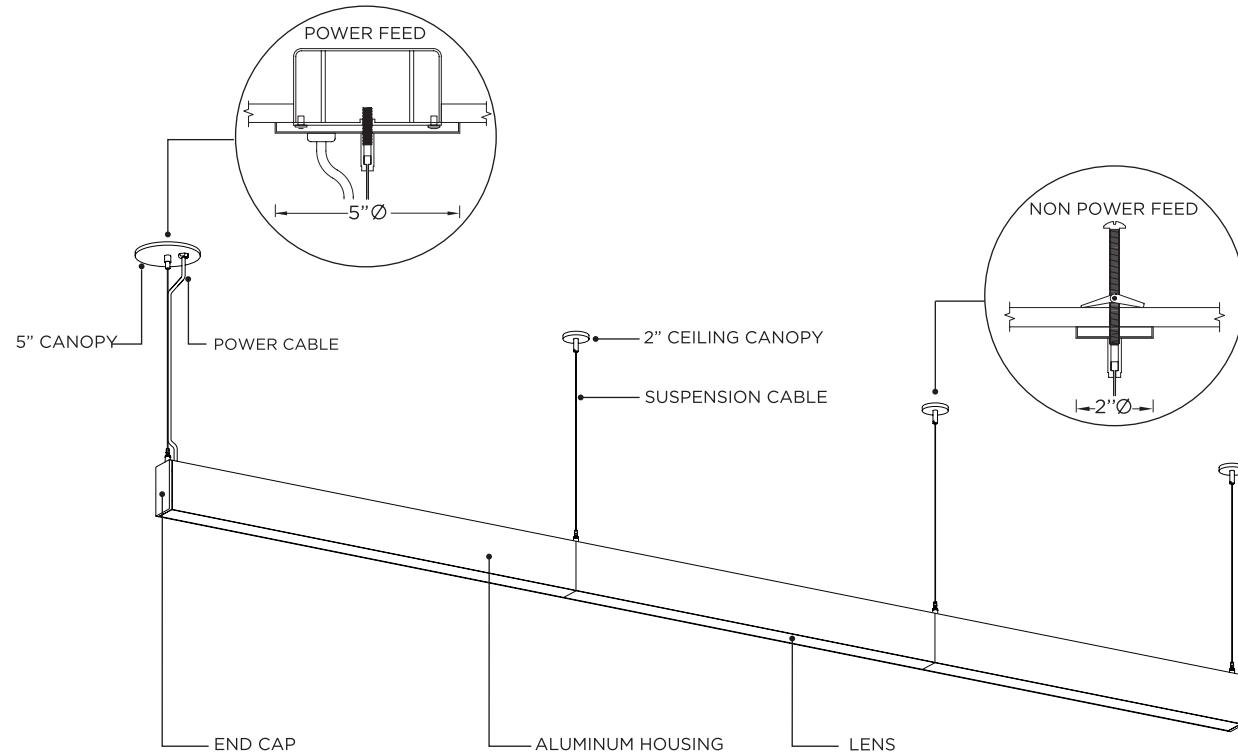


POWER FEED SUSPENSION

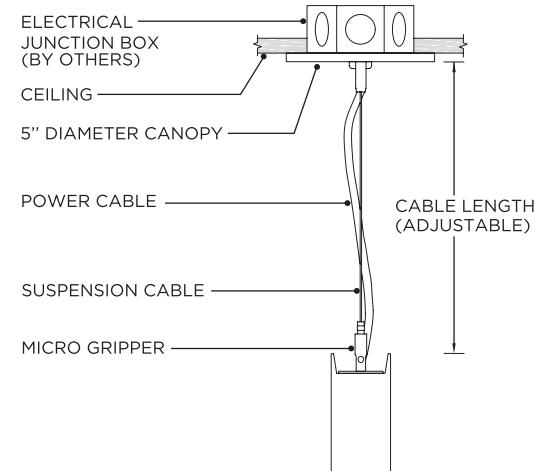


NON - POWER FEED SUSPENSION

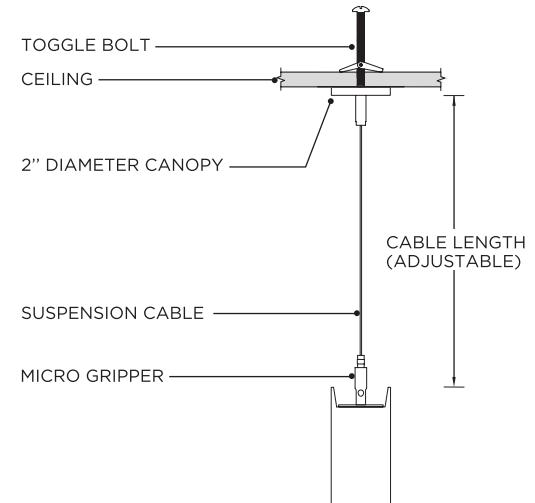


3G-1PLI - GRID CEILING - GCX

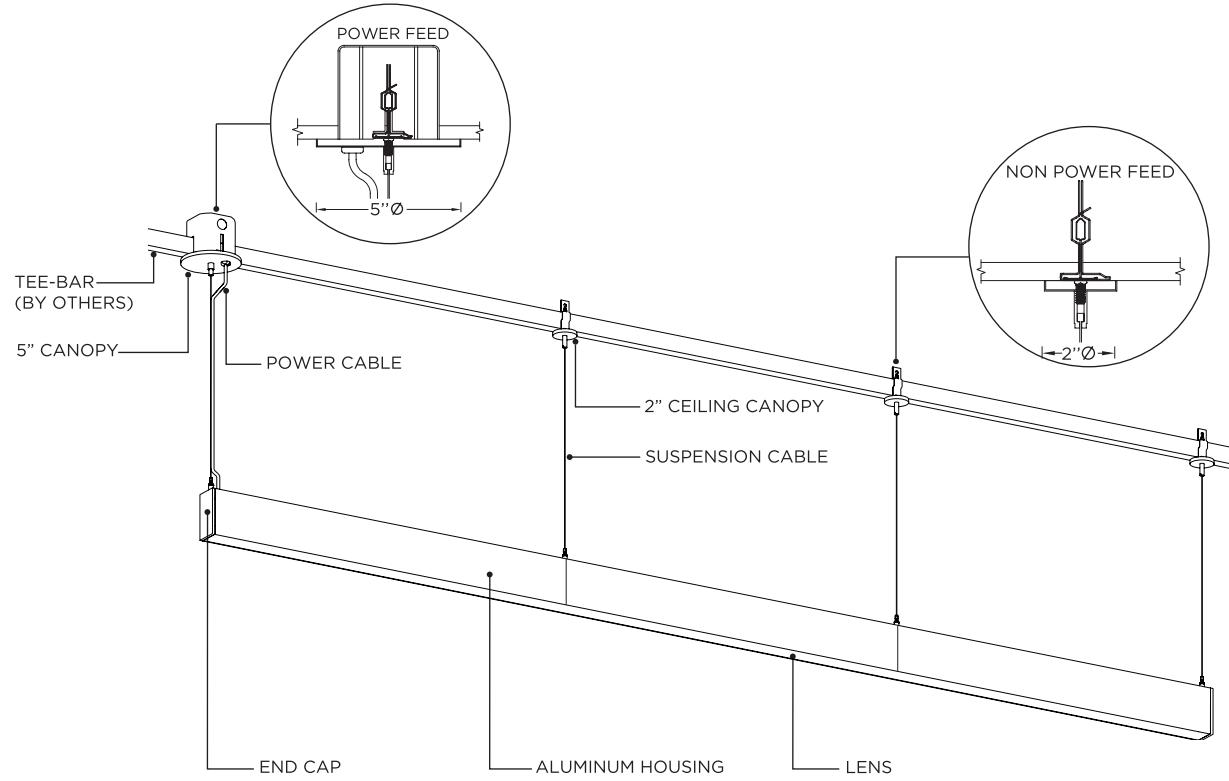

POWER FEED SUSPENSION

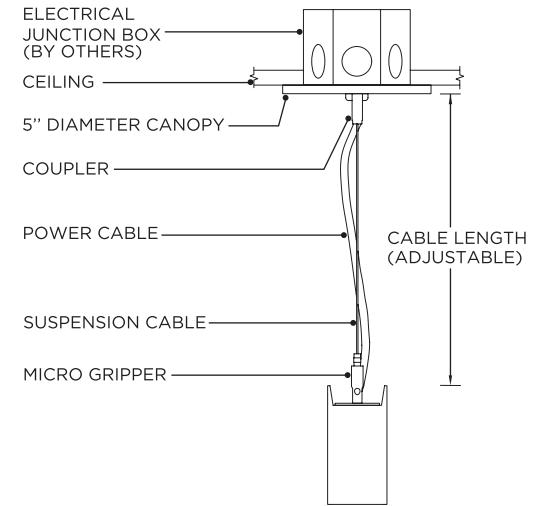



NON - POWER FEED SUSPENSION

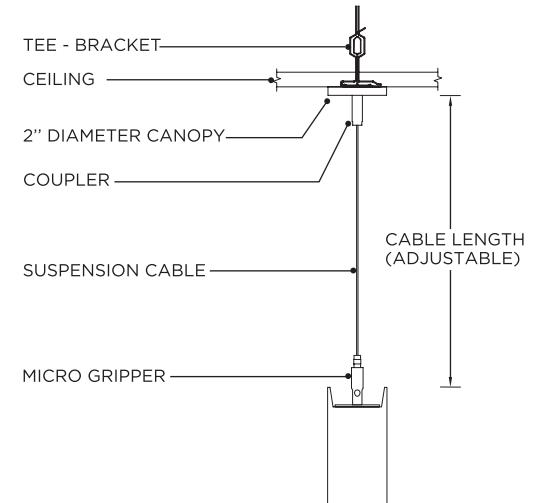



ASYMMETRIC LENS ORIENTATION

3G-1PLI - ASYMMETRIC LENS

ROOM SIDE DISTRIBUTION


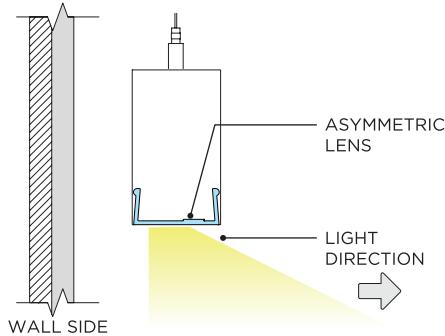


WALL GRAZING DISTRIBUTION


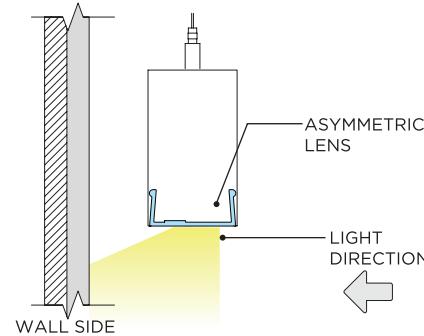


INDIRECT ASYMMETRIC OPTIC

ROOM SIDE DISTRIBUTION

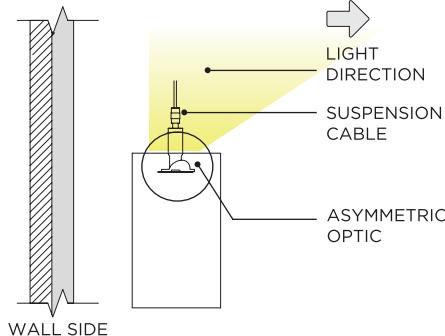


WALL GRAZING DISTRIBUTION

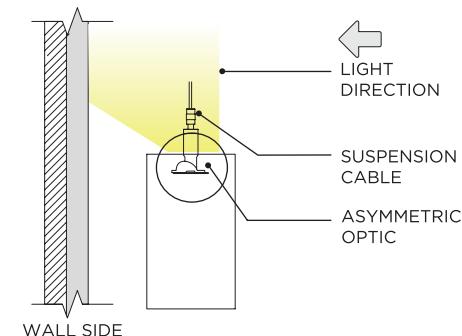

SUSPENSION CABLE LOCATION


STANDALONE

STANDALONE
AT 0.25" FROM EACH END OF LENGTH

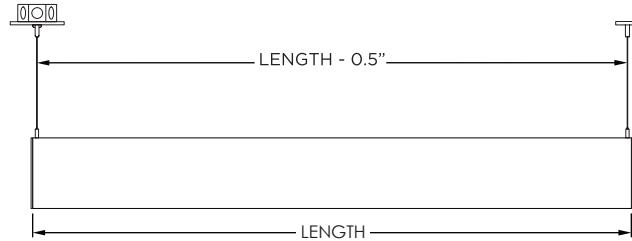

STARTER, JOINER, and ENDER

STARTER/JIONER/ENDER
AT 0.125" FROM EACH END OF SECTION LENGTH

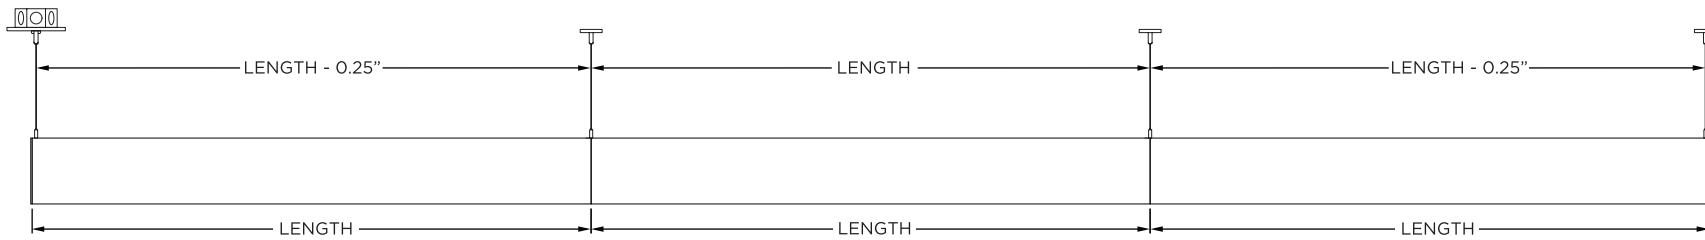

IDENTIFICATION AND PREPARATION

ID LABEL

TYPE: XX XX
ID: 01 OF 03 CO-0000
SECTION ID NUMBER ORDER NUMBER ORDER TYPE


ID LABEL

SECTION: 01 OF 03
TYPE: XX XX CO-0000




i IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS


1 DRYWALL SUSPENSION - POWER FEED

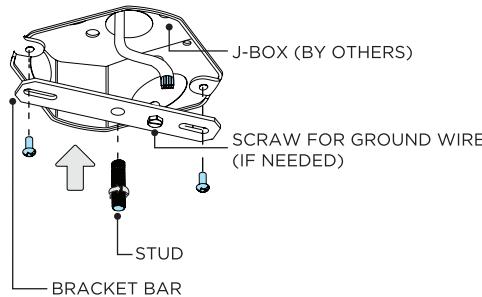


1A




2 DRYWALL SUSPENSION - NON-POWER FEED




2A

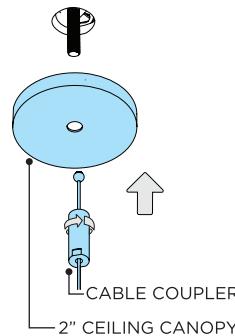


3 LENS REMOVAL

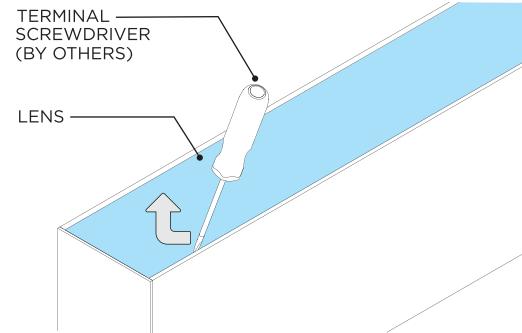


3A

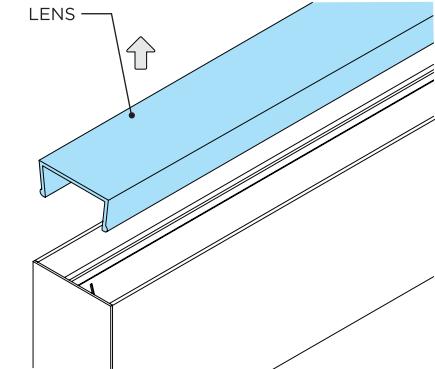


4









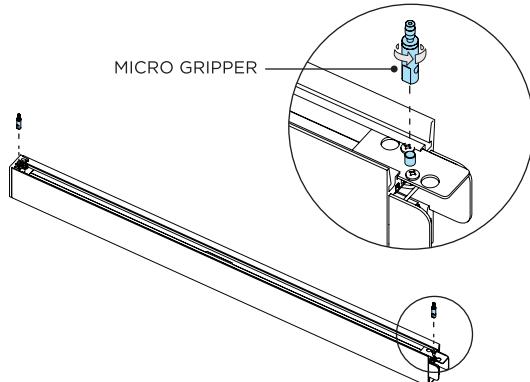


5

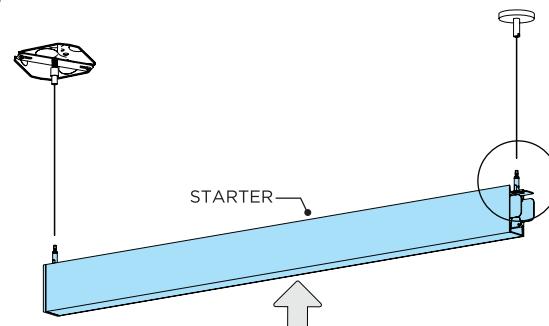

5A

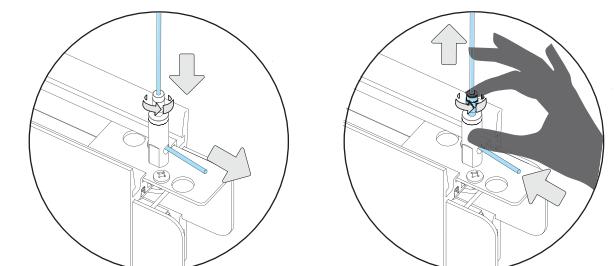

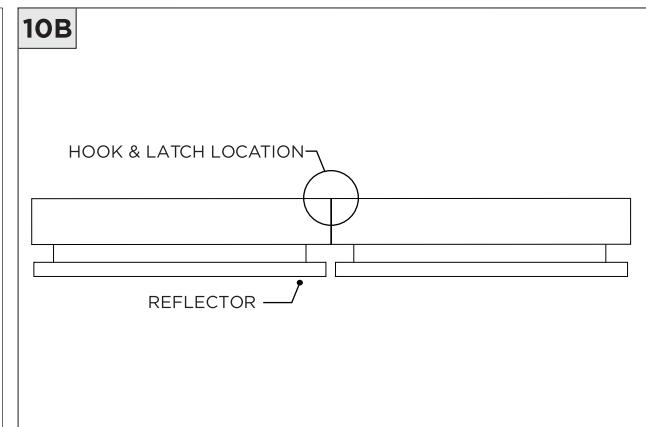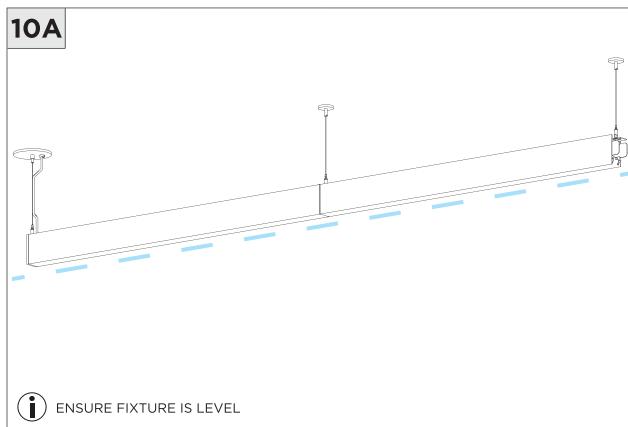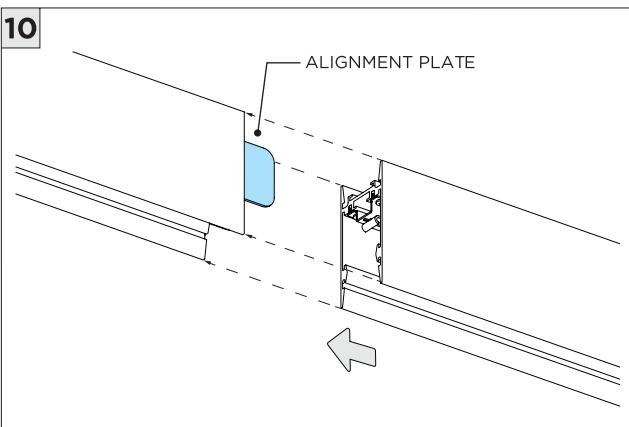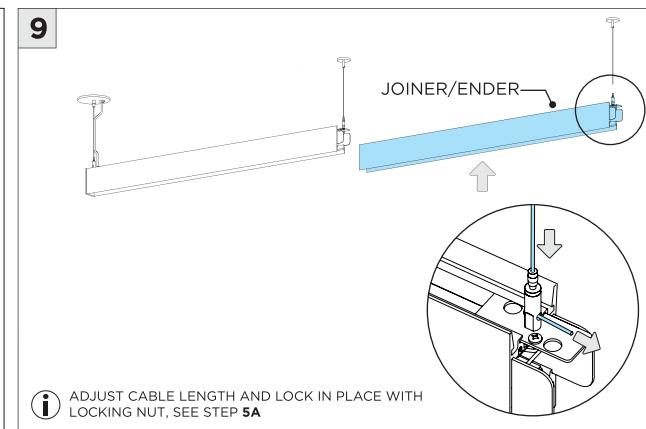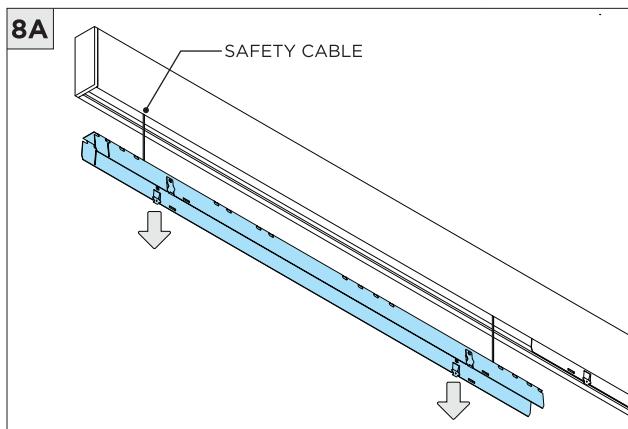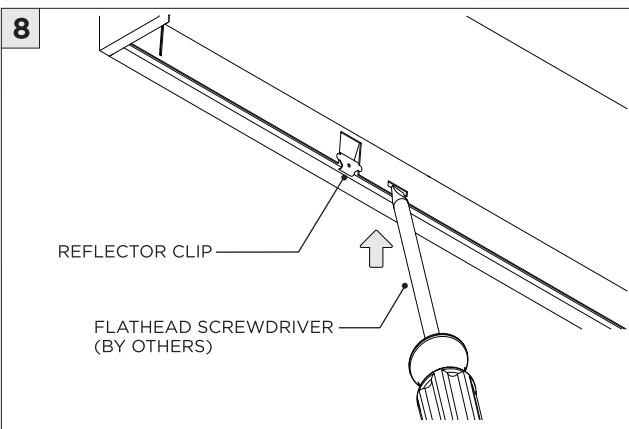
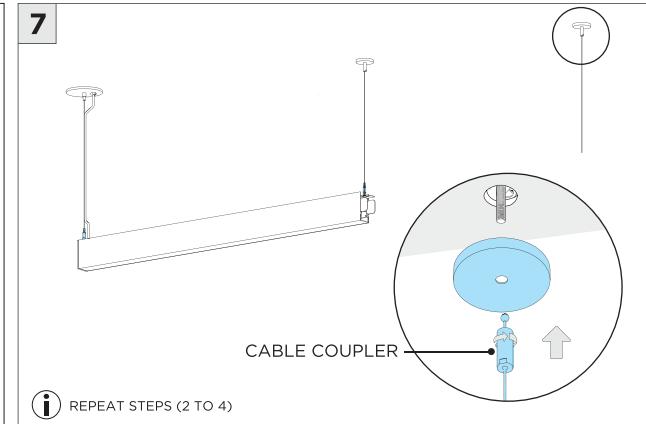
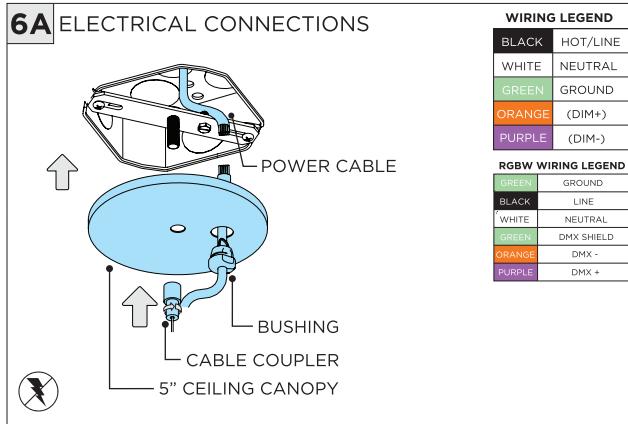
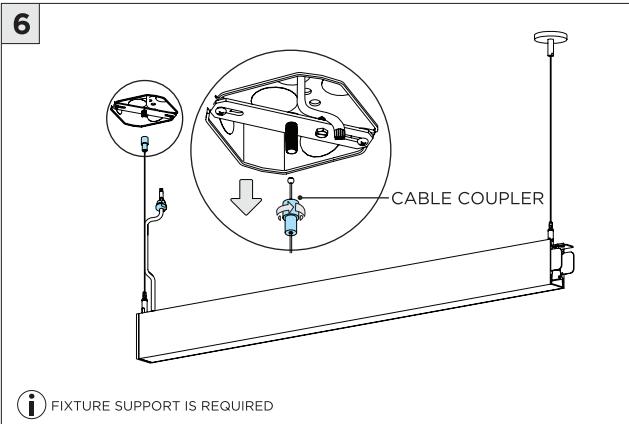





3G-1PLI
1.5" PENDANT LINIA

DIRECT
DIRECT/INDIRECT
INDIRECT


INSTALLATION INSTRUCTIONS

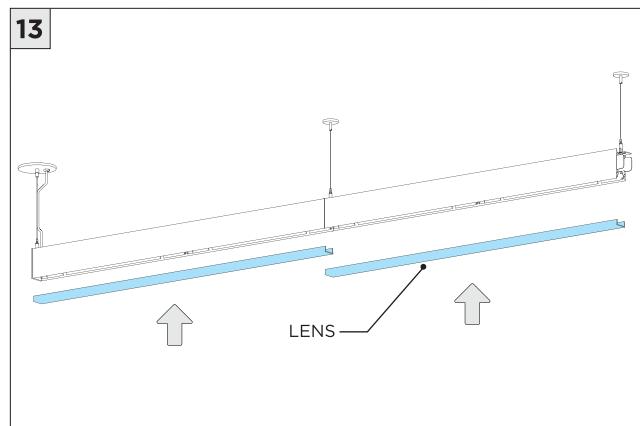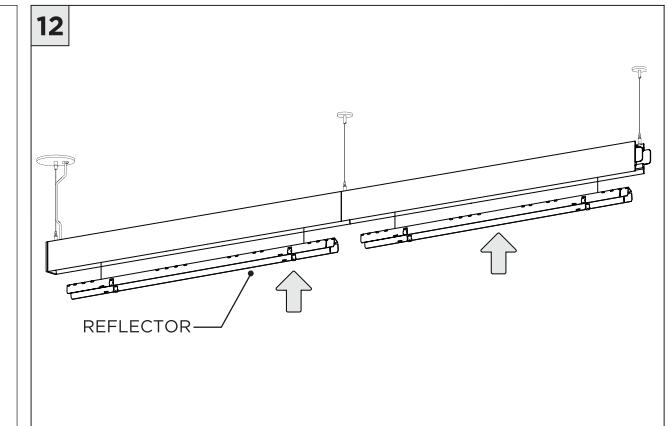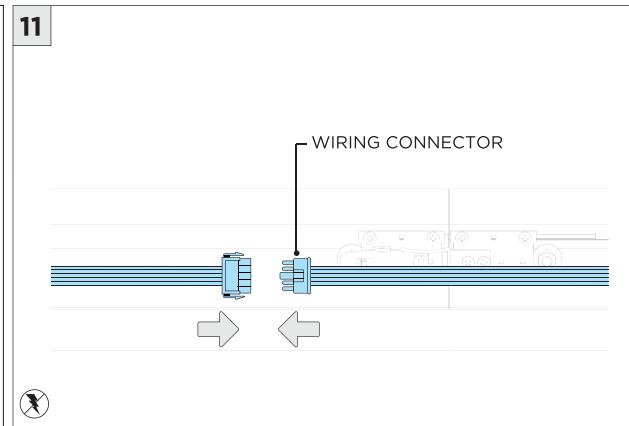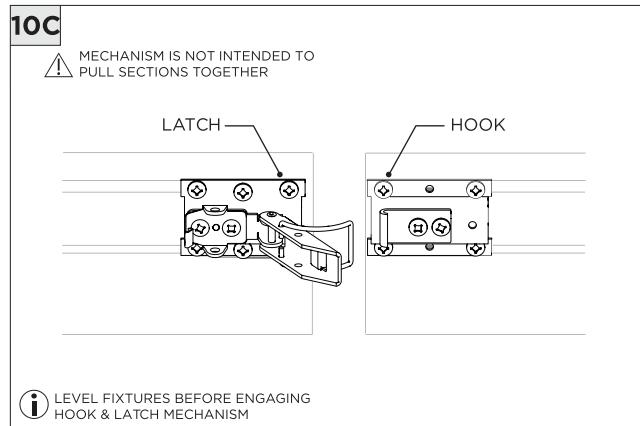



1 GRID CEILING SUSPENSION - POWER FEED

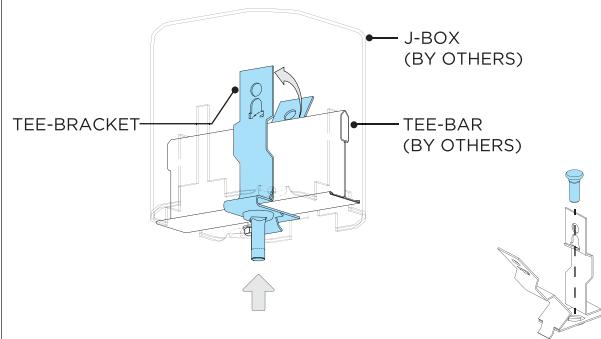


1A

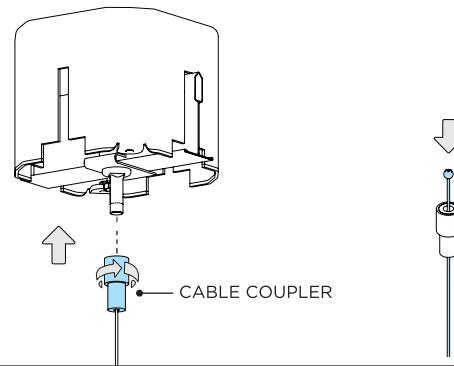




2 GRID CEILING SUSPENSION - NON-POWER FEED








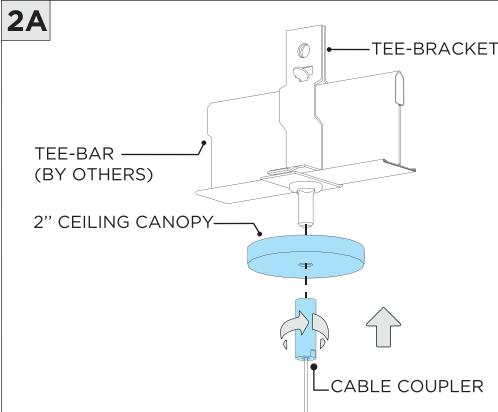
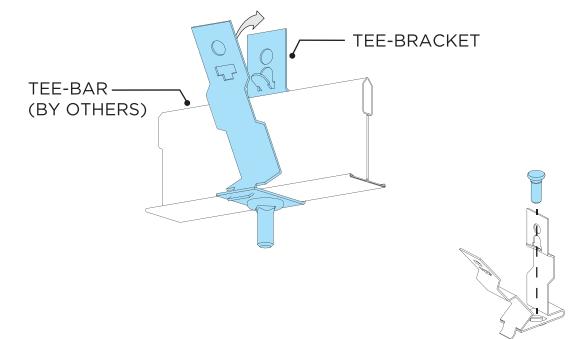


3 LENS REMOVAL

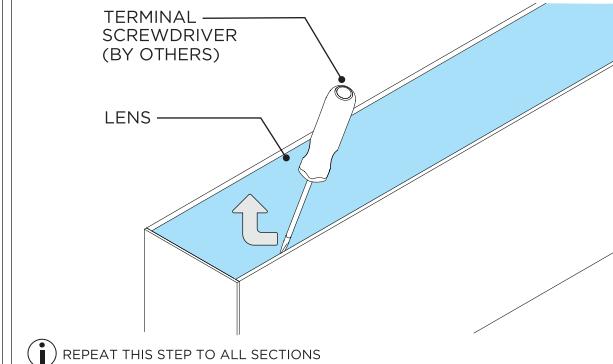

3A

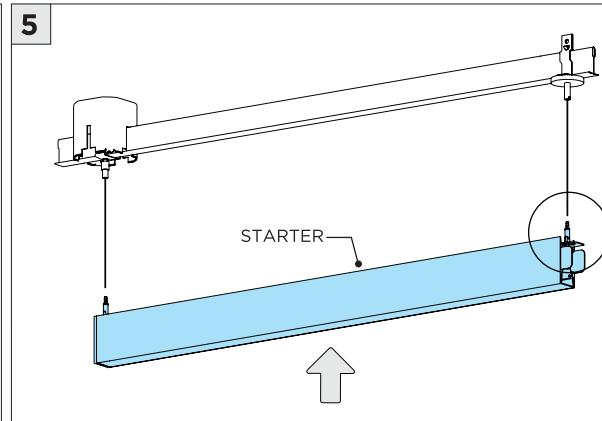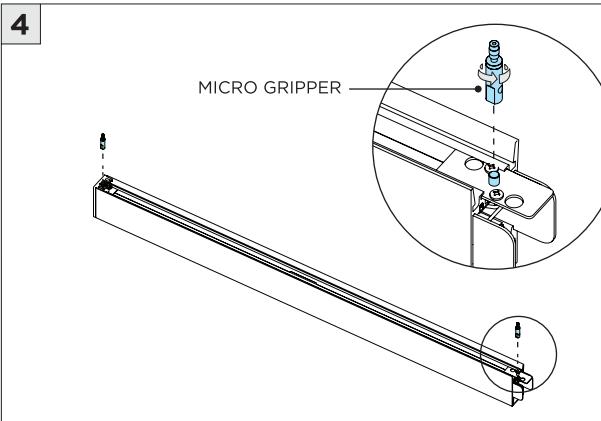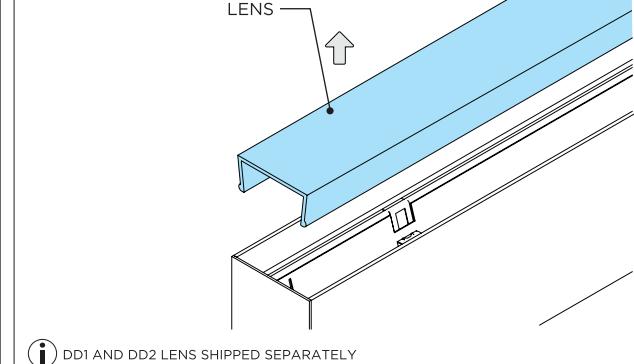

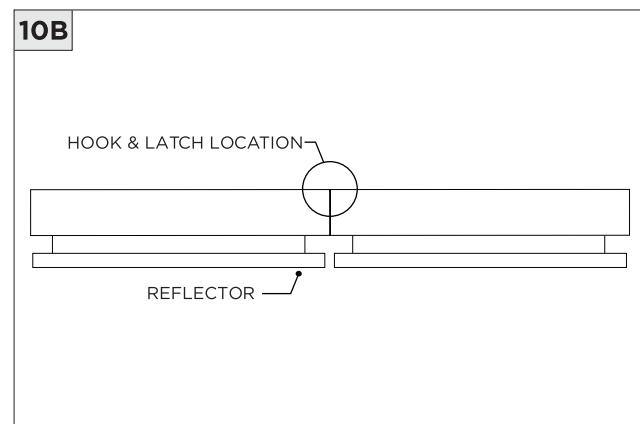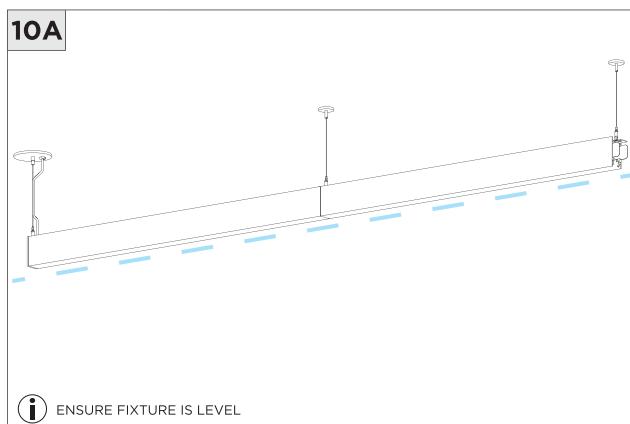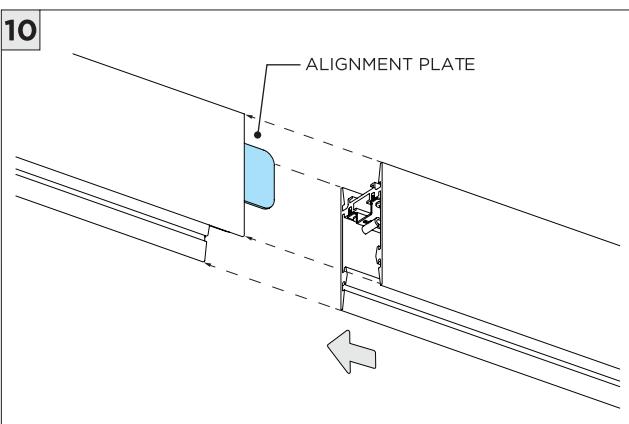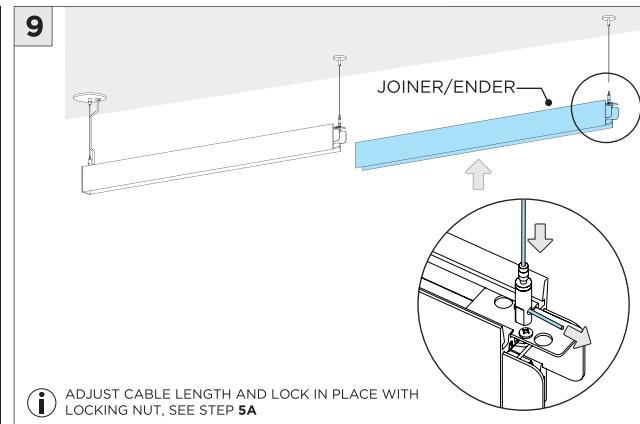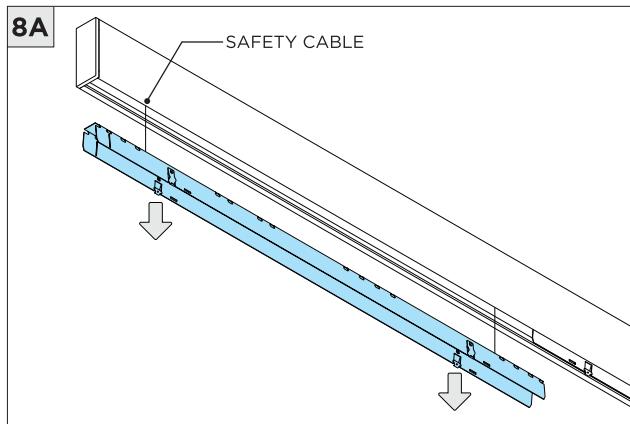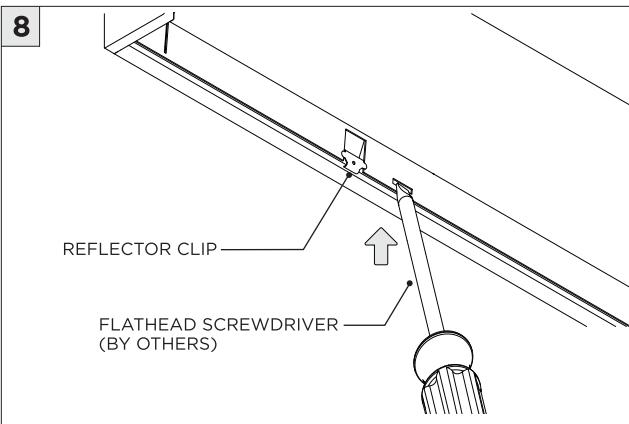
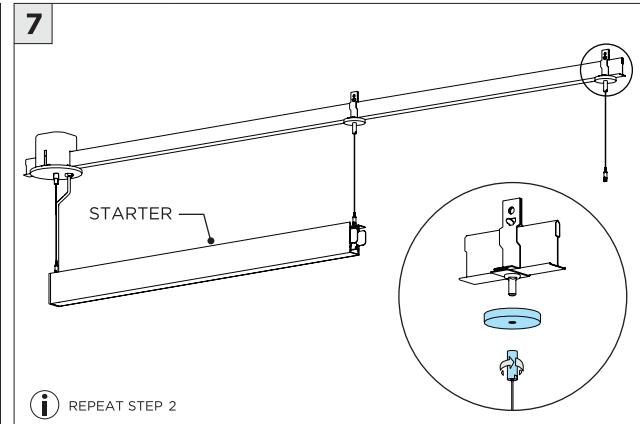
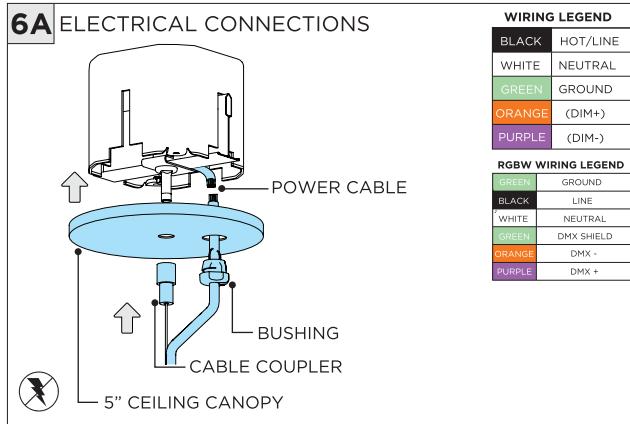
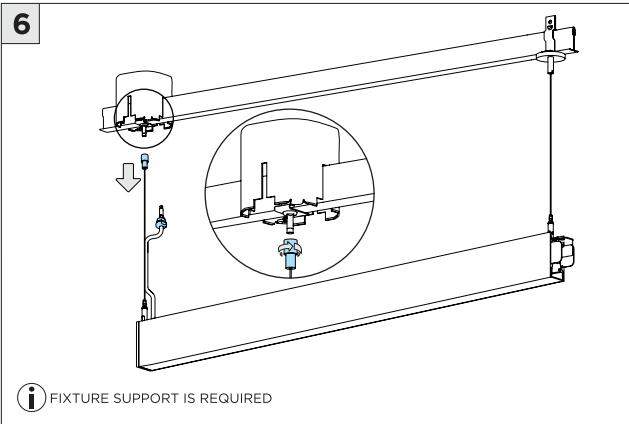




3G-1PLI
1.5" PENDANT LINIA


DIRECT
DIRECT/INDIRECT
INDIRECT

INSTALLATION INSTRUCTIONS

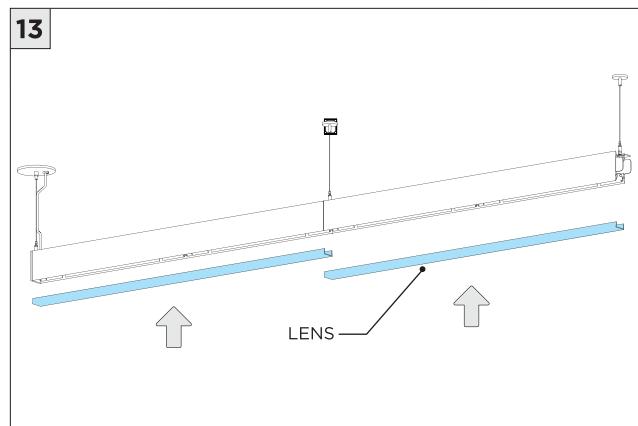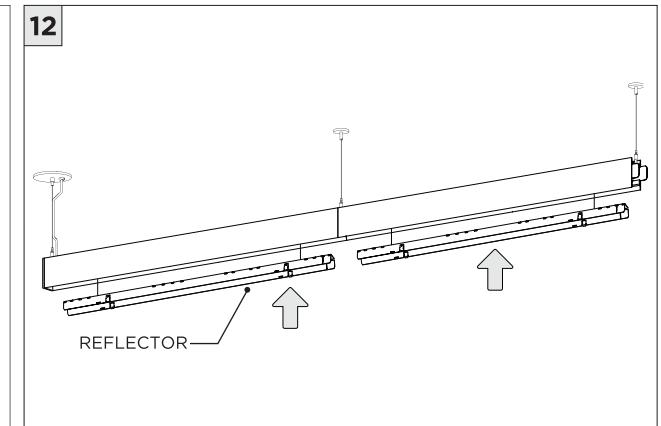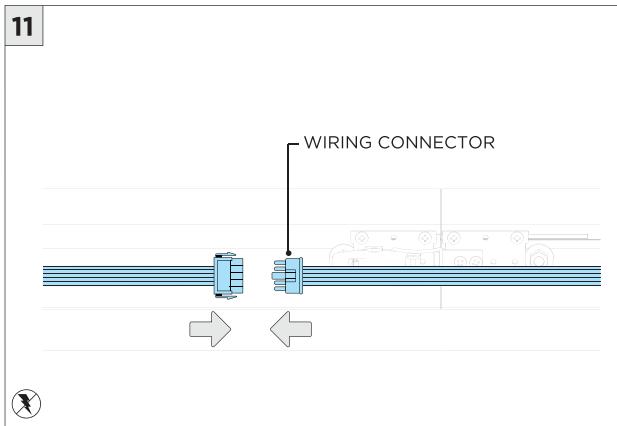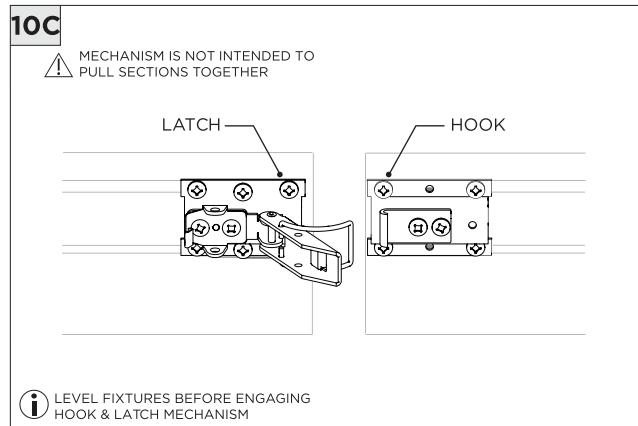


DRIVER SERVICING


1 FLUSH LENS REMOVAL

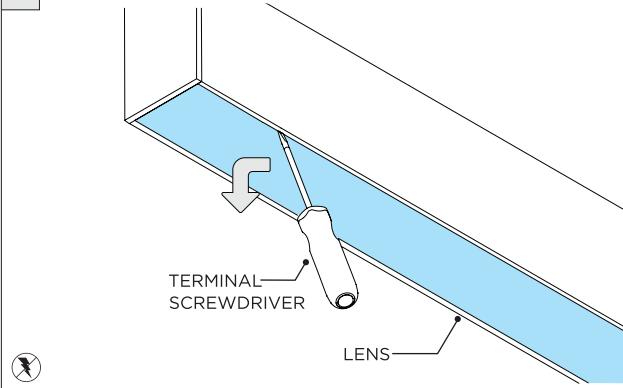


2

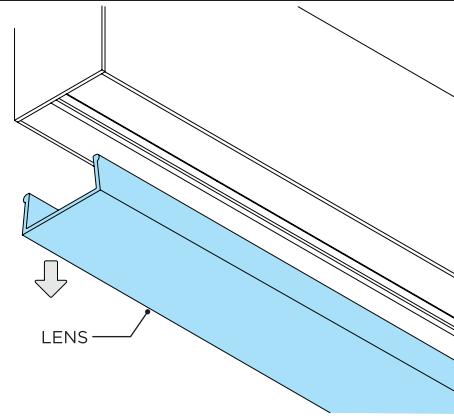


3

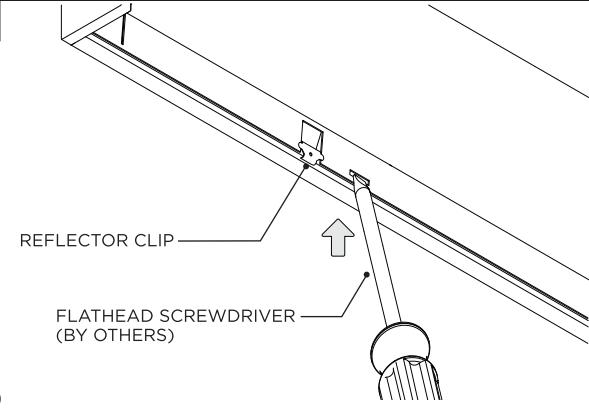


4 SAFETY CABLE

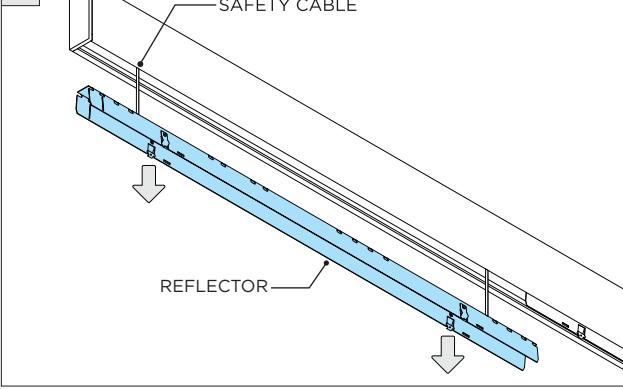


5

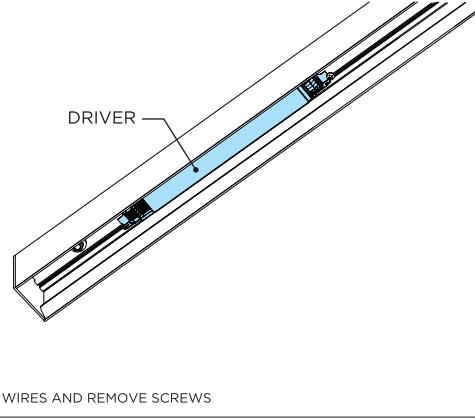










6

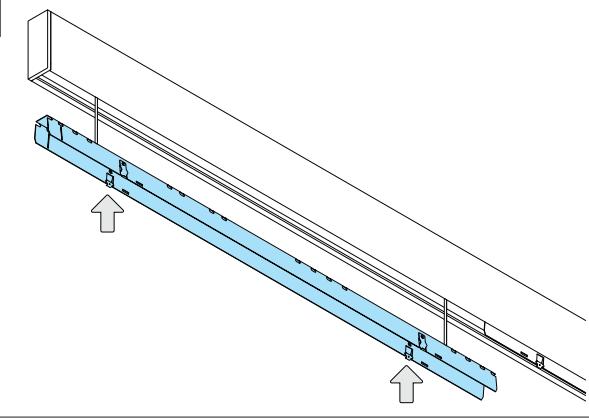

7

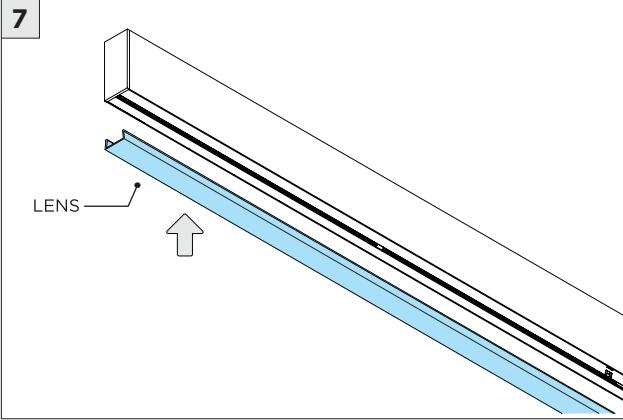


LED SERVICING - DIRECT

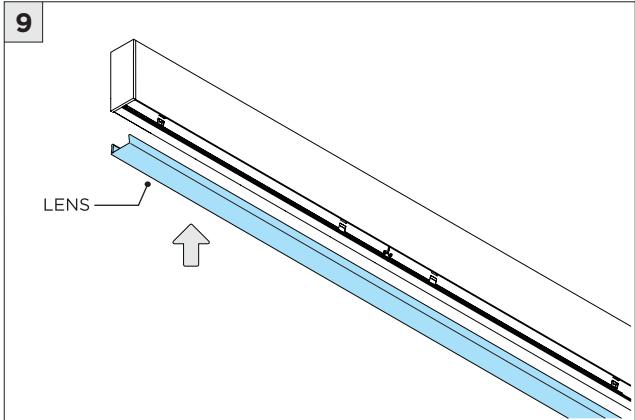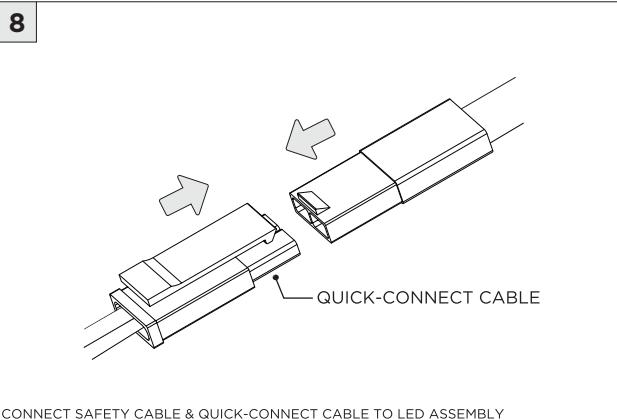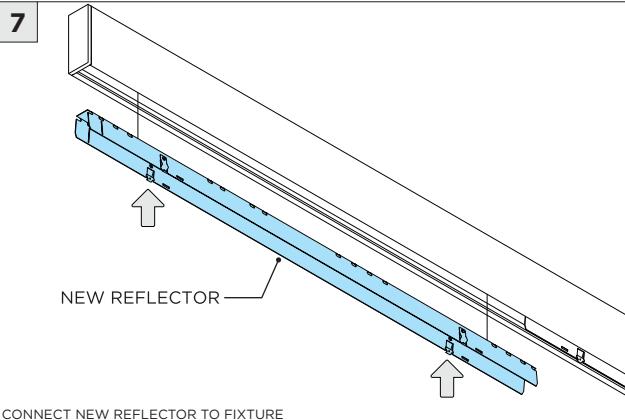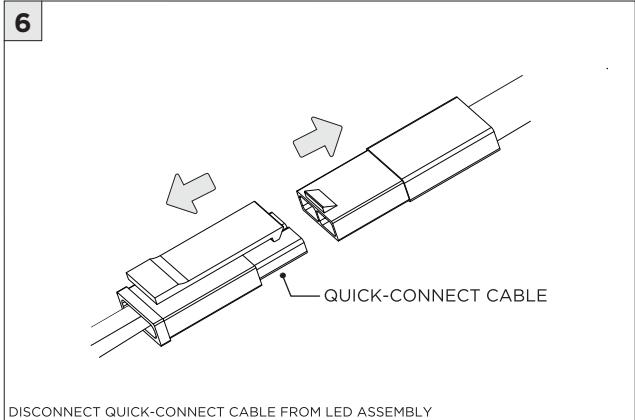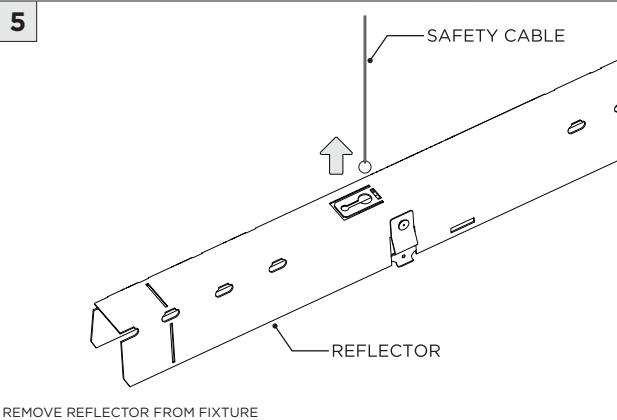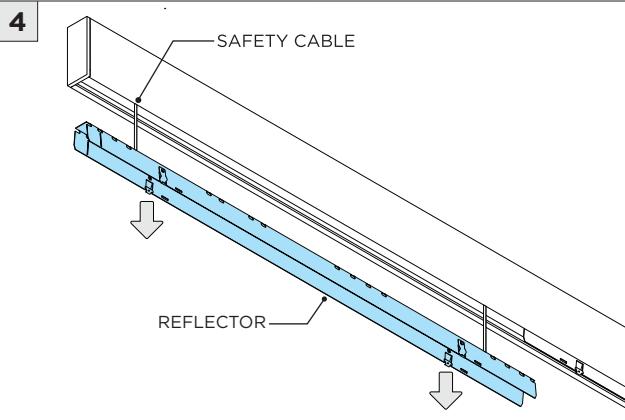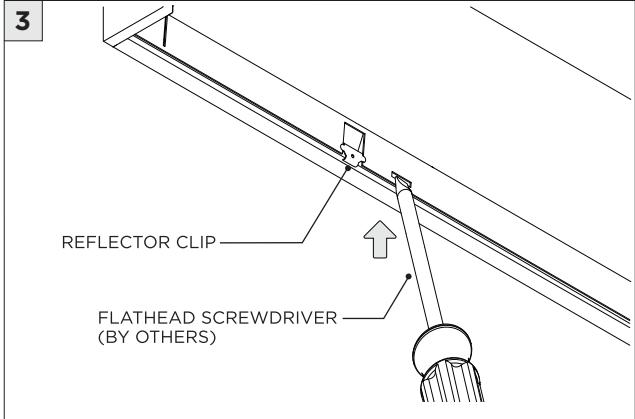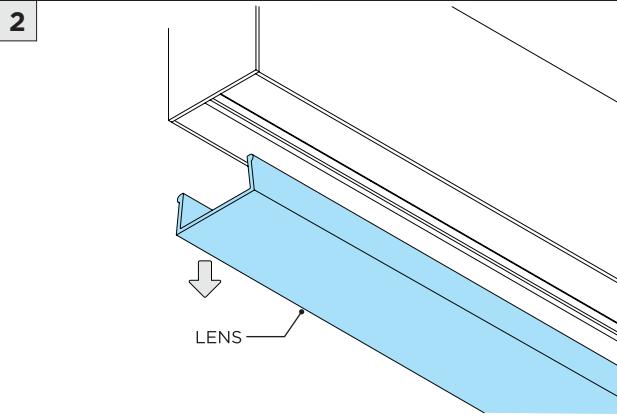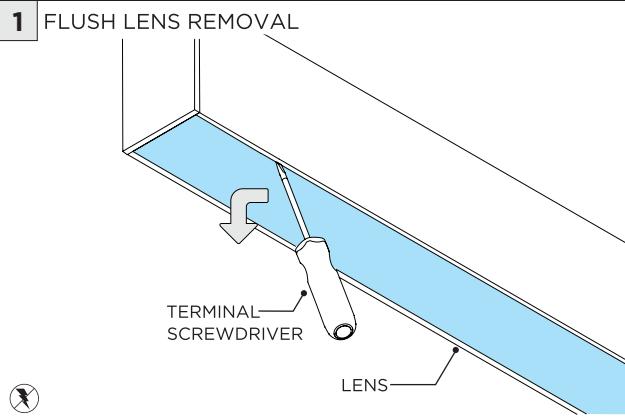


LED SERVICING - INDIRECT


1 INDIRECT LENS REMOVAL

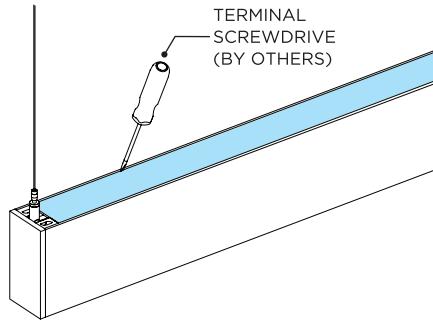


2

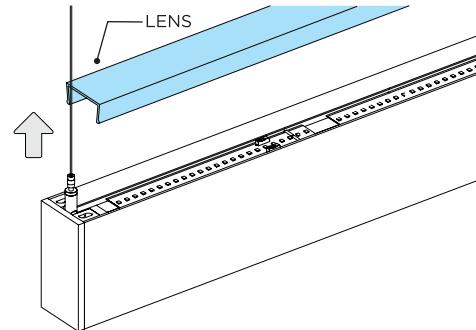


3

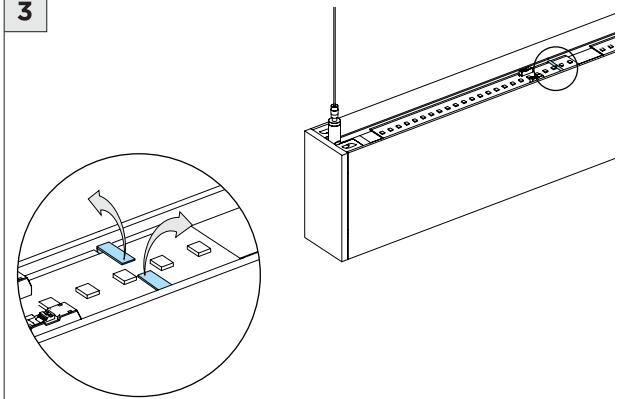


4

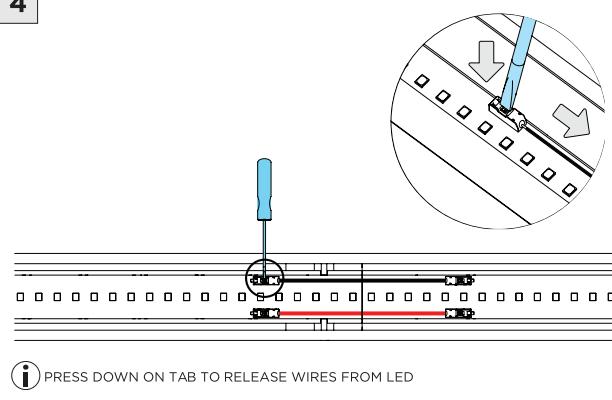


5

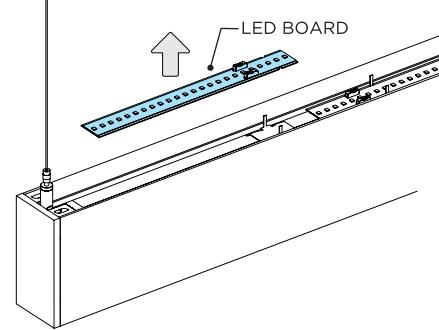


6

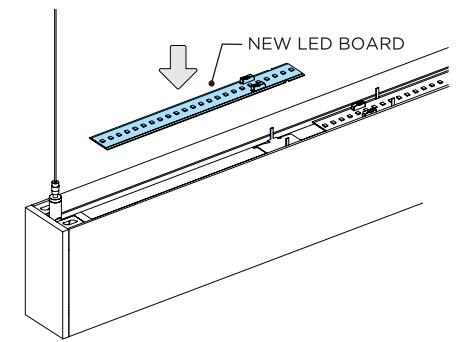

7

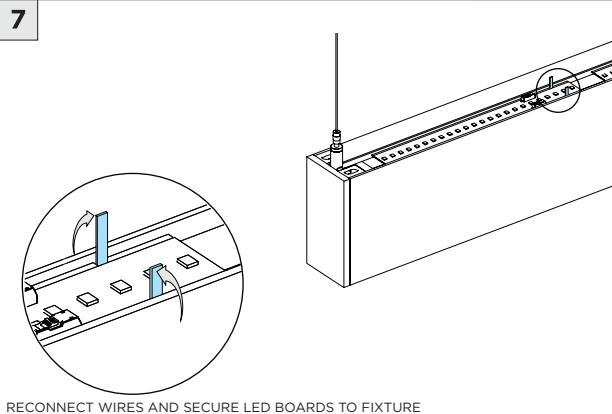

8

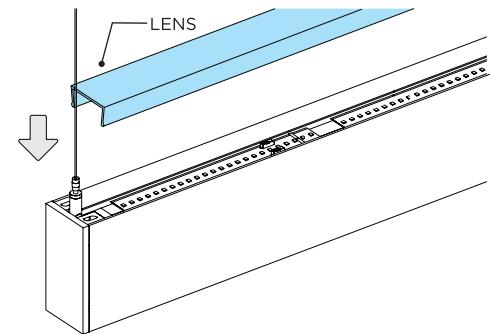

LED SERVICING - INDIRECT - ASYMMETRIC AND WIDE SPREAD OPTIC

