








3G-1RLI-WC, 3G-2RLI-WC, and 3G-4RLI-WC
1.5", 2", and 3.5" RECESSED LINIA WALL TO CEILING
FLANGELESS

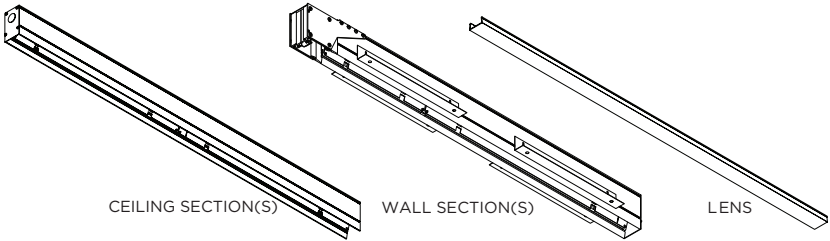

⚠ FOR NEW CONSTRUCTION INSTALLATION ONLY
ℹ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

FIXTURE TYPES			INCLUDED COMPONENTS		
1RLI PROFILE	2RLI PROFILE	4RLI PROFILE			


INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
 ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
 POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

OVERVIEW

3G-1RLI, 2RLI, 4RLI - **FLANGELESS - FX**




FLANGELESS - FX - CEILING SECTION

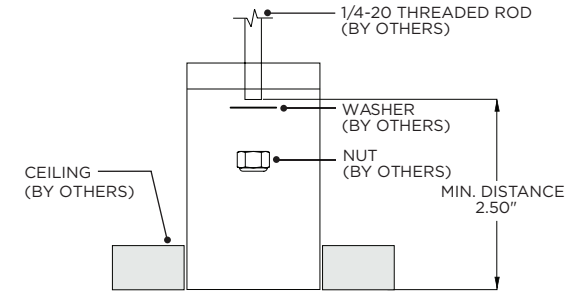

FLANGELESS - FX - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-1RLI	1.600"	LENGTH + 0.125"
3G-2RLI	2.063"	LENGTH + 0.125"
3G-4RLI	3.490"	LENGTH + 0.125"

FLANGELESS - FX - WALL SECTION

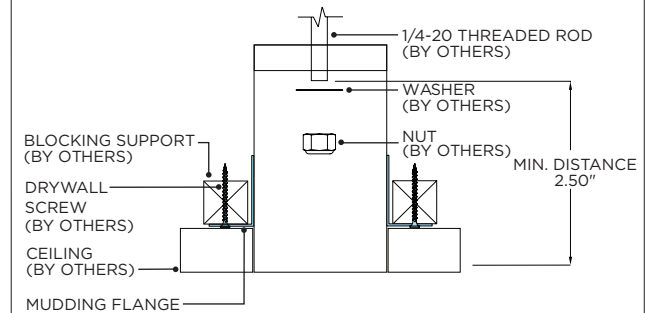


FLANGELESS - FX - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-1RLI	1.600"	LENGTH + 0.125"
3G-2RLI	2.063"	LENGTH + 0.125"
3G-4RLI	3.490"	LENGTH + 0.125"


ASYMMETRIC LENS ORIENTATION

3G-1RLI, 3G-2RLI-ASYMMETRIC LENS


ROOM SIDE DISTRIBUTION

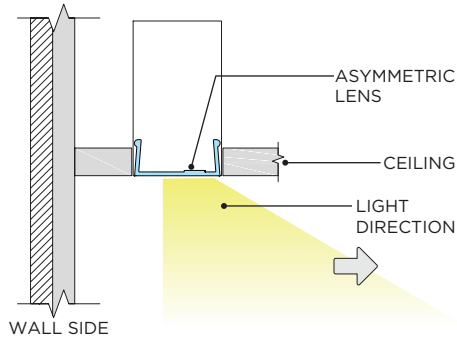


ASYMMETRIC LENS



WALL GRAZING DISTRIBUTION

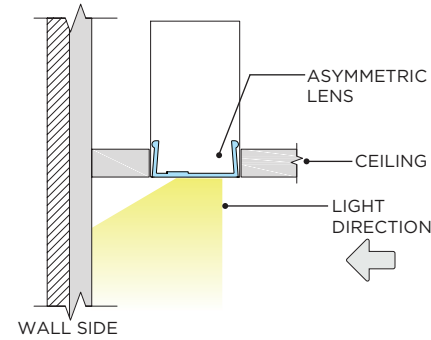


ASYMMETRIC LENS




3G-4RI-ASYMMETRIC LENS/REFLECTOR ORIENTATION


ROOM SIDE DISTRIBUTION

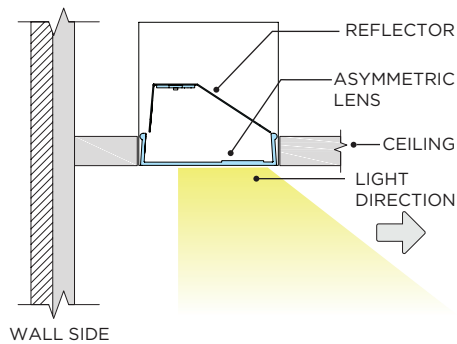


ASYMMETRIC LENS




WALL GRAZING DISTRIBUTION

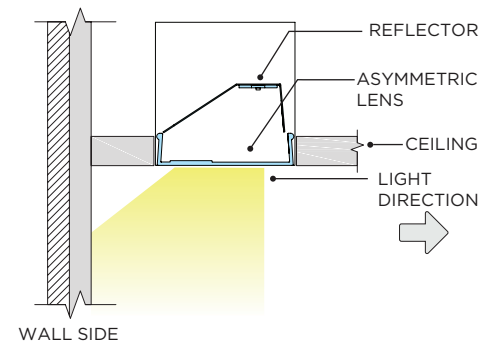

ASYMMETRIC LENS



THREADED ROD LOCATION

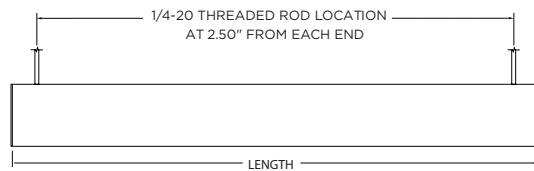

THREADED ROD LOCATION

3'	31"	6'	67"
4'	43"	7'	79"
5'	55"	8'	91"

IDENTIFICATION AND PREPARATION


ID LABEL



ORDER TYPE ORDER NUMBER SECTION ID NUMBER

i IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS










ID LABEL




STARTER

JOINER


ENDER

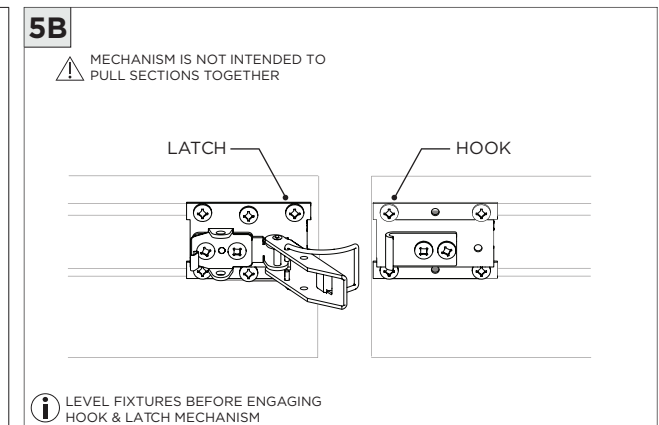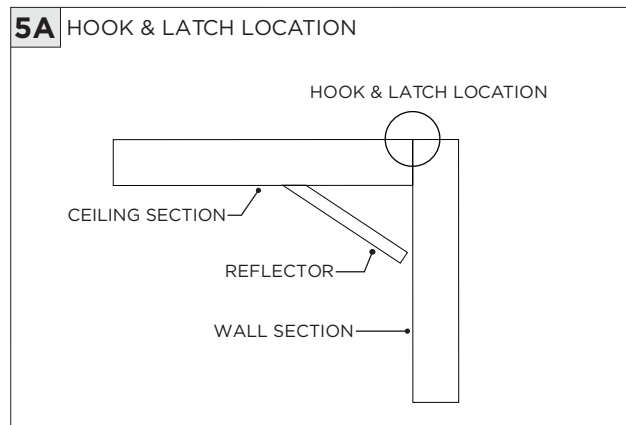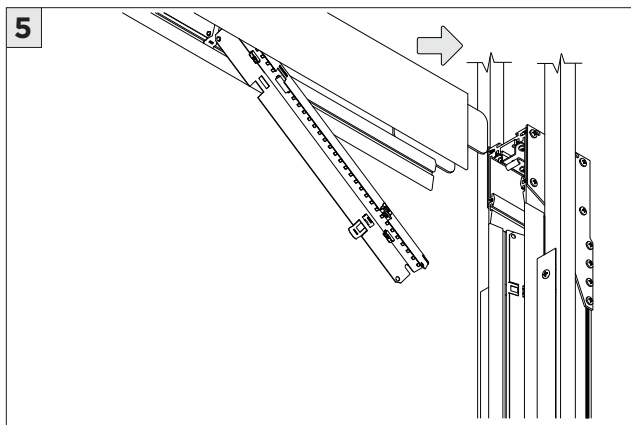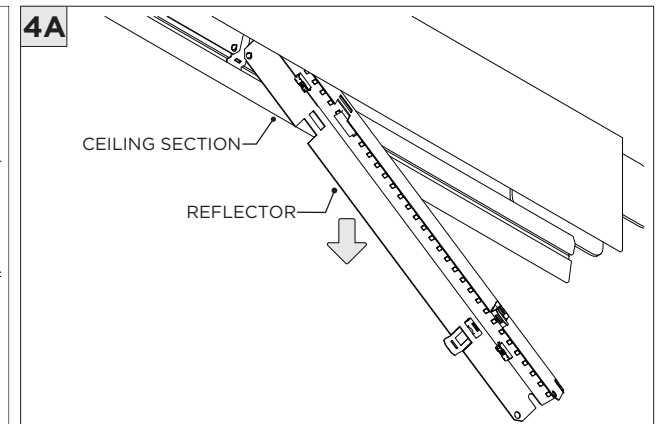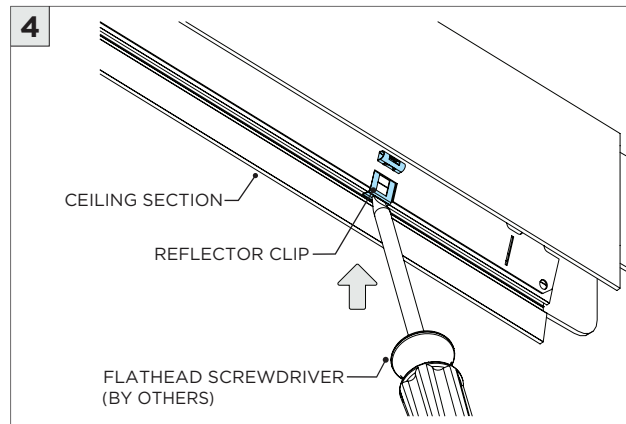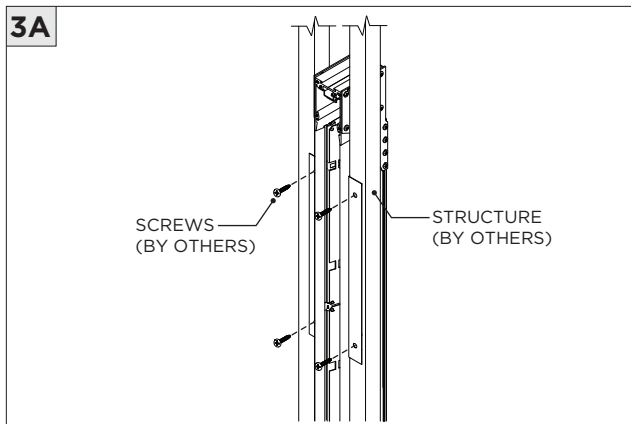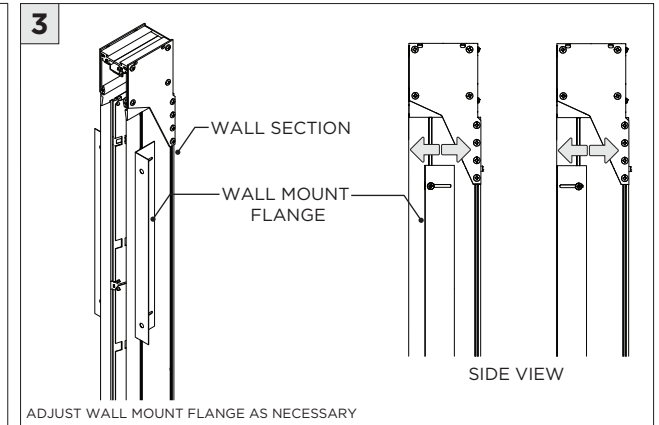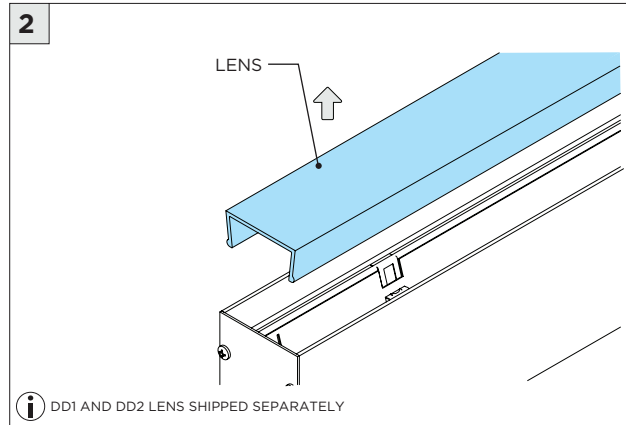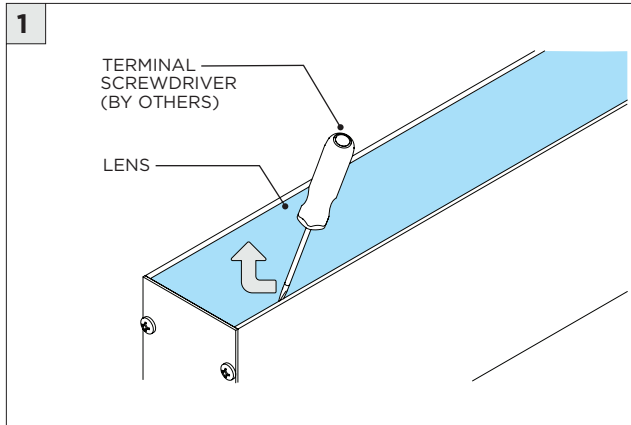


5C

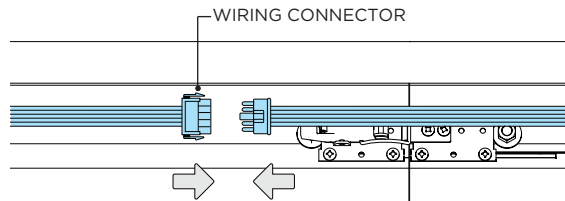


6

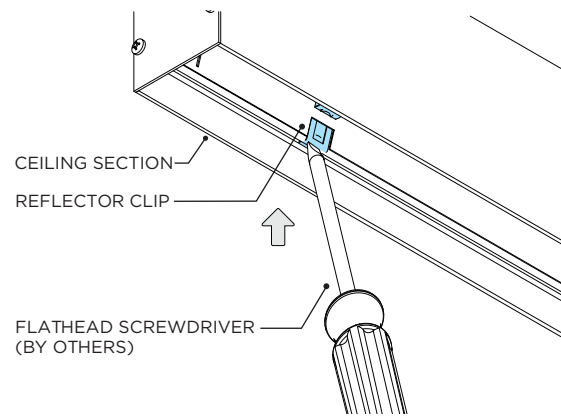


6A

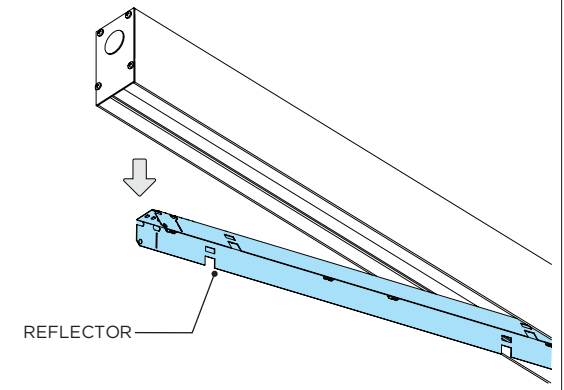

7

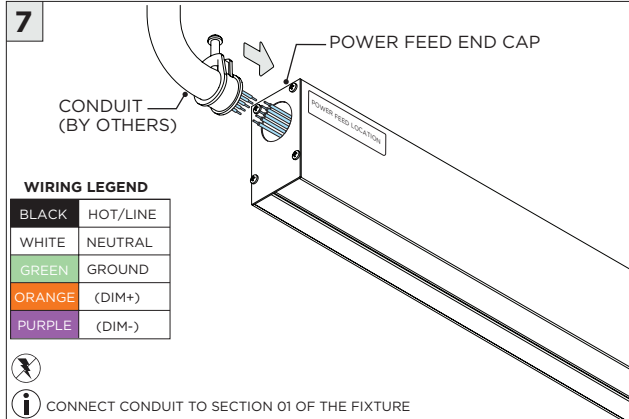


8

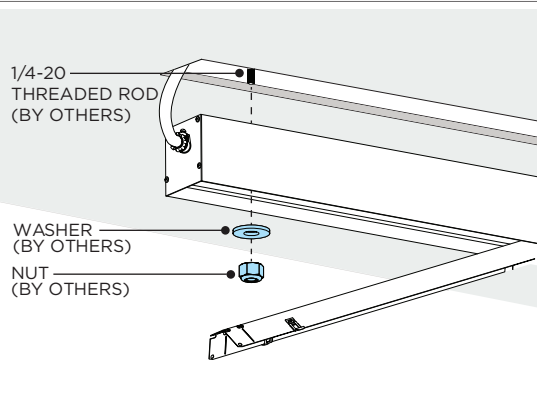


9

CONNECTING MULTIPLE SECTIONS

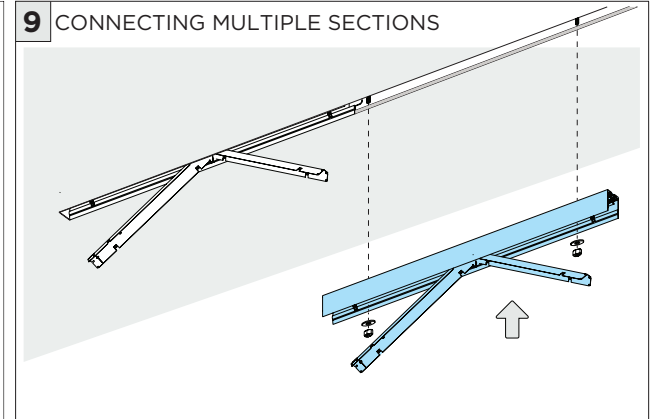


9A

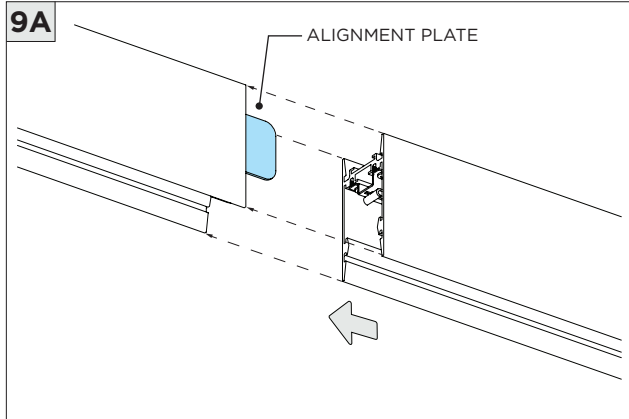


9B

HOOK & LATCH LOCATION

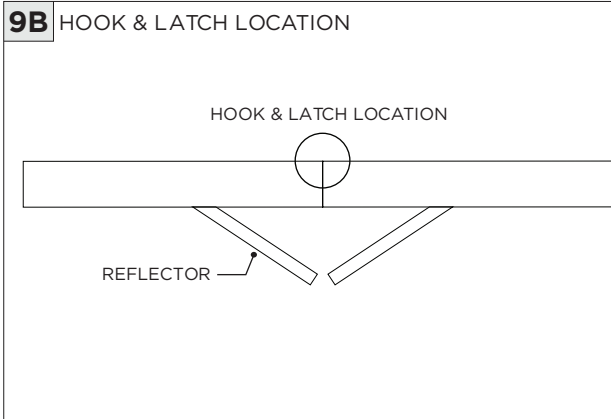


9C

MECHANISM IS NOT INTENDED TO PULL SECTIONS TOGETHER

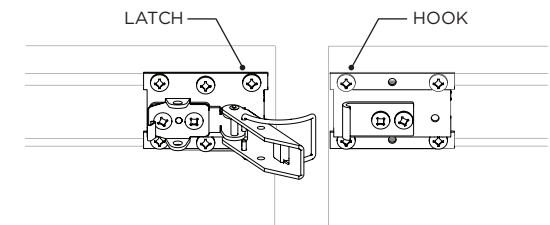


LEVEL FIXTURES BEFORE ENGAGING HOOK & LATCH MECHANISM


9D

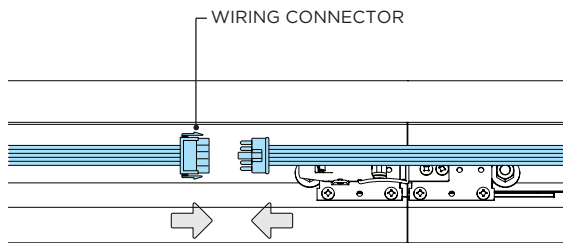


10

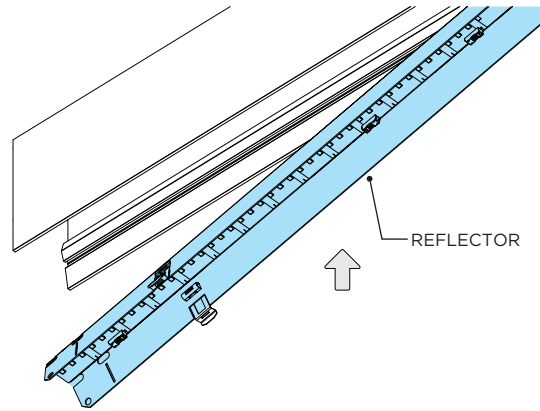

10

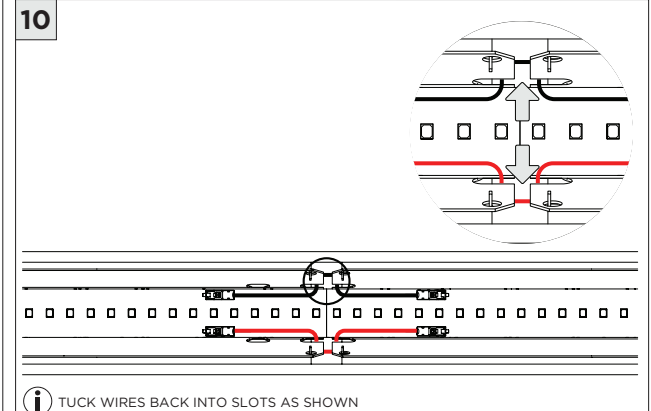


11

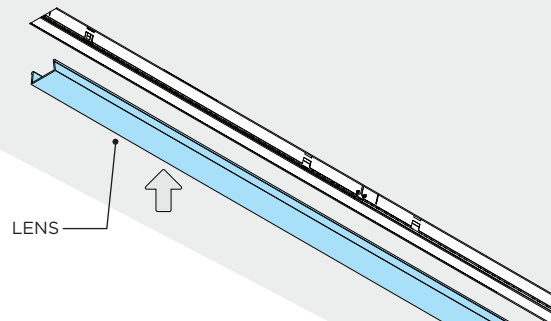


FOR ASYMMETRIC LENS SEE ASYMMETRIC LENS ORIENTATION (PAGE 3)

DRIVER SERVICING


1 FLUSH LENS REMOVAL

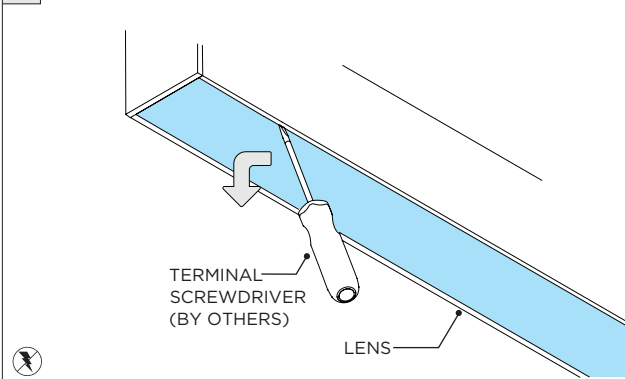


2

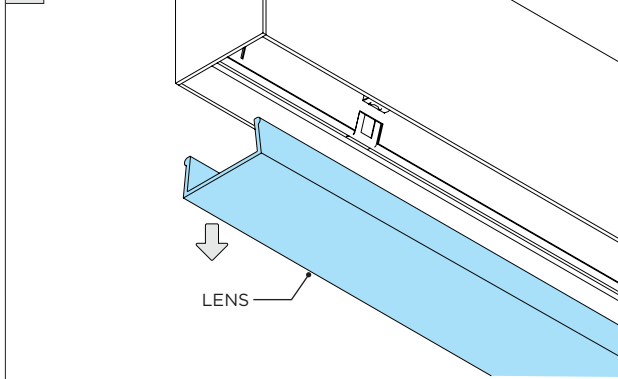


2A DROP LENS REMOVAL

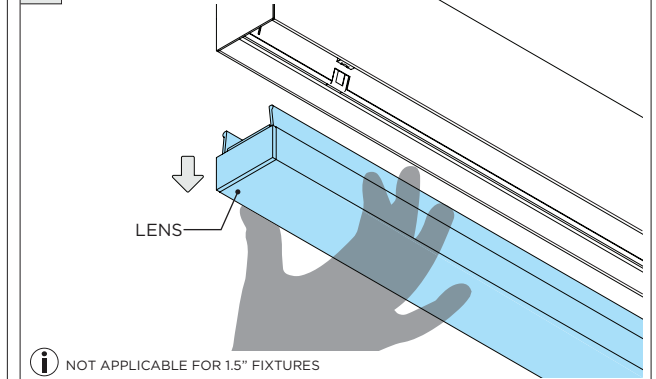


3

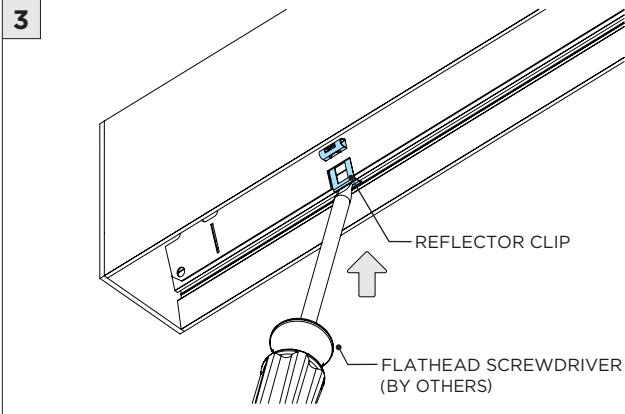


4

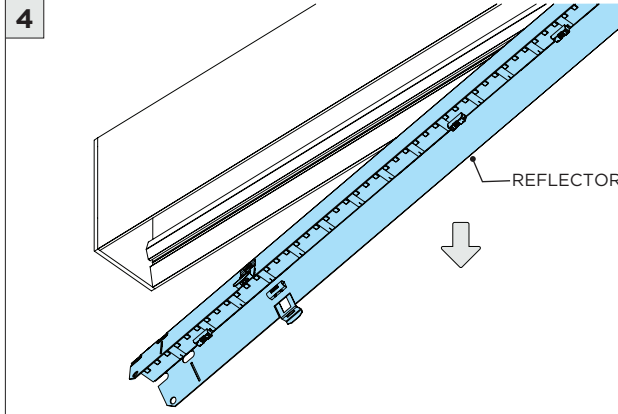


5

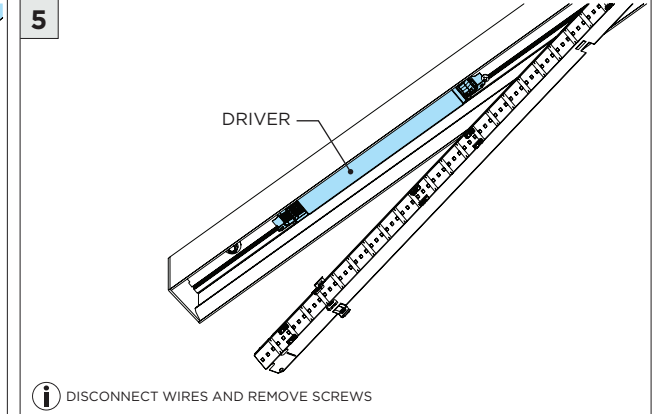


6

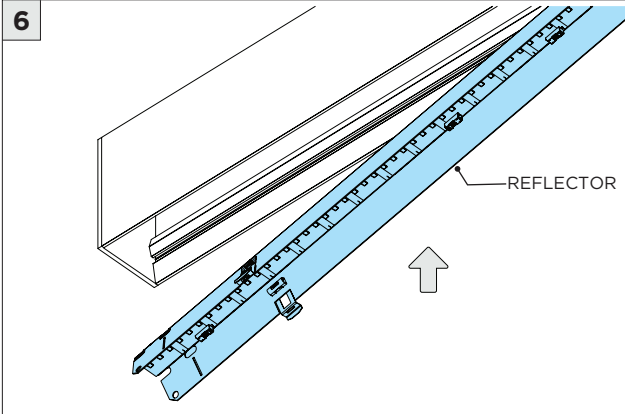










7

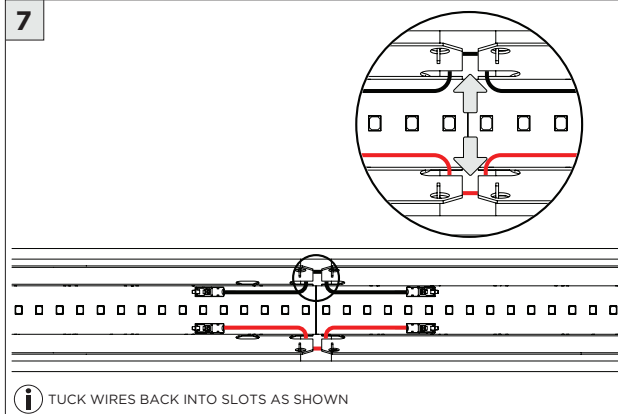

8

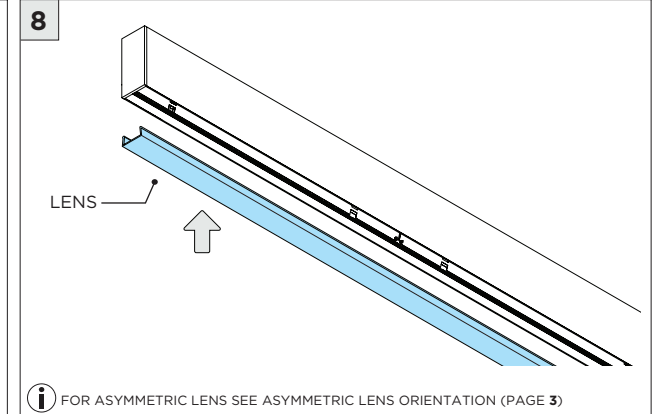


LED SERVICING

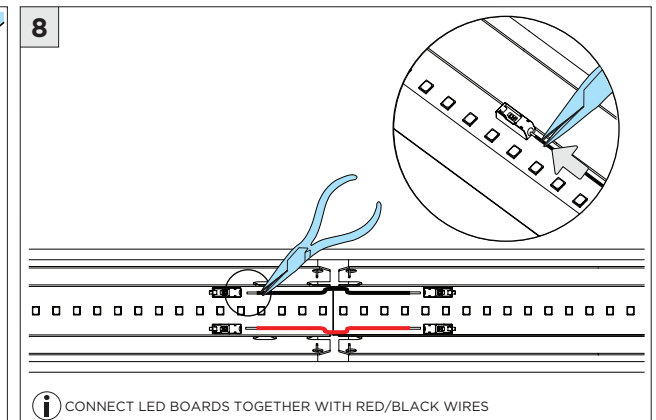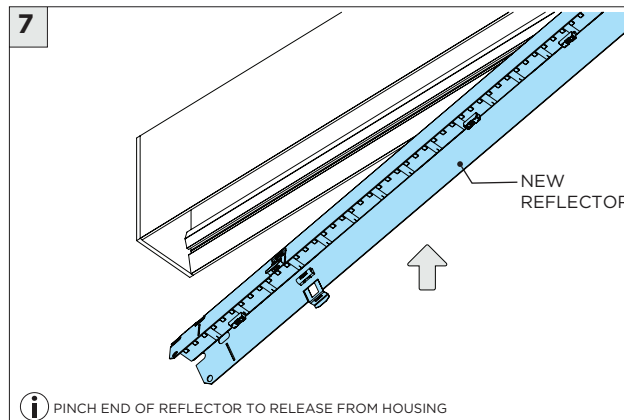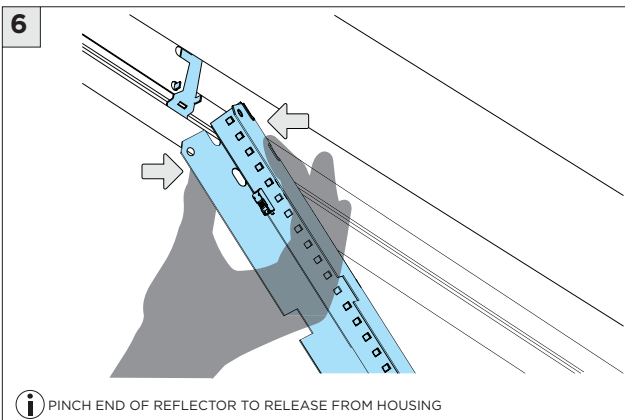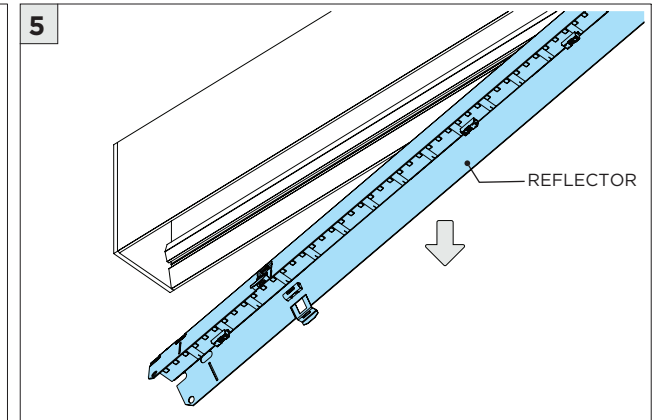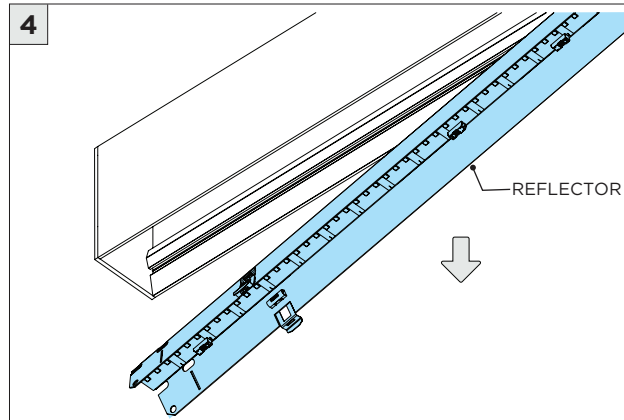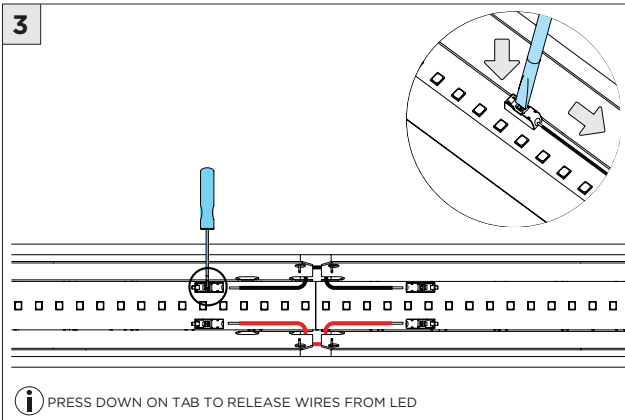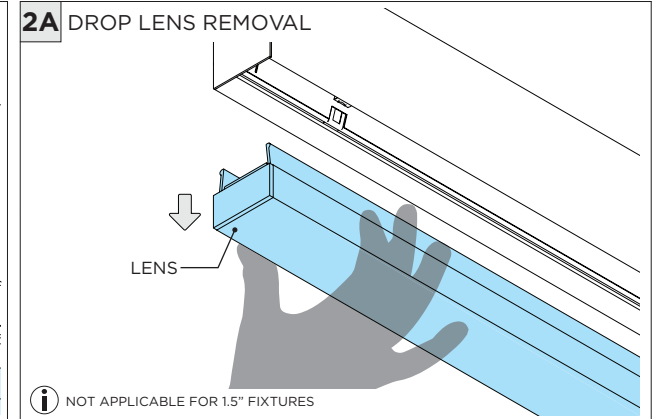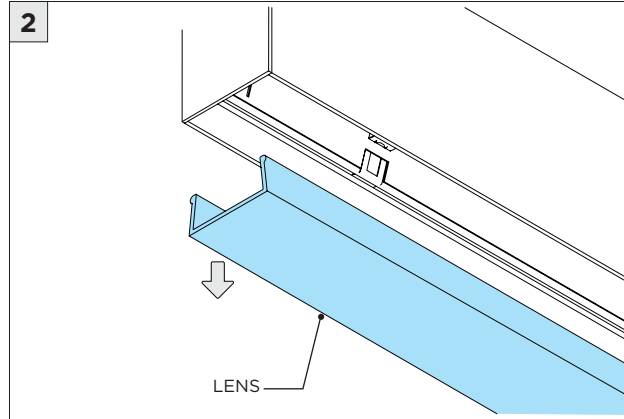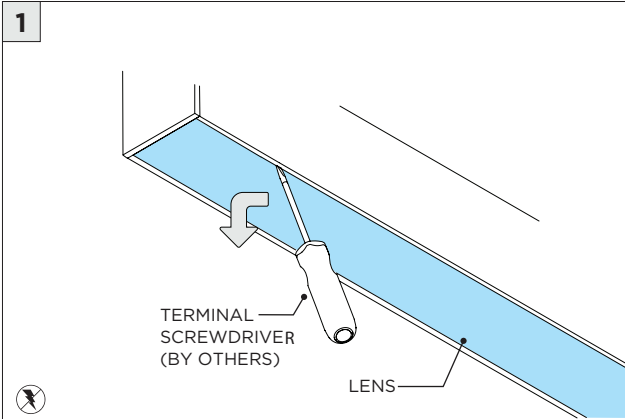

LED SERVICING

9

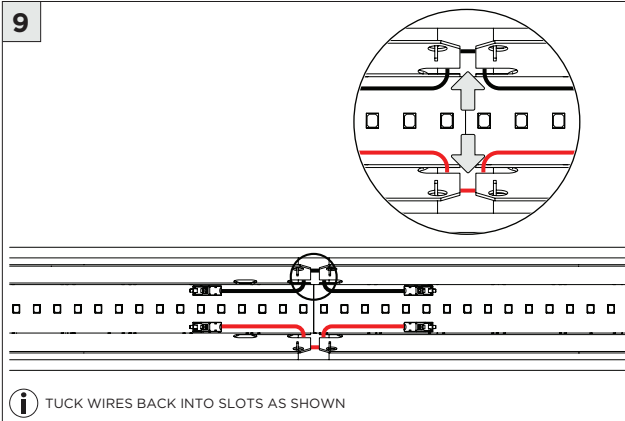

10

