




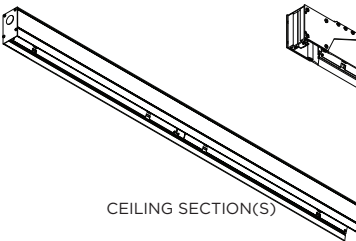


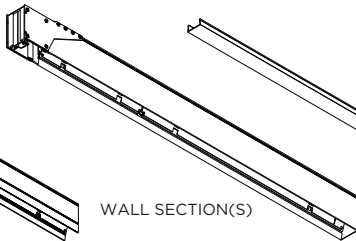

3G-1RLI-WC, 3G-2RLI-WC, and 3G-4RLI-WC
1.5", 2", and 3.5" RECESSED LINIA WALL TO CEILING
TRIMLESS FLANGE

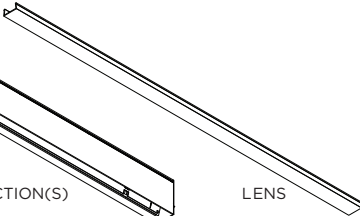



⚠ FOR **NEW CONSTRUCTION** INSTALLATION ONLY
i THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

FIXTURE TYPES			INCLUDED COMPONENTS
1RLI PROFILE 	2RLI PROFILE 	4RLI PROFILE 	 CEILING SECTION(S)  WALL SECTION(S)  LENS

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
i ATTENTION	
⚡ POWER ON	
⏻ POWER OFF	

OVERVIEW

3G-1RLI, 2RLI ,4RLI - TRIMLESS - XTR

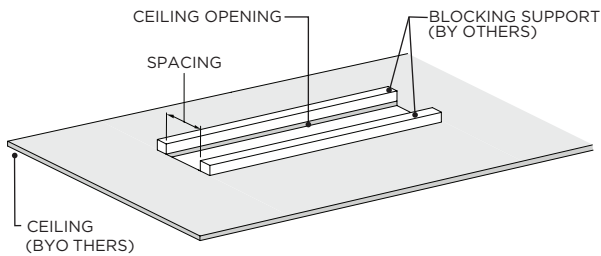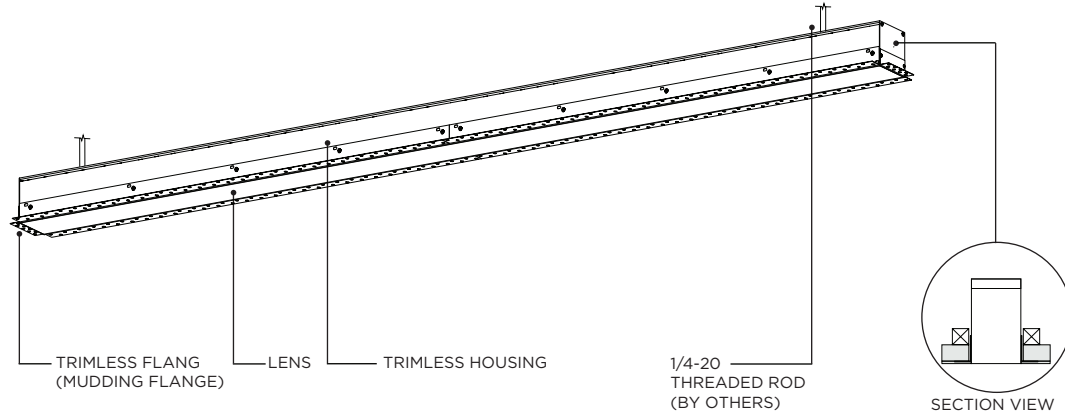


BLOCKING SUPPORT SPACING

FIXTURE TYPE	MIN. DISTANCE	MAX DISTANCE
3G-1RLI	2.25"	2.55"
3G-2RLI	2.50"	2.80"
3G-4RLI	3.96"	4.26"

INSTALLATION INSTRUCTIONS


TRIMLESS - XTR - CEILING SECTION

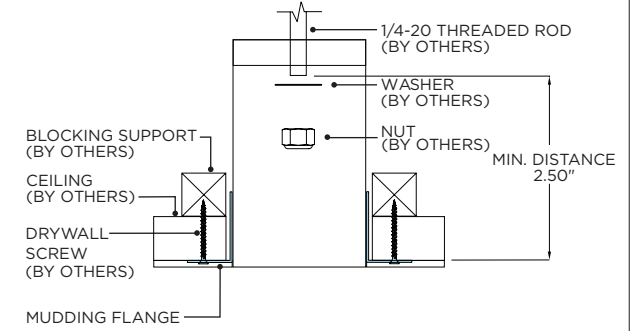

TRIMLESS - XTR - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-1RLI	2.250"	LENGTH + 0.500"
3G-2RLI	2.500"	LENGTH + 0.500"
3G-4RLI	3.930"	LENGTH + 0.500"

TRIMLESS - XTR - WALL SECTION

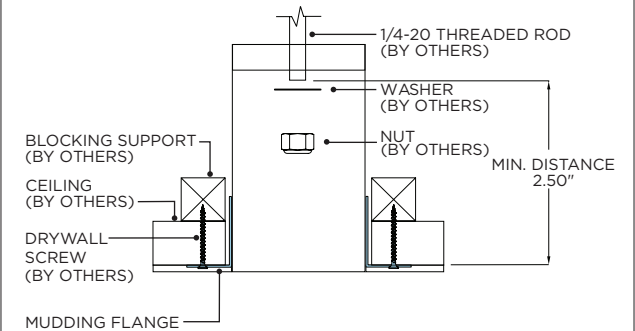


TRIMLESS - XTR - WALL CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3G-1RLI	2.250"	LENGTH + 0.500"
3G-2RLI	2.500"	LENGTH + 0.500"
3G-4RLI	3.930"	LENGTH + 0.500"


ASYMMETRIC LENS ORIENTATION

3G-1RLI, 3G-2RLI-ASYMMETRIC LENS


ROOM SIDE DISTRIBUTION

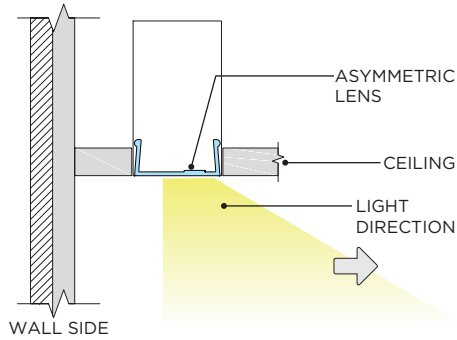


ASYMMETRIC LENS



WALL GRAZING DISTRIBUTION

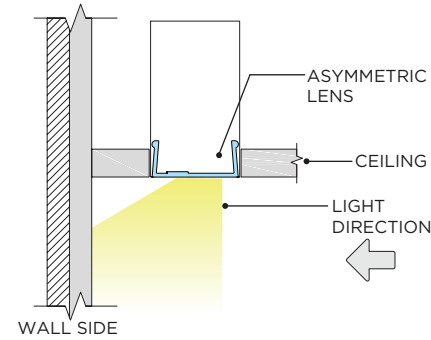


ASYMMETRIC LENS




3G-4RI-ASYMMETRIC LENS/REFLECTOR ORIENTATION


ROOM SIDE DISTRIBUTION

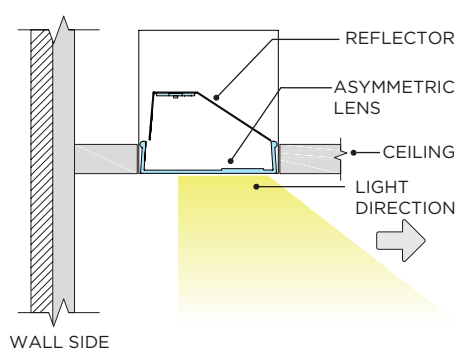


ASYMMETRIC LENS



WALL GRAZING DISTRIBUTION

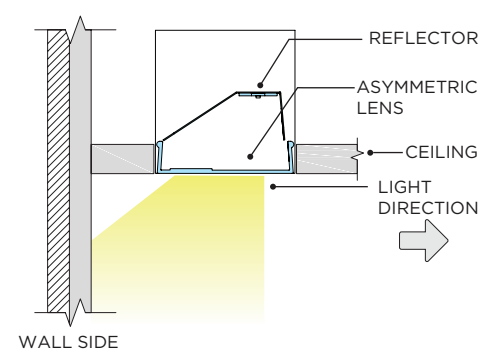

ASYMMETRIC LENS



ID LABEL

SECTION: **01 OF 03**
TYPE: **XX XX** CO-0000




STARTER

JOINER

ENDER

THREADED ROD LOCATION

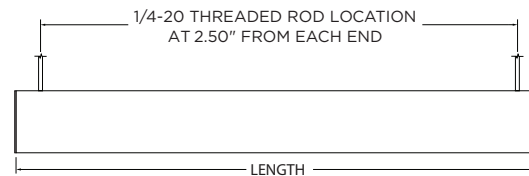

THREADED ROD LOCATION

3'	31"	6'	67"
4'	43"	7'	79"
5'	55"	8'	91"










IDENTIFICATION AND PREPARATION










ID LABEL






SECTION: **01 OF 03**
TYPE: **XX XX** CO-0000

ORDER TYPE ORDER NUMBER SECTION ID NUMBER

i IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS

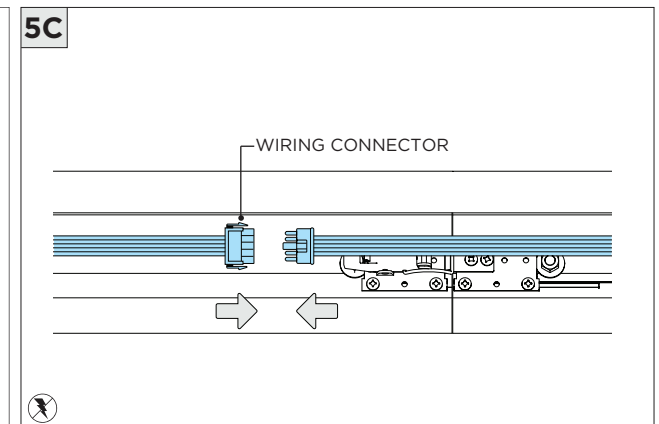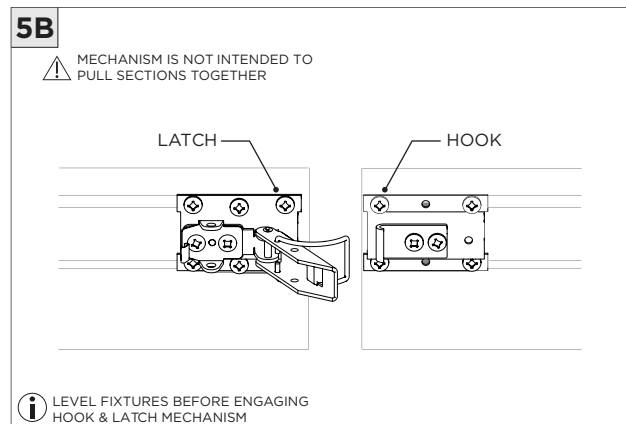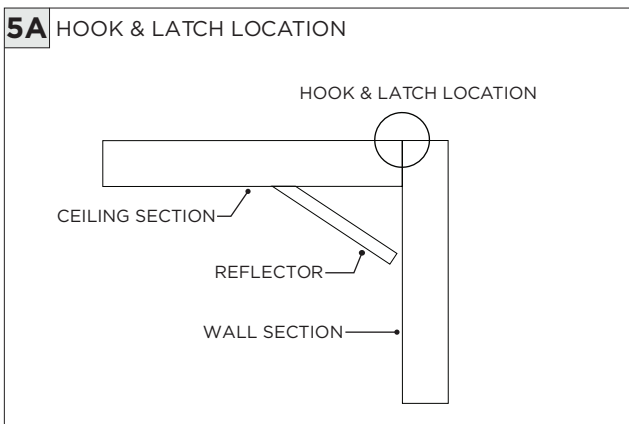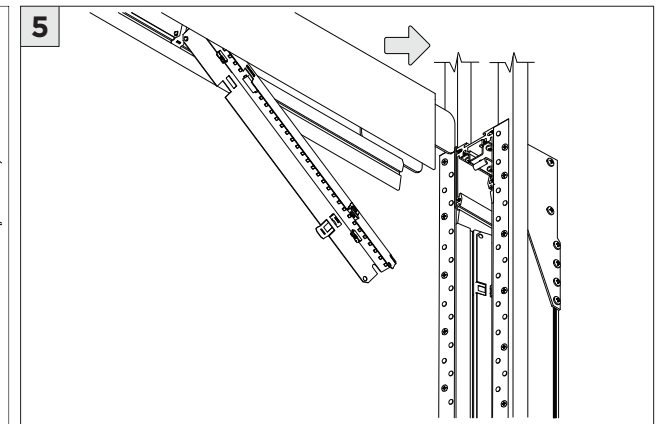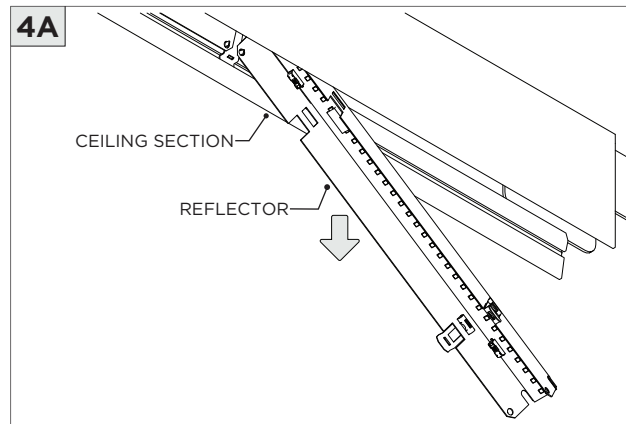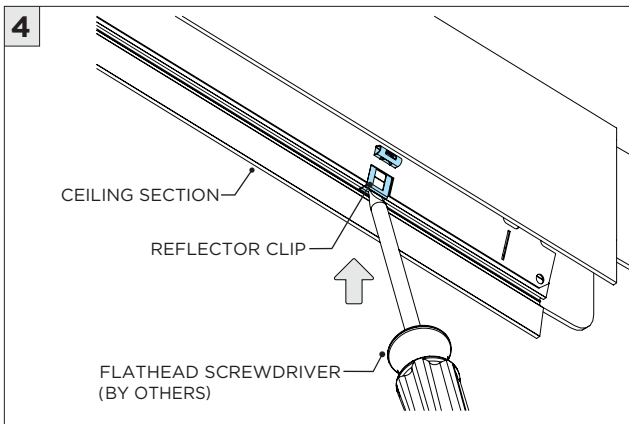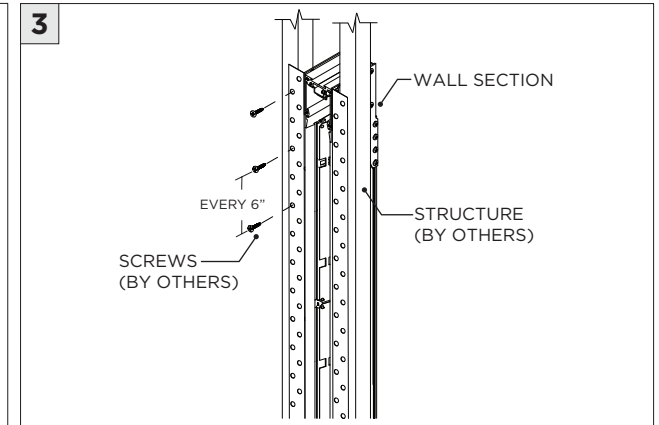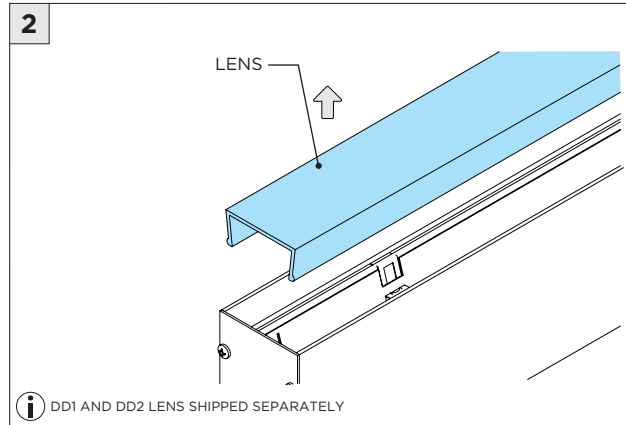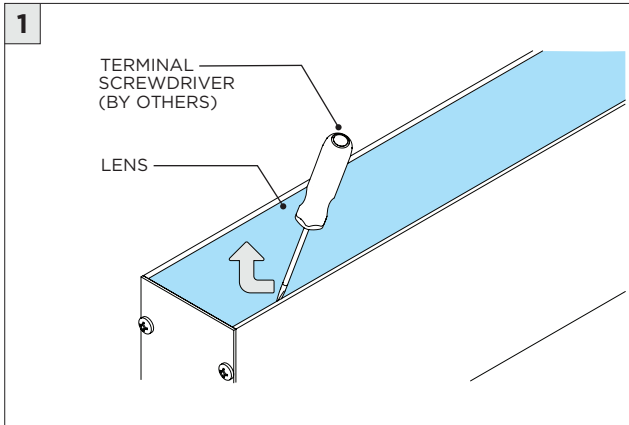


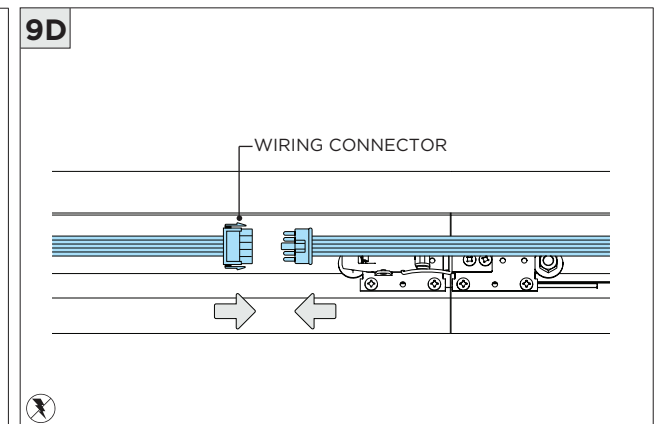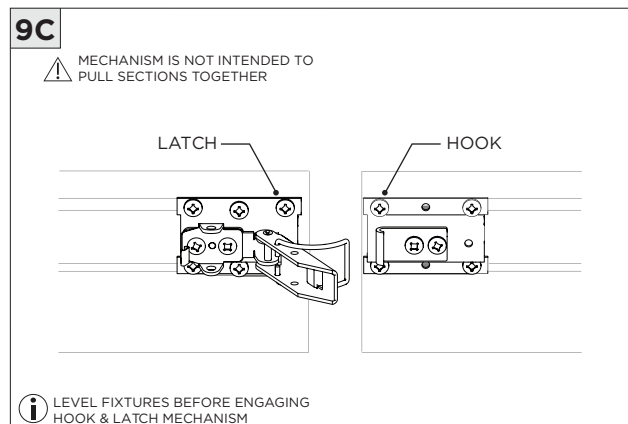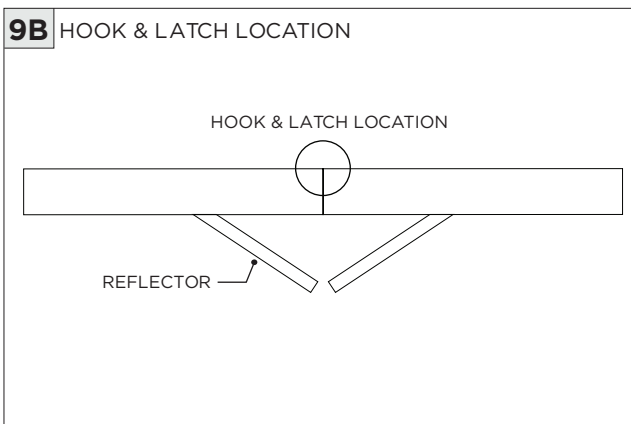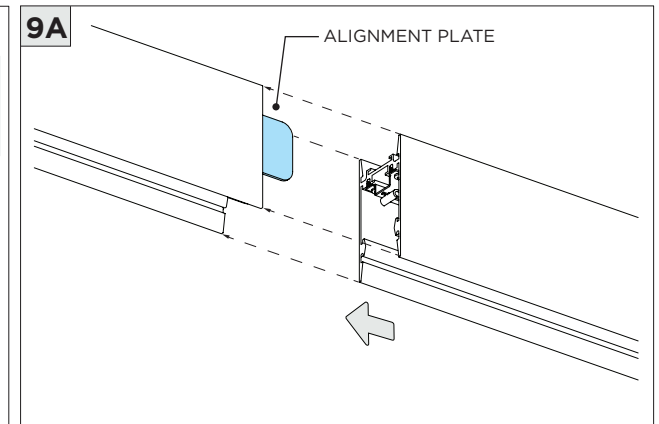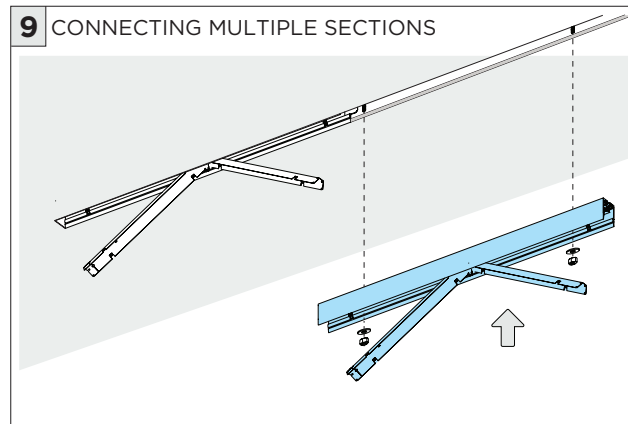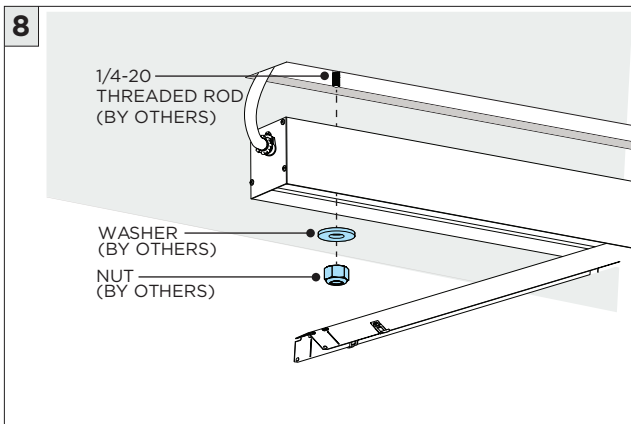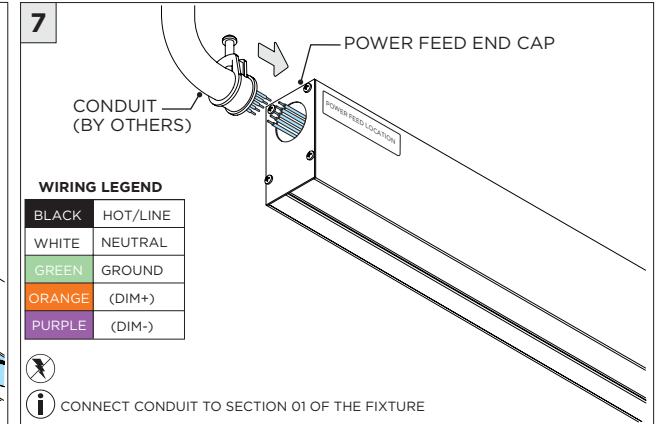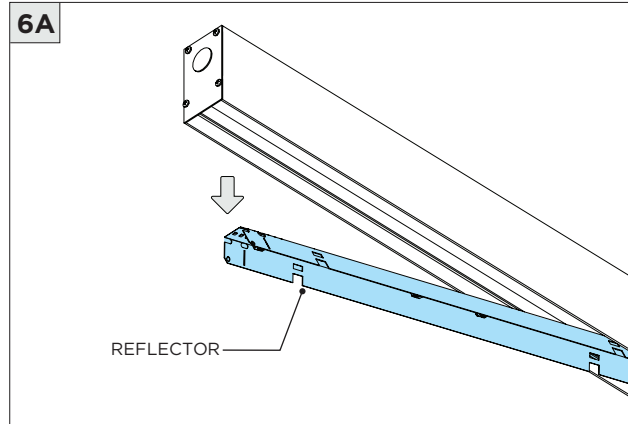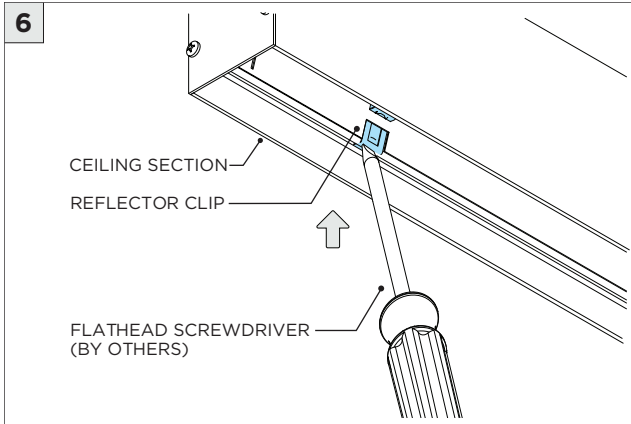

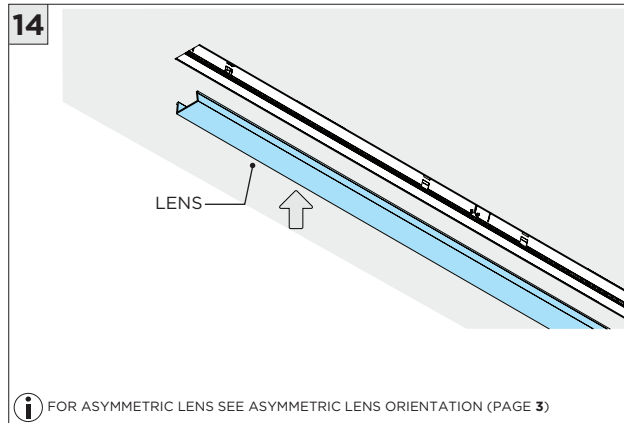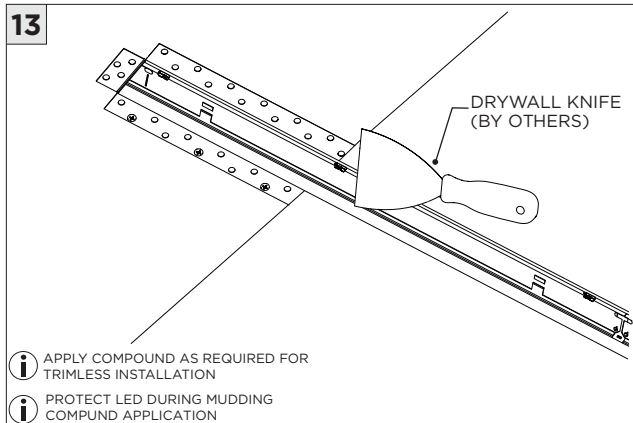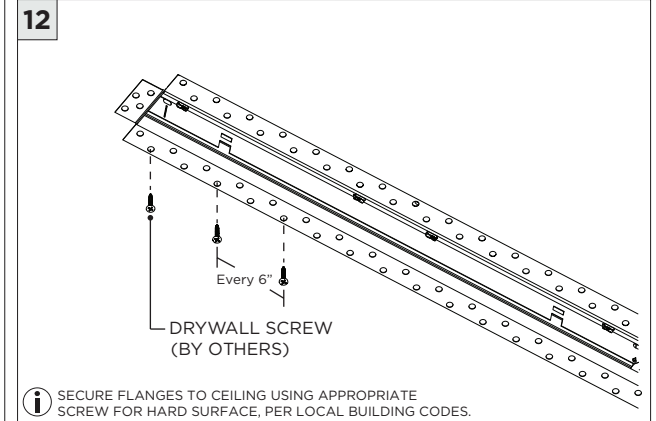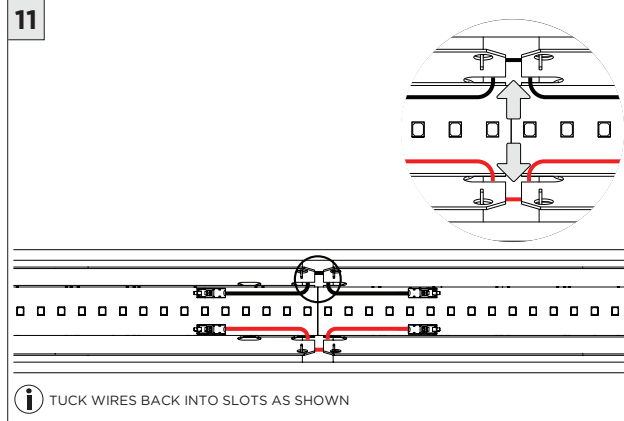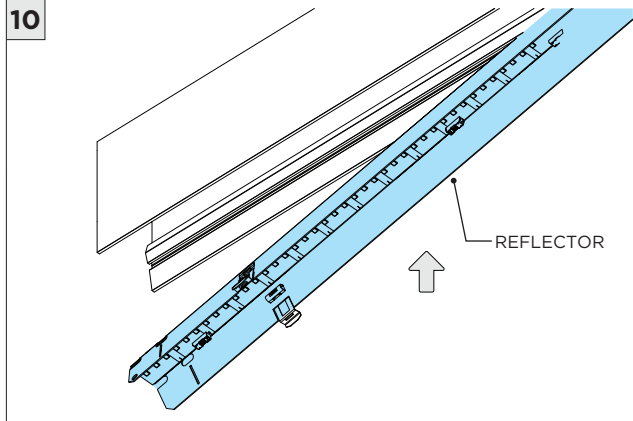


DRIVER SERVICING


1 FLUSH LENS REMOVAL

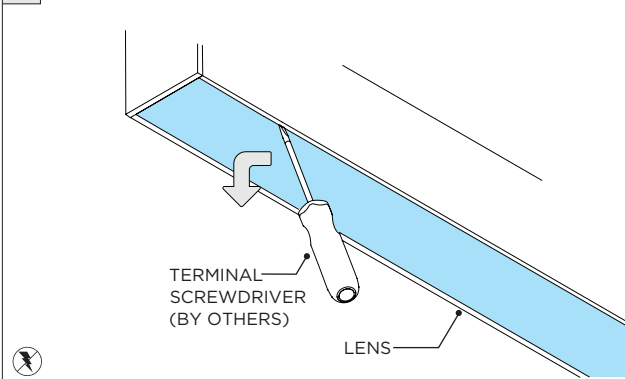


2

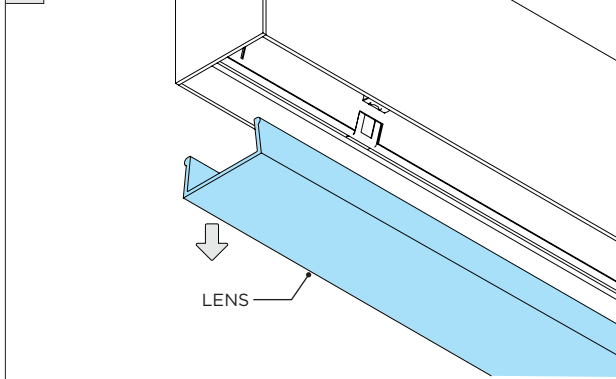


2A DROP LENS REMOVAL

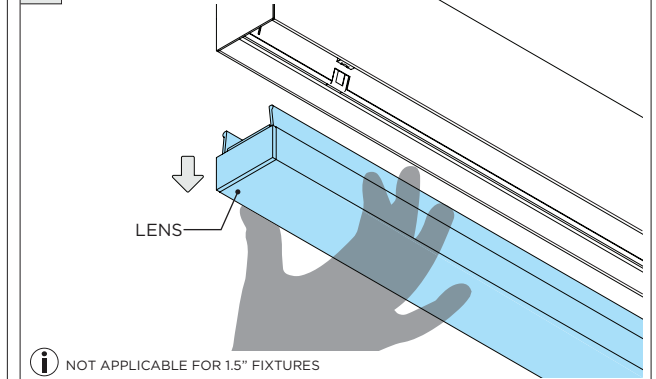


3

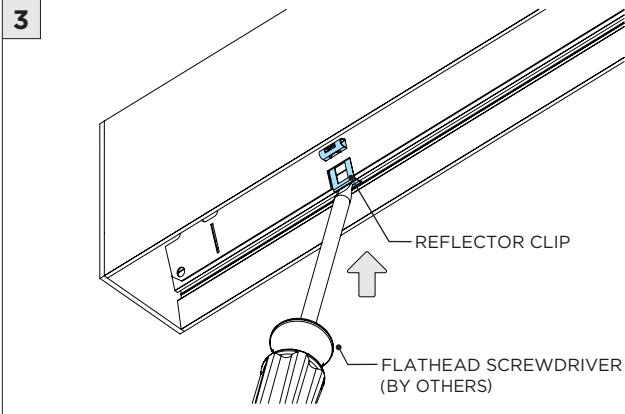


4

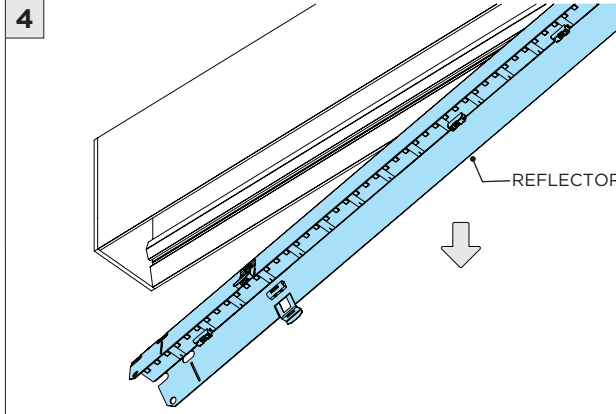


5

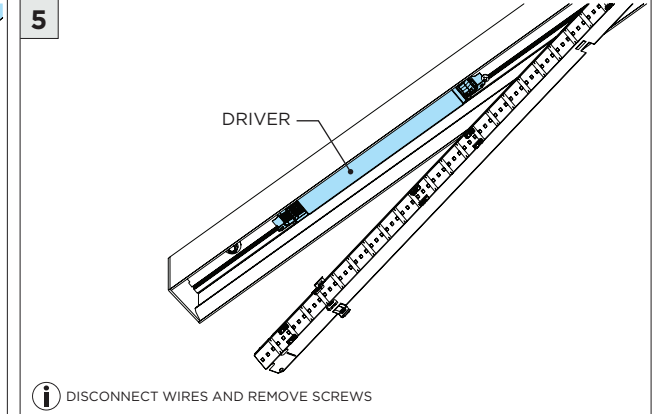


6

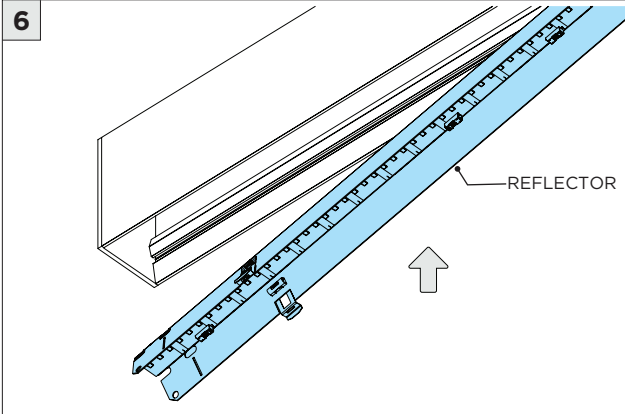










7

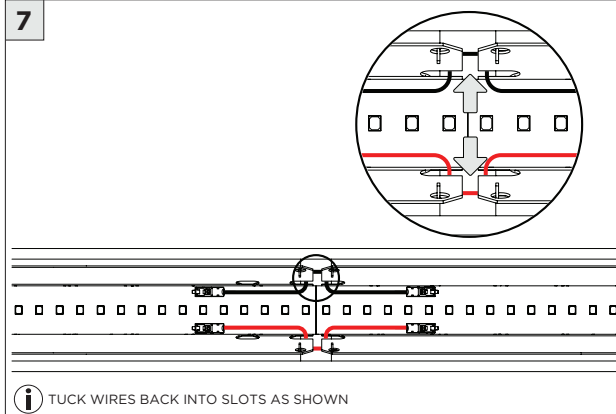

8

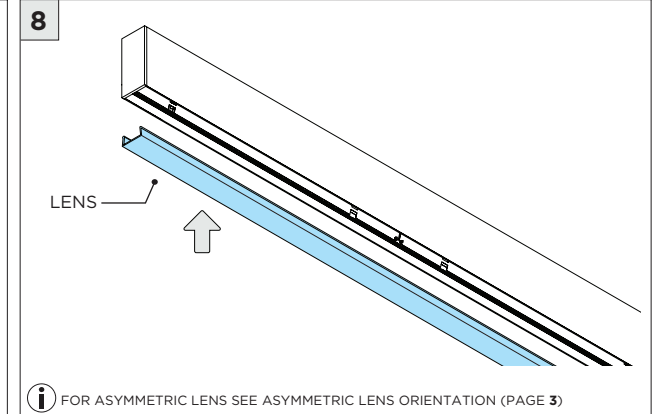


LED SERVICING

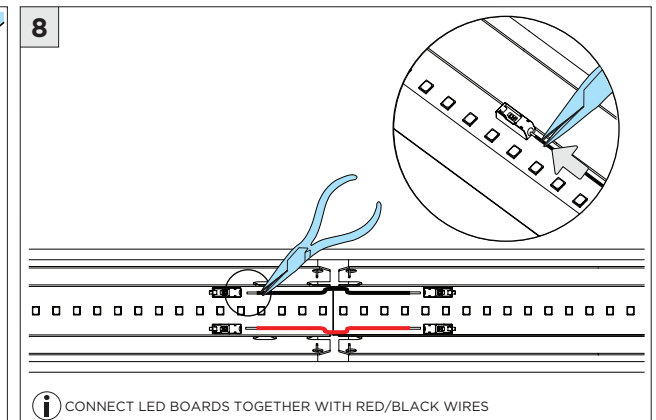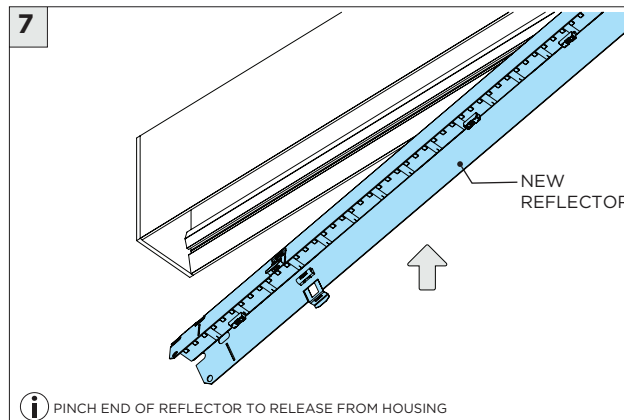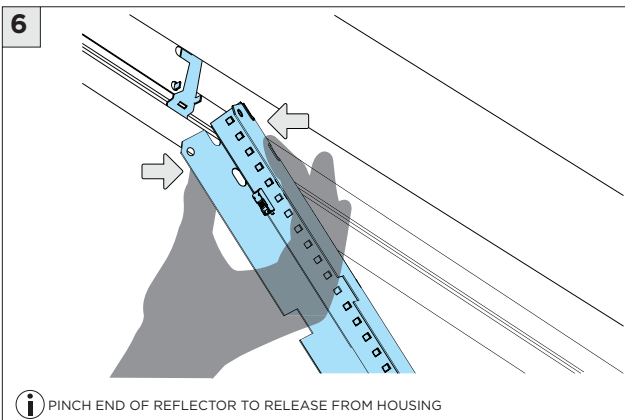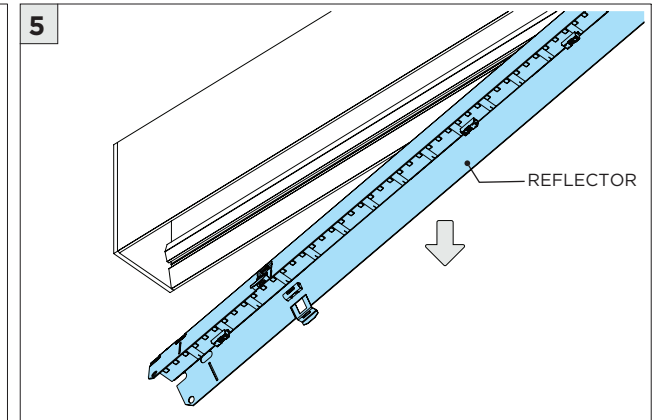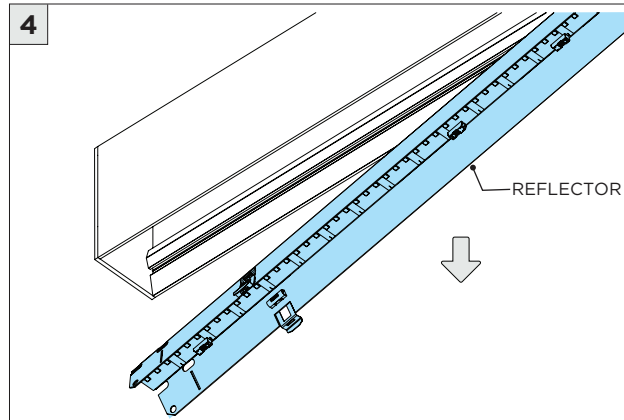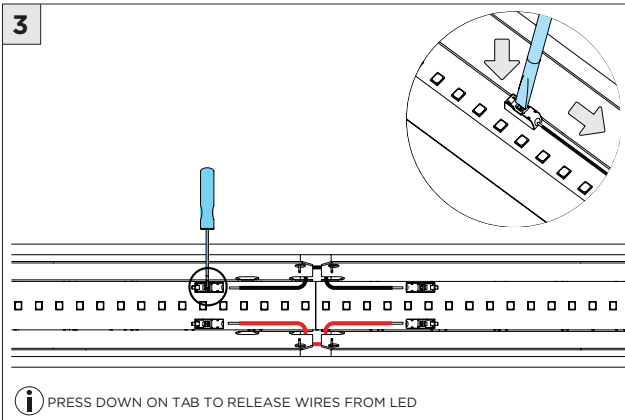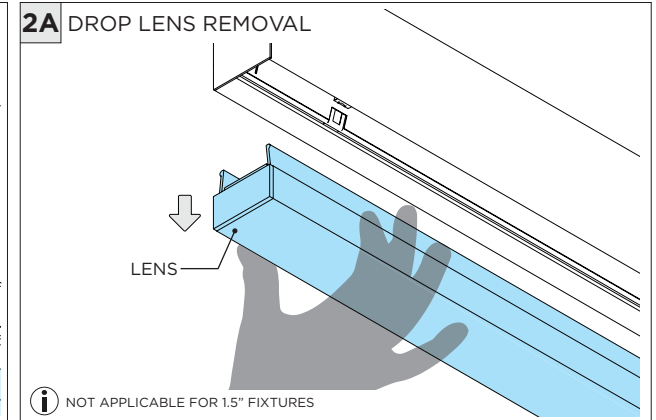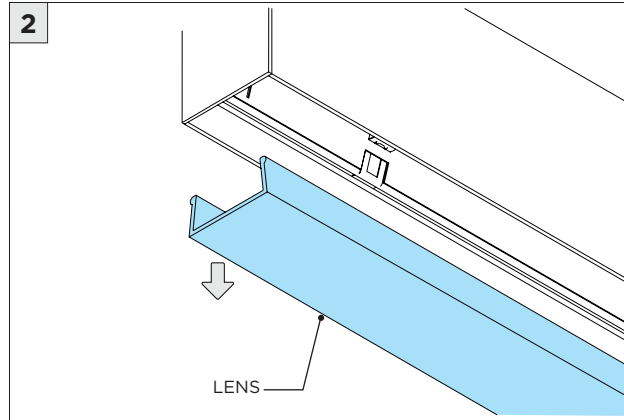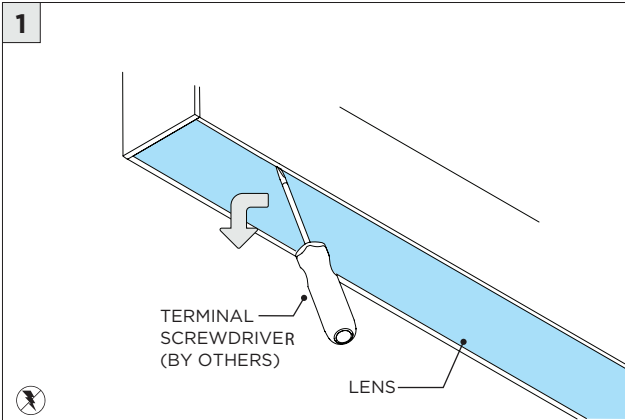

LED SERVICING

9

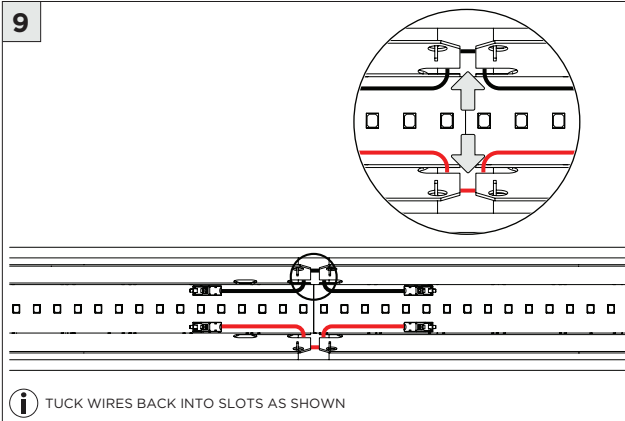

10

