


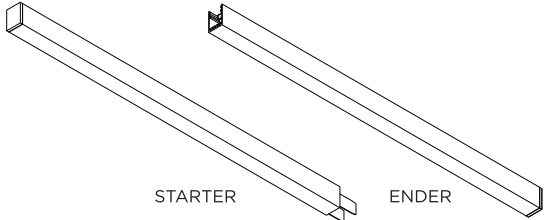
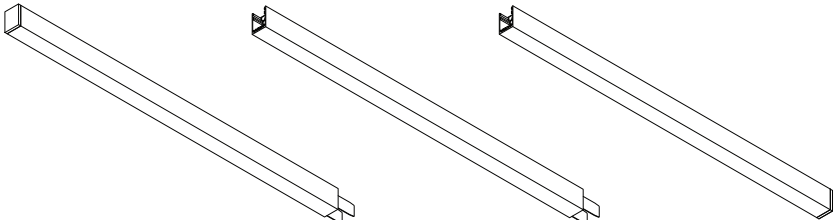






FIXTURE TYPES		INCLUDED COMPONENTS	
3G-1PLI-I PROFILE 		Standalone Fixture (2' to 8')  STANDALONE	Continuous Runs (9' to 16')  STARTER ENDER
Continuous Runs (17' and longer)  STARTER JOINER ENDER		Power feed kit  	Non - Power feed kit   FOR GRID CEILING APPLICATION 


INSTRUCTION KEY	INFORMATION
 ADDITIONAL  ATTENTION  POWER ON  POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

OVERVIEW


3G-1PLI - DRYWALL SUSPENSION

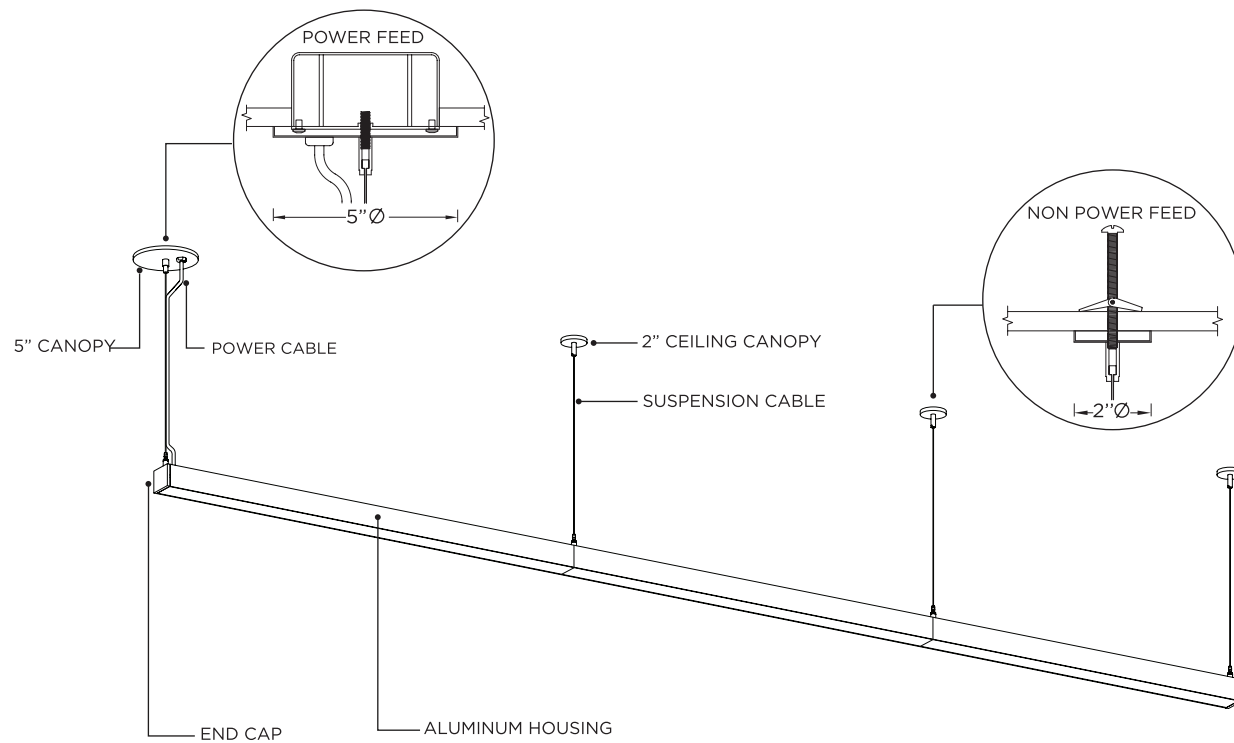


POWER FEED SUSPENSION

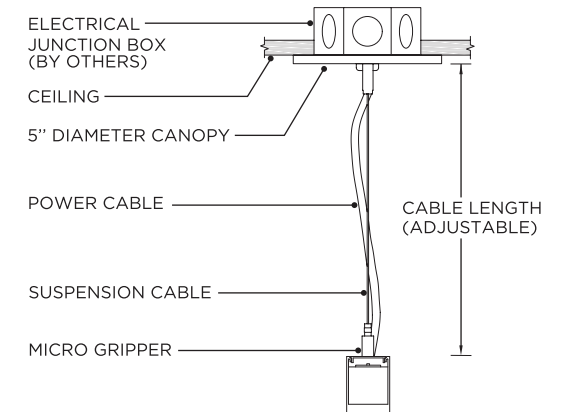


NON - POWER FEED SUSPENSION

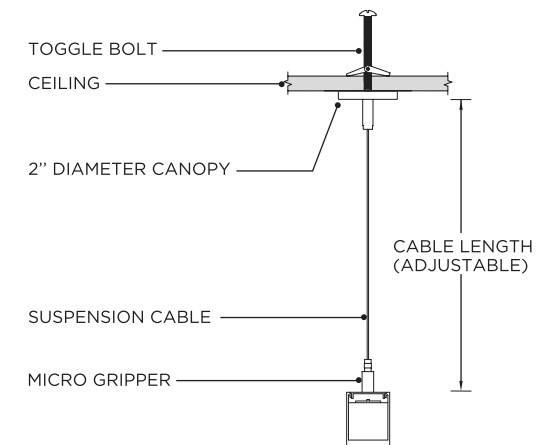


3G-1PLI - GRID CEILING - GCX

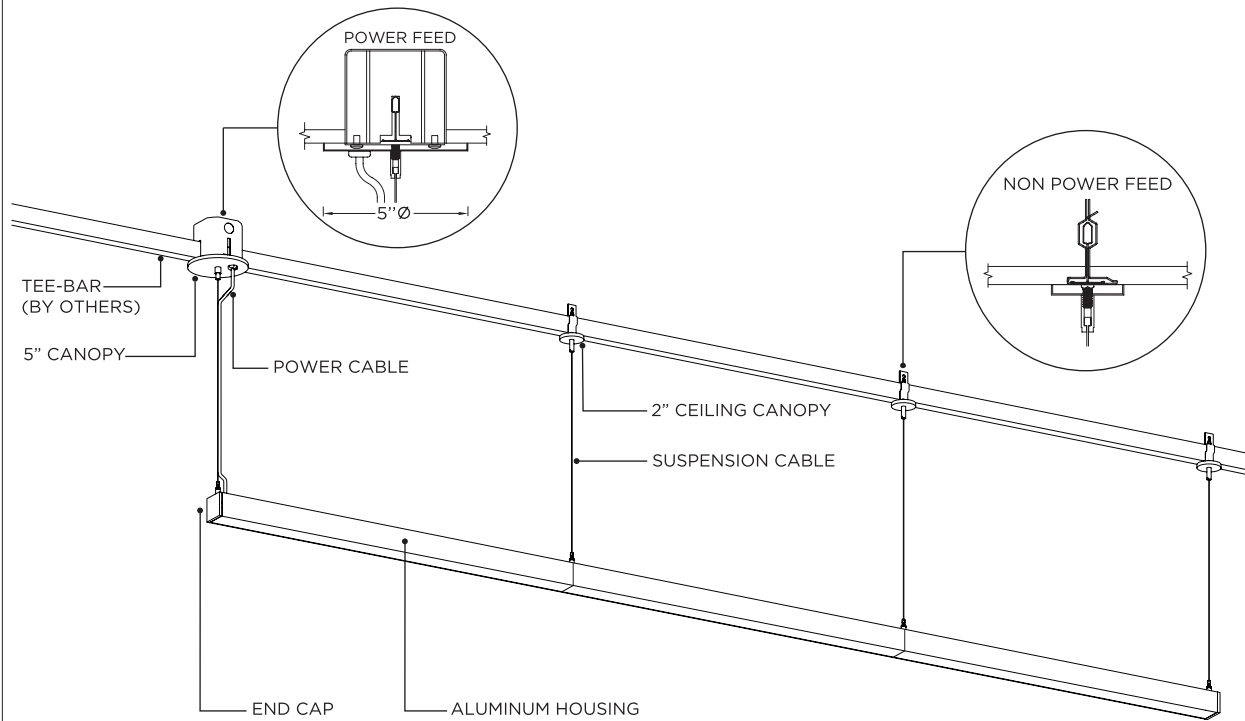

POWER FEED SUSPENSION


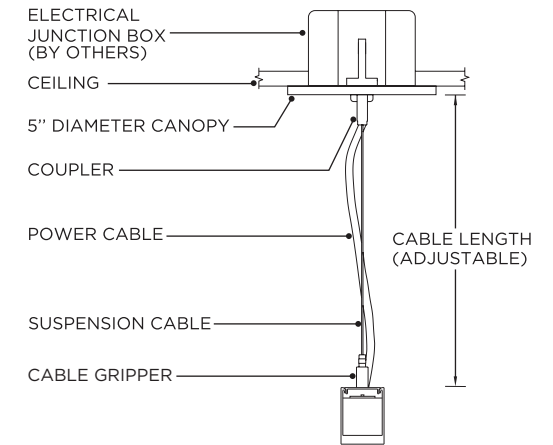


NON - POWER FEED SUSPENSION

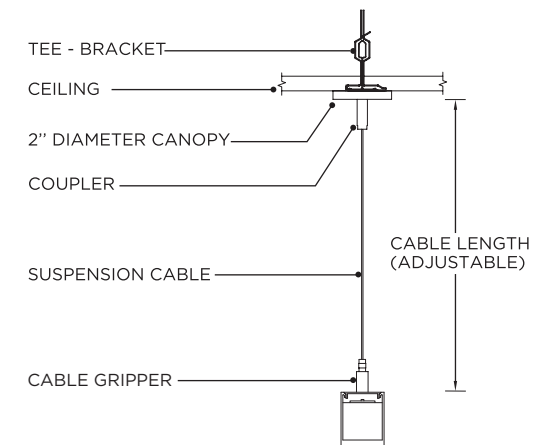

ASYMMETRIC OPTIC ORIENTATION


3G-1PLI-I-ASYMMETRIC OPTIC

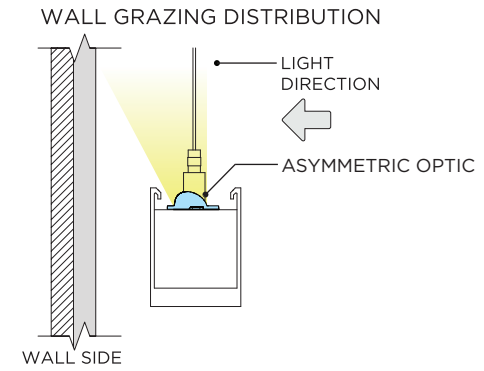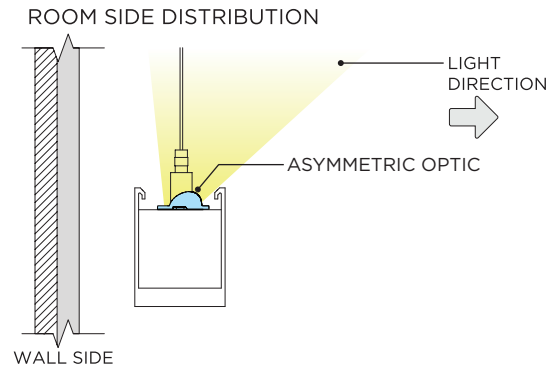

SUSPENSION CABLE LOCATION


STANDALONE

STANDALONE
AT 0.25" FROM EACH END OF LENGTH

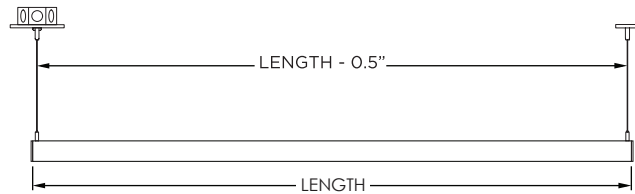

STARTER, JOINER, and ENDER

STARTER/JOINER/ENDER
AT 0.125" FROM EACH END OF SECTION LENGTH

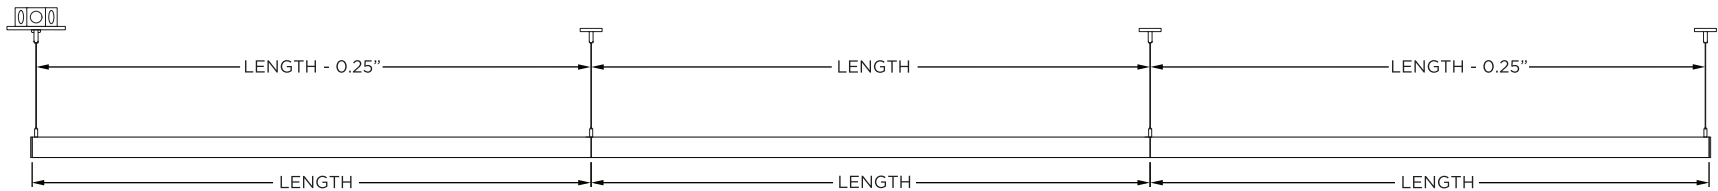

IDENTIFICATION AND PREPARATION

ID LABEL

TYPE: **XX XX**
ID: **01 OF 03** CO-0000

SECTION ID NUMBER ORDER NUMBER ORDER TYPE

 IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS

ID LABEL

SECTION: **01 OF 03**
TYPE: **XX XX** CO-0000




STARTER

JOINER


ENDER

1 DRYWALL SUSPENSION

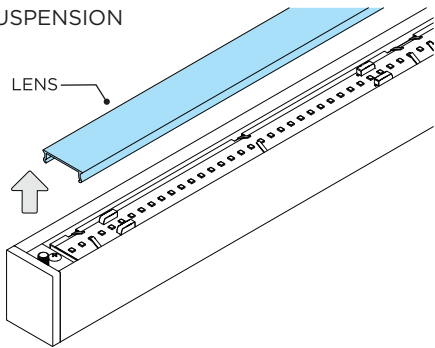


i ASYMMETRIC & WIDESPREAD OPTIC DO NOT INCLUDE LENS

2

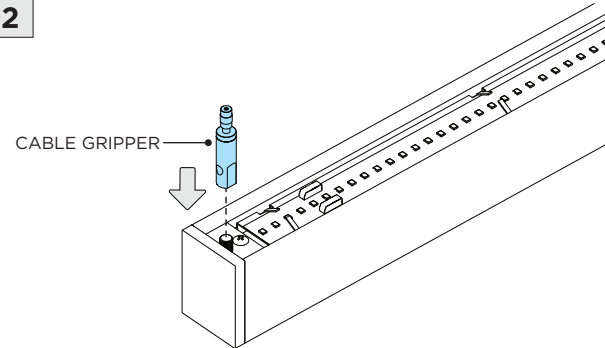


SECURE CABLE GRIPPER TO BOTH ENDS OF SECTIONS


3 POWER FEED

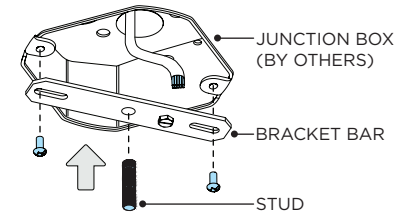


3A

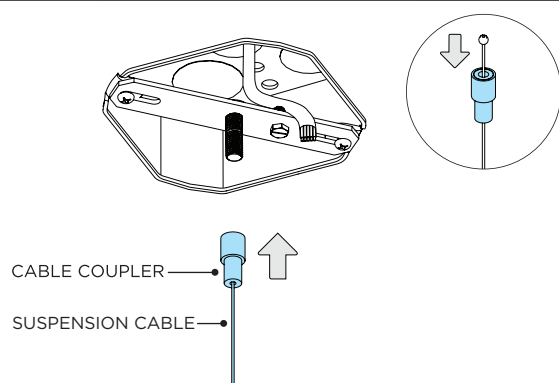


4 NON-POWER FEED

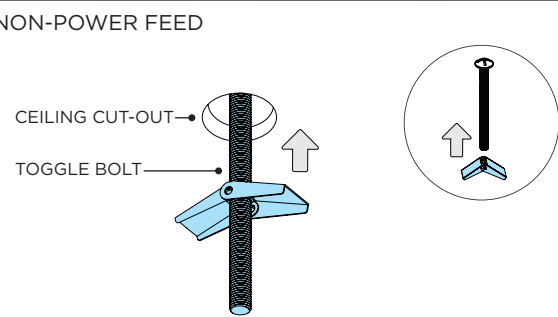

4A

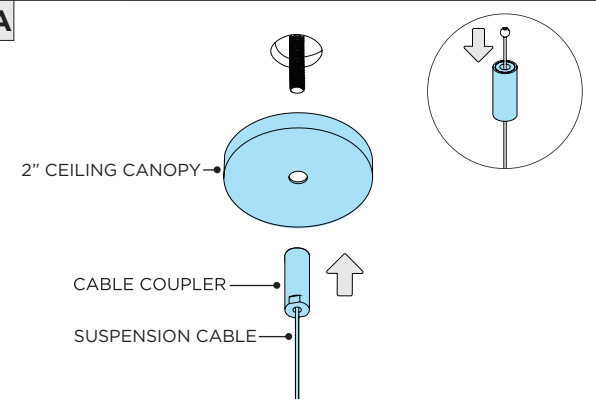


5

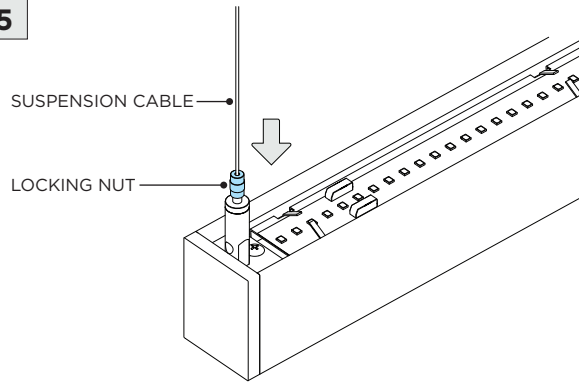


ADJUST CABLE LENGTH AND LOCK IN PLACE WITH LOCKING NUT

5A

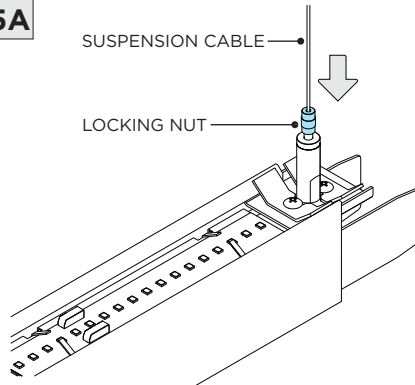


6

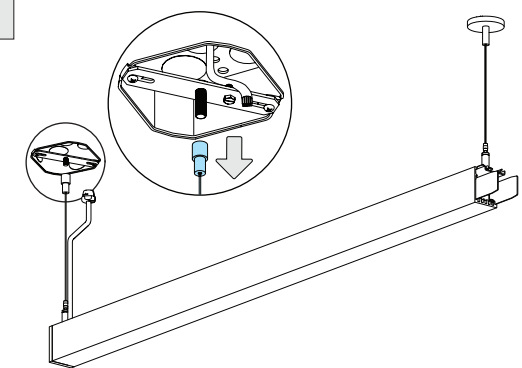

i SUPPORT FIXTURE FROM BELOW


6A ELECTRICAL CONNECTIONS

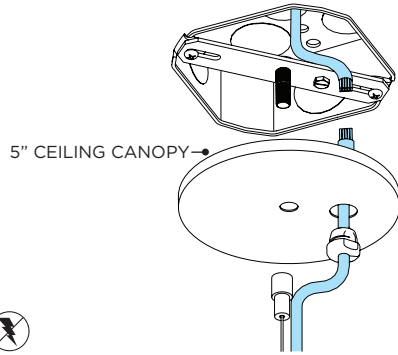

WIRING LEGEND	
BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM+)
PURPLE	(DIM-)


RGBW WIRING LEGEND	
GREEN	GROUND
BLACK	LINE
WHITE	NEUTRAL
ORANGE	DMX SHIELD
PURPLE	DMX -
PURPLE	DMX +

7

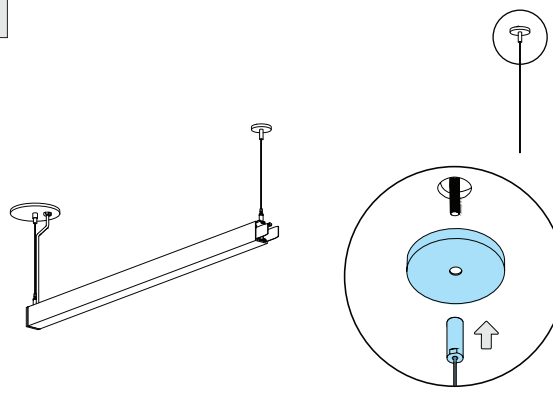


REPEAT STEP 4 & 5 FOR JOINER SUSPENSION


8

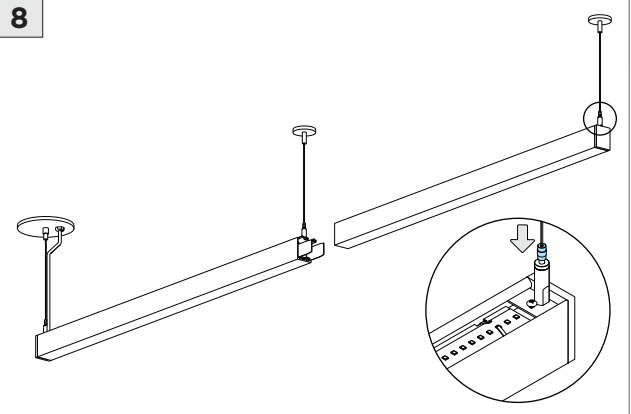

9

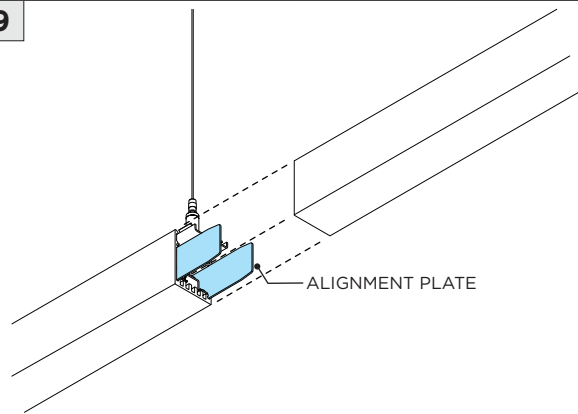


10

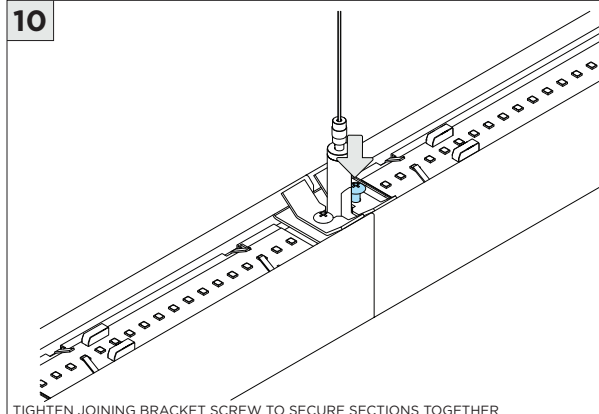

TIGHTEN JOINING BRACKET SCREW TO SECURE SECTIONS TOGETHER


11

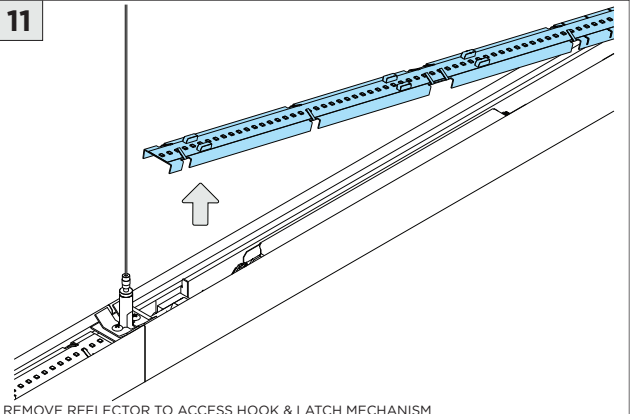

REMOVE REFLECTOR TO ACCESS HOOK & LATCH MECHANISM


12

⚠ MECHANISM IS NOT INTENDED TO PULL SECTIONS TOGETHER

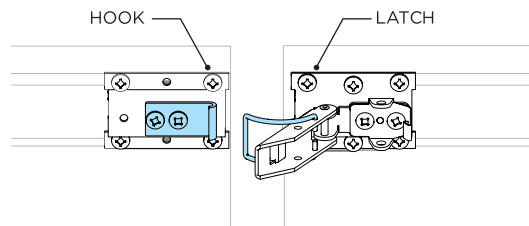











ⓘ LEVEL FIXTURES BEFORE ENGAGING HOOK & LATCH MECHANISM










13

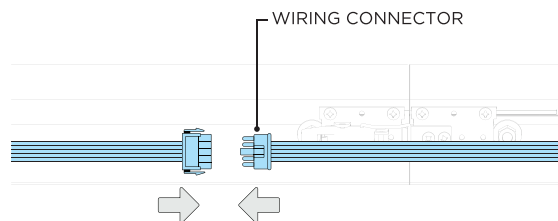




14

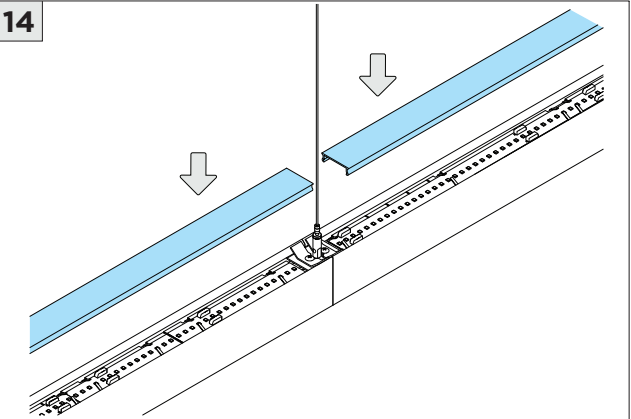

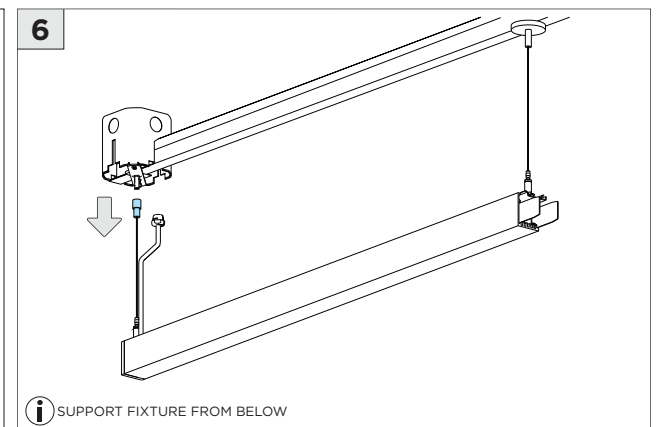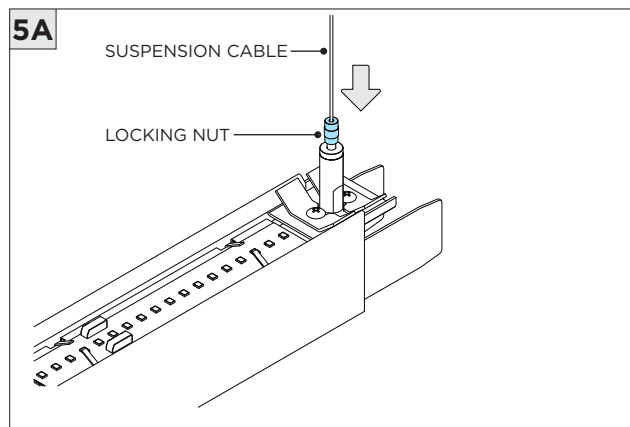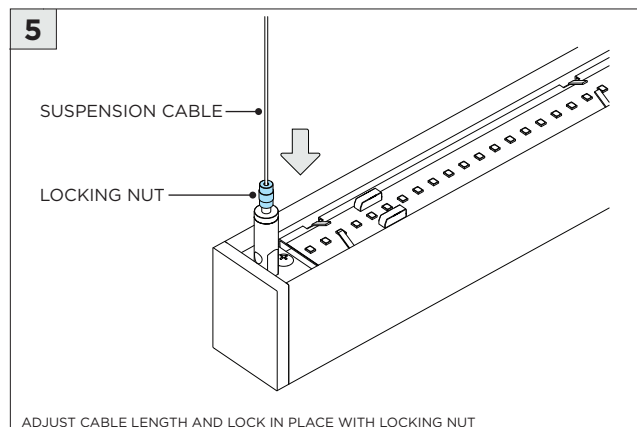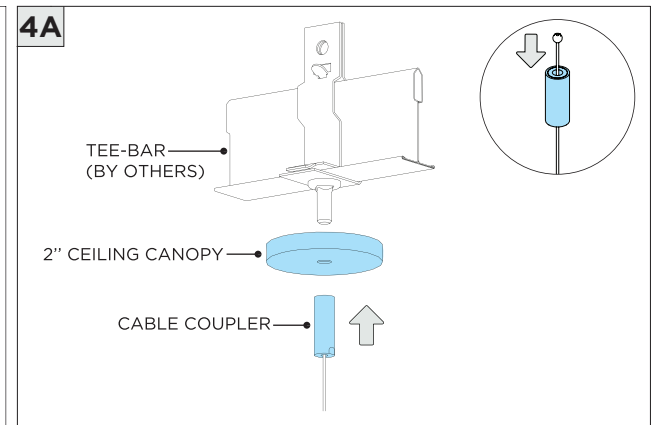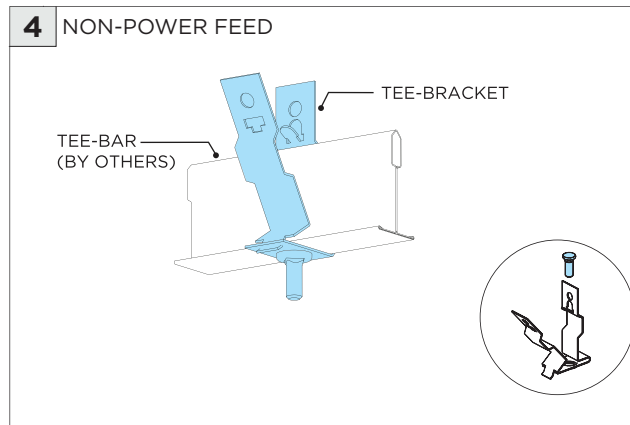
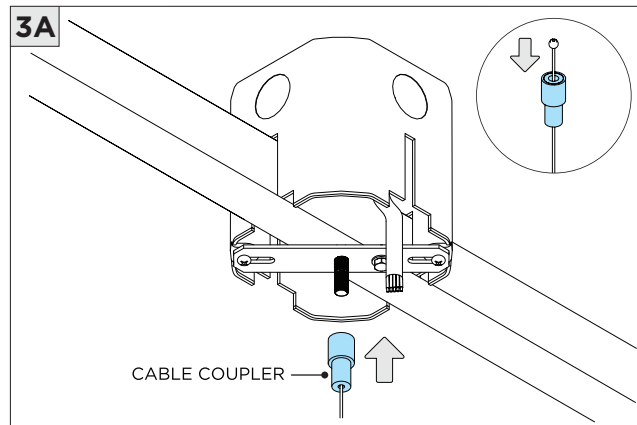
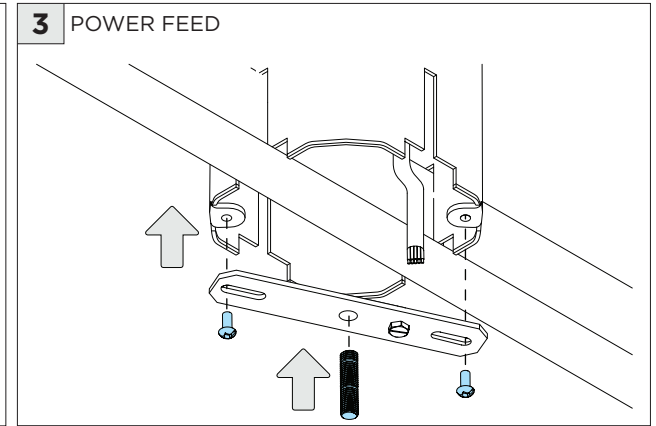
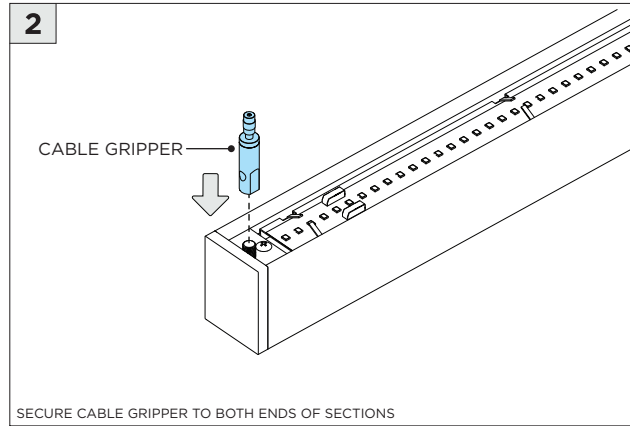
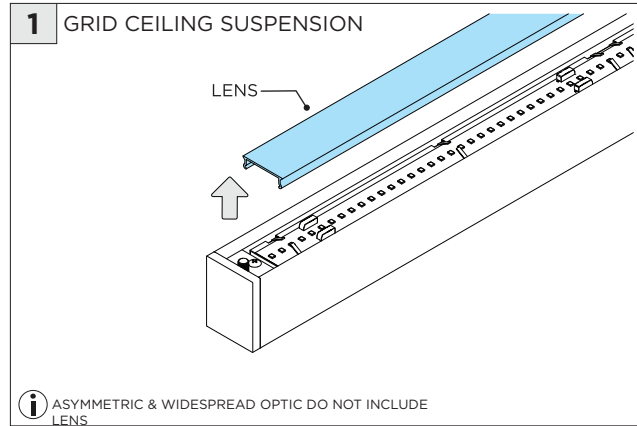


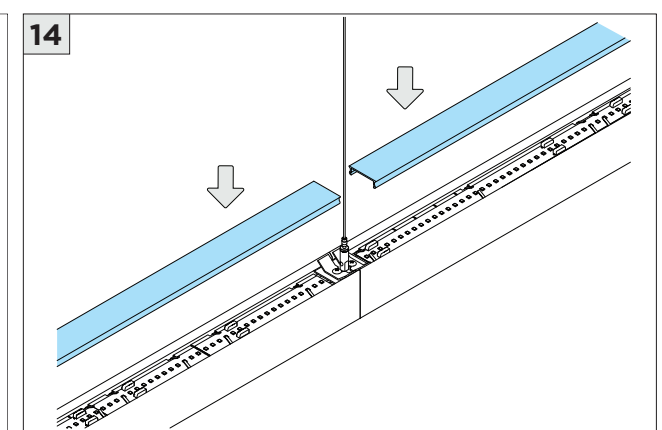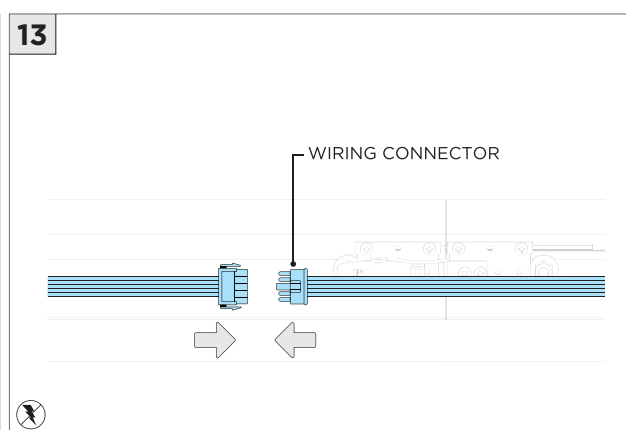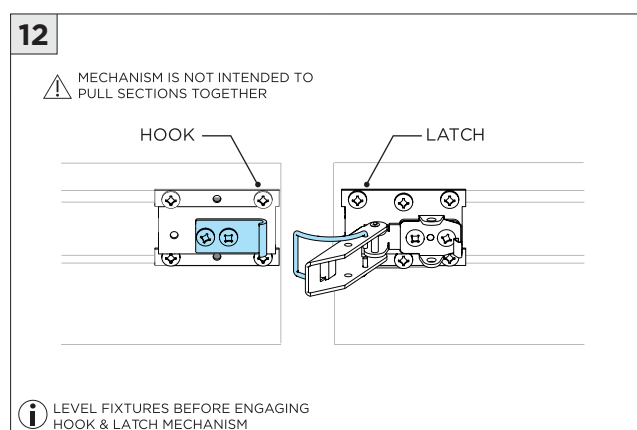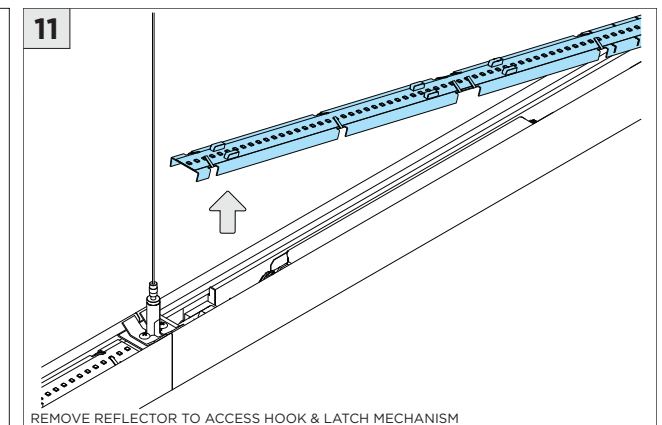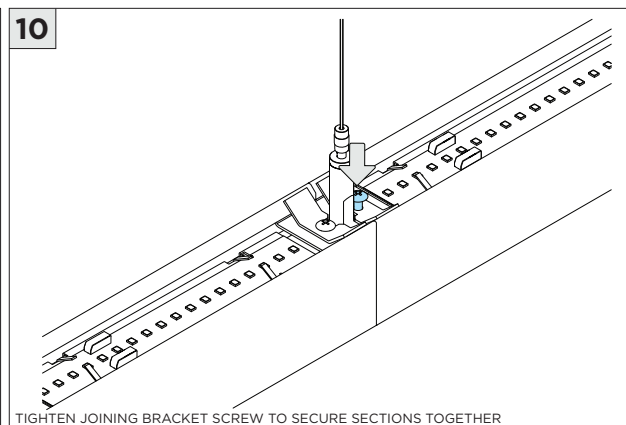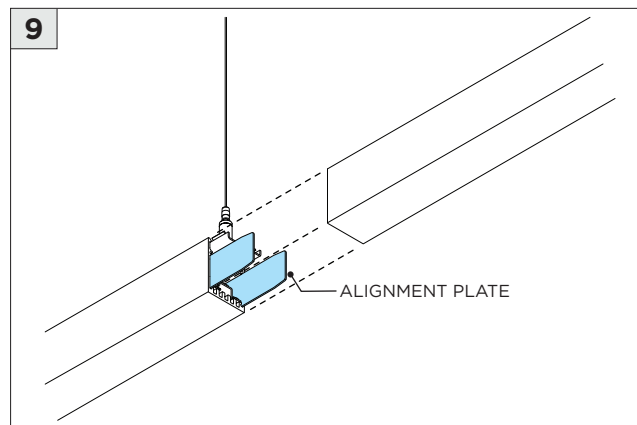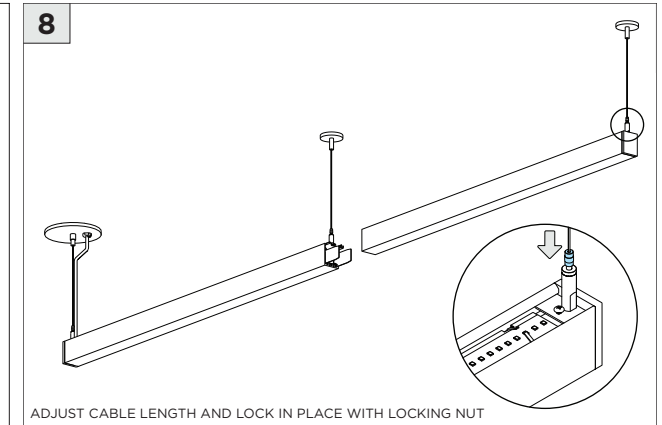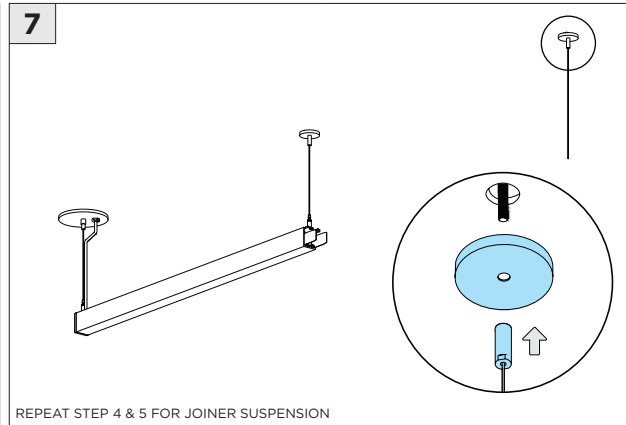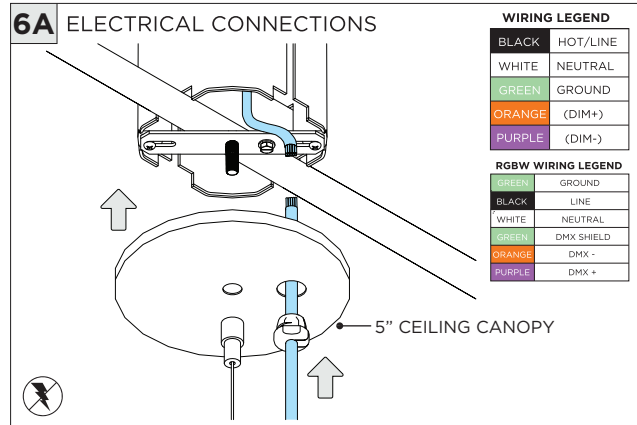






DRIVER SERVICING

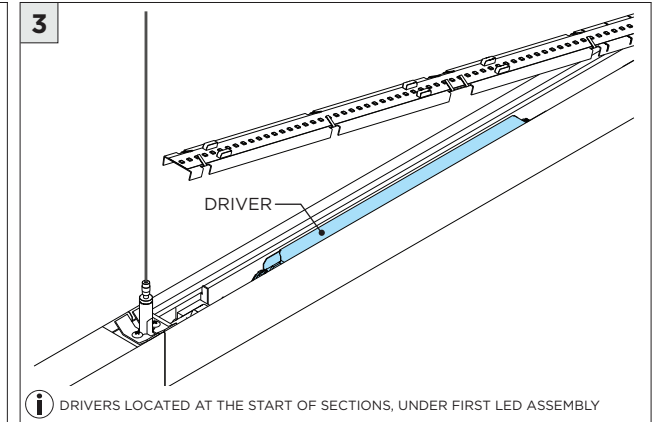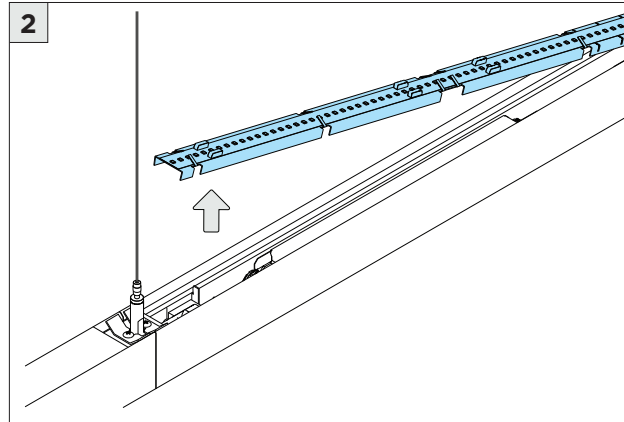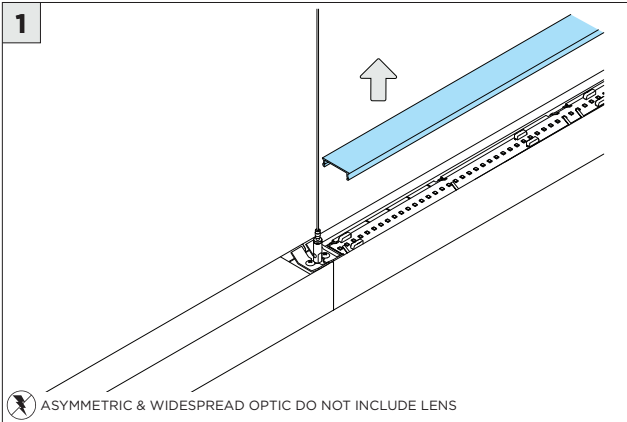


LED SERVICING - FLUSH LENS

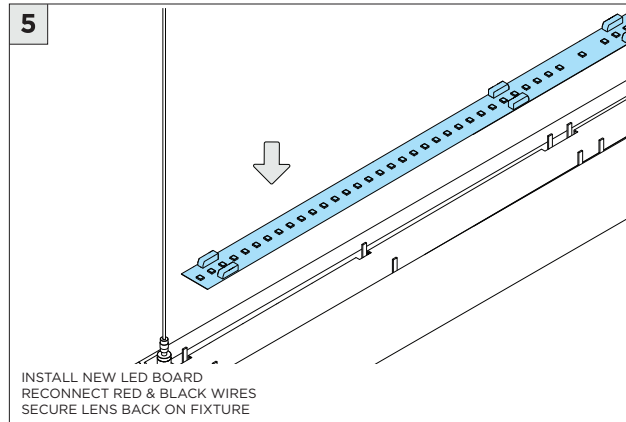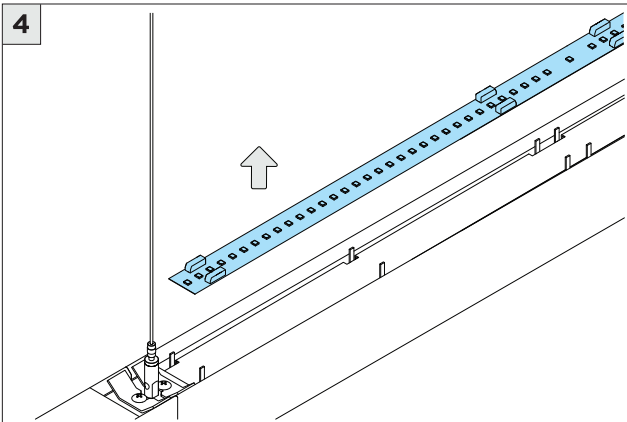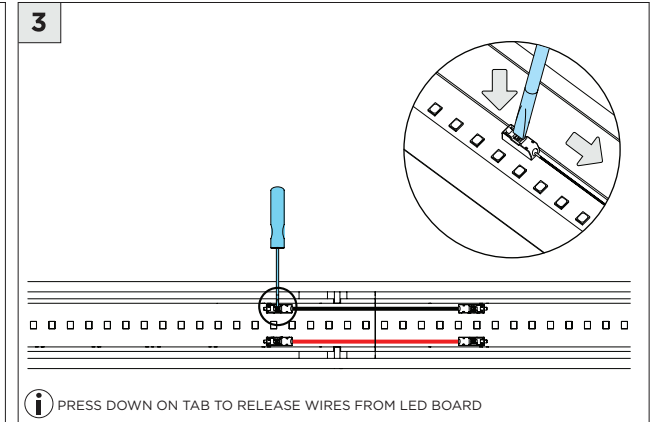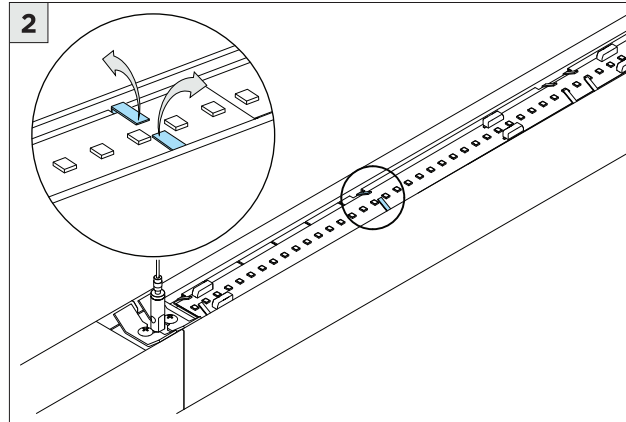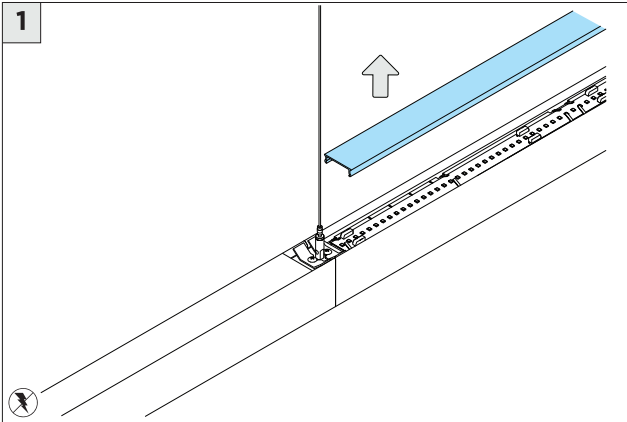

LED SERVICING - ASYMMETRIC & WIDESPREAD OPTIC

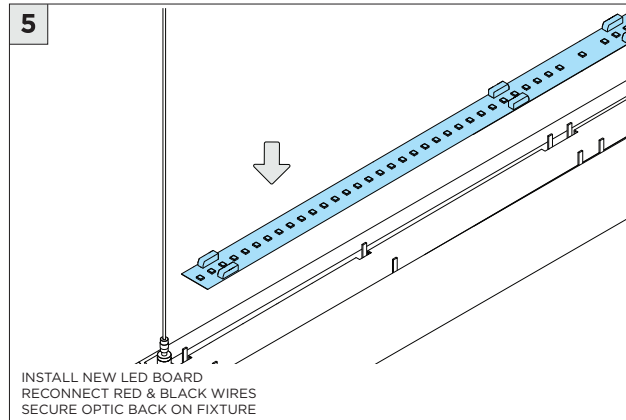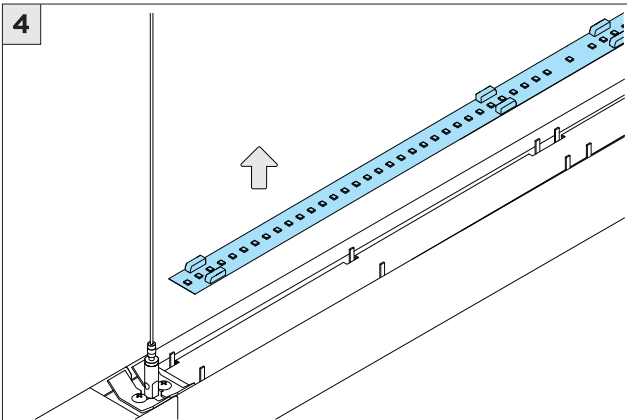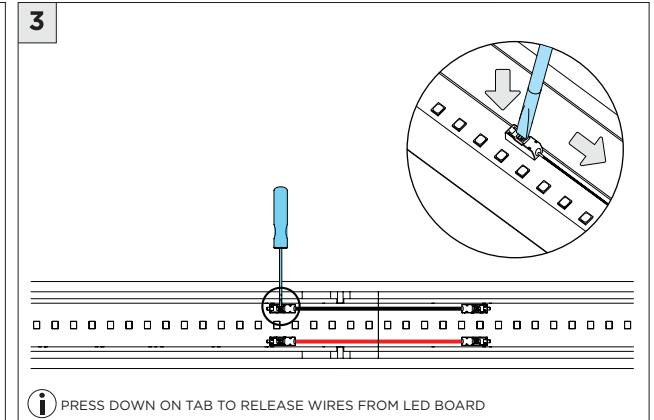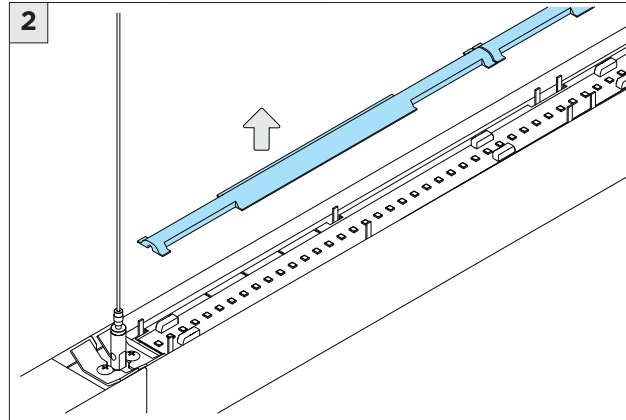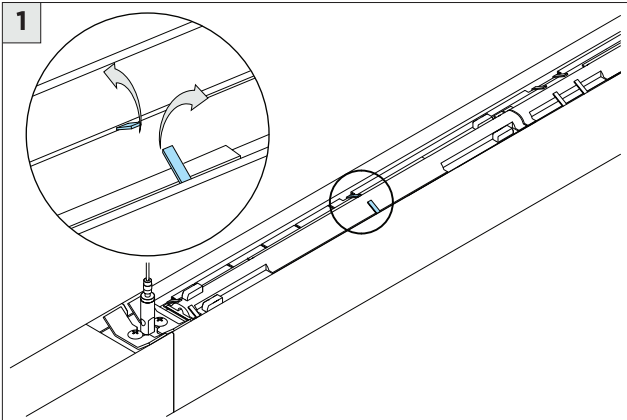

ASYMMETRIC ROOM SIDE DISTRIBUTION

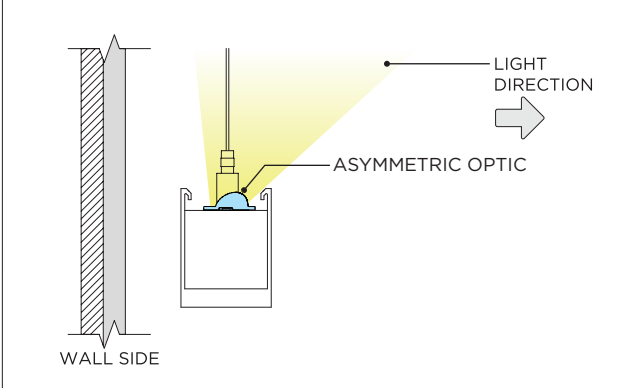

ASYMMETRIC WALL SIDE DISTRIBUTION

