



## 3Gi-1PSL 1.5" INTEGRATED PENDANT

DIRECT  
DIRECT/INDIRECT




Fixture Types	Included Components		
3Gi-1PSL		<b>Standalone Fixture (2' to 8')</b> STANDALONE      LENS	<b>Continuous Runs (9' to 16')</b> STARTER      ENDER      LENS
Continuous Runs (17' and longer)		STARTER      JOINER      ENDER      LENS	<b>Power feed kit</b>   <b>FOR GRID CEILING APPLICATION</b> 


Instruction Key	Information
	ADDITIONAL INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

**OVERVIEW**


**3Gi-1PSL - DRYWALL SUSPENSION**

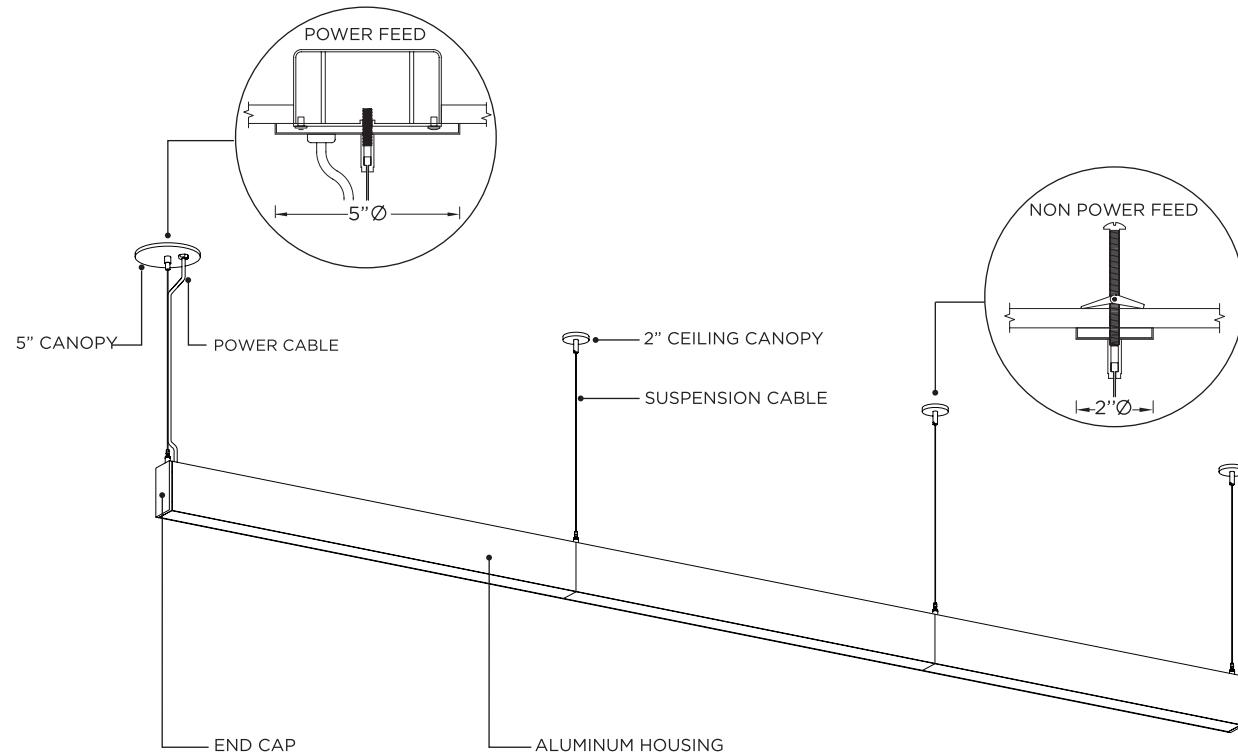

**POWER FEED SUSPENSION**

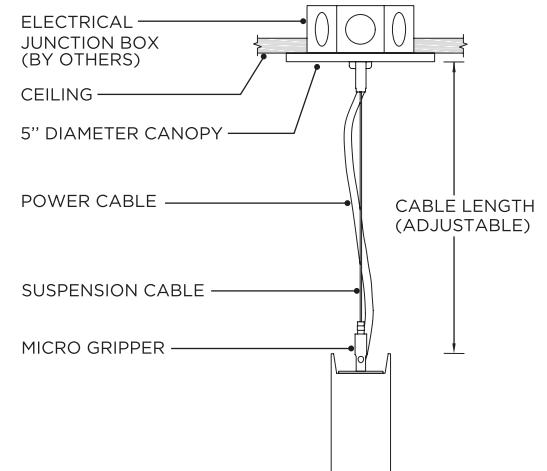


**NON - POWER FEED SUSPENSION**

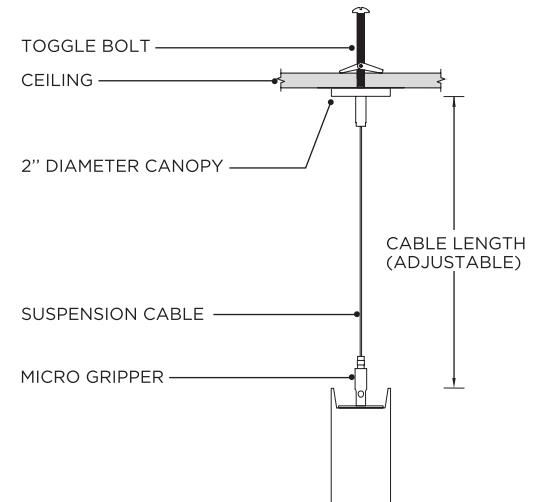


**OVERVIEW**


**3Gi-1PSL - GRID CEILING - GCX**

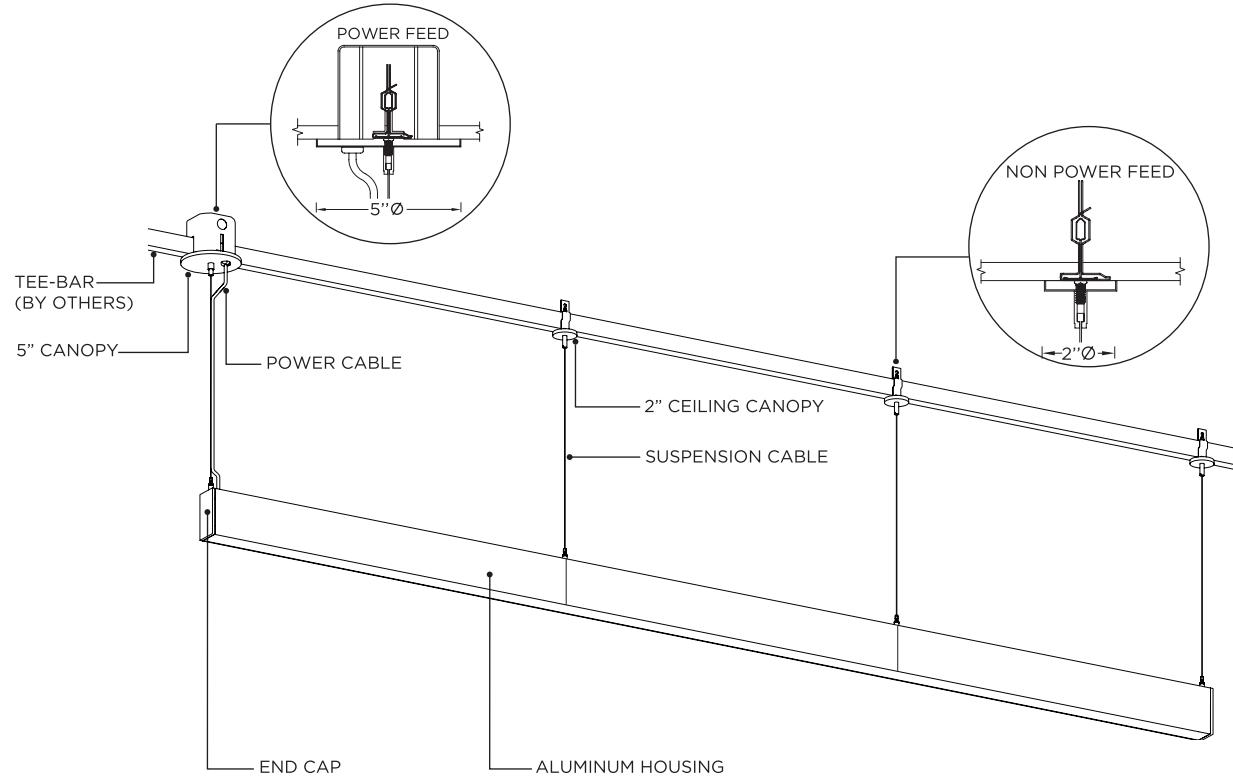

**POWER FEED SUSPENSION**

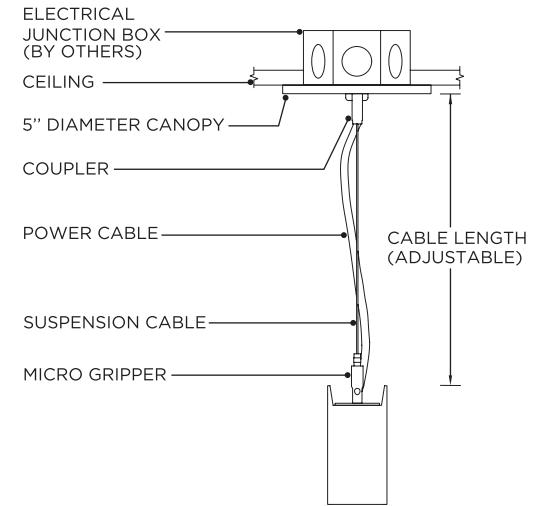



**NON - POWER FEED SUSPENSION**

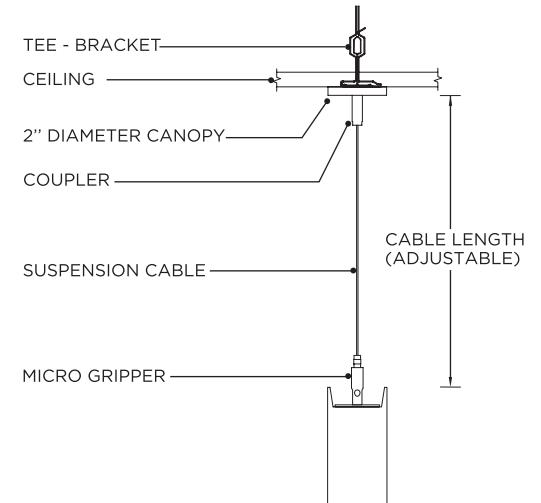



ASYMMETRIC LENS ORIENTATION

**3Gi-1PSL - ASYMMETRIC LENS**

ROOM SIDE DISTRIBUTION


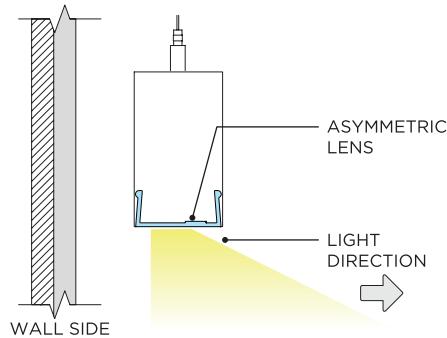


WALL GRAZING DISTRIBUTION


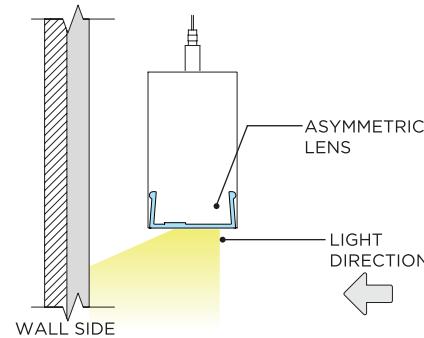


**INDIRECT ASYMMETRIC OPTIC**

ROOM SIDE DISTRIBUTION

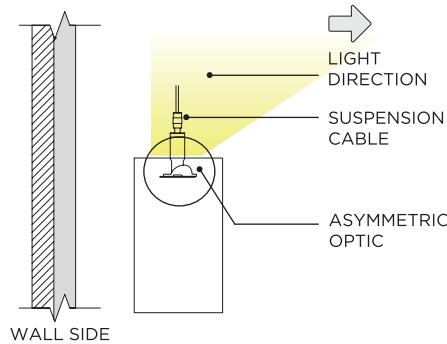


WALL GRAZING DISTRIBUTION

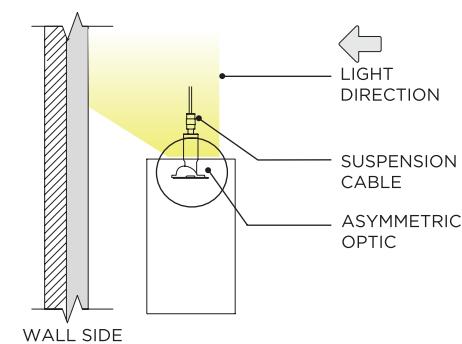

## SUSPENSION CABLE LOCATION


### STANDALONE

STANDALONE  
 AT 0.25" FROM EACH END OF LENGTH

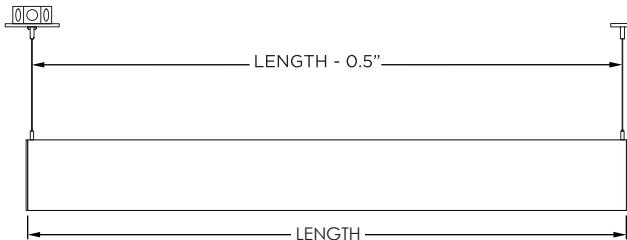

### STARTER, JOINER, and ENDER

STARTER/JIONER/ENDER  
 AT 0.125" FROM EACH END OF SECTION LENGTH

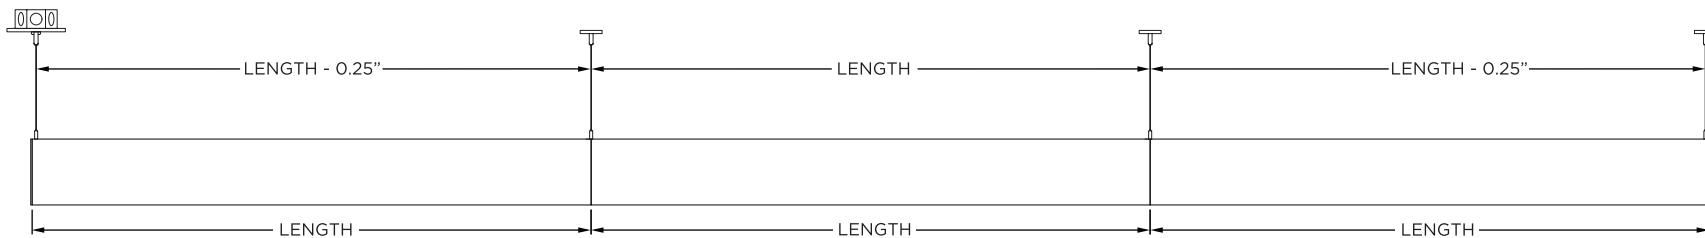


## IDENTIFICATION AND PREPARATION

### ID LABEL

TYPE: XX XX  
 ID: 01 OF 03 CO-0000  
 SECTION ID NUMBER ORDER NUMBER ORDER TYPE


### ID LABEL

SECTION: 01 OF 03  
 TYPE: XX XX CO-0000

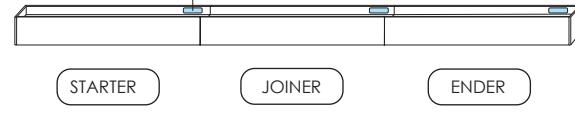


**i** IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS


**1** DRYWALL SUSPENSION - POWER FEED

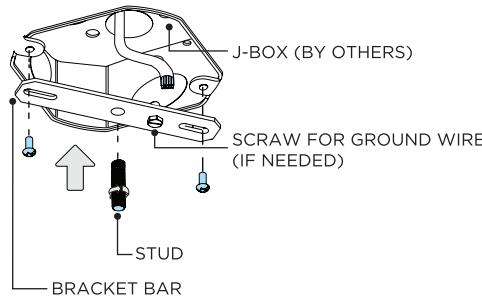


**2**




**3** DRYWALL SUSPENSION - NON-POWER FEED




**4**




**5A** ZOIE REMOVAL

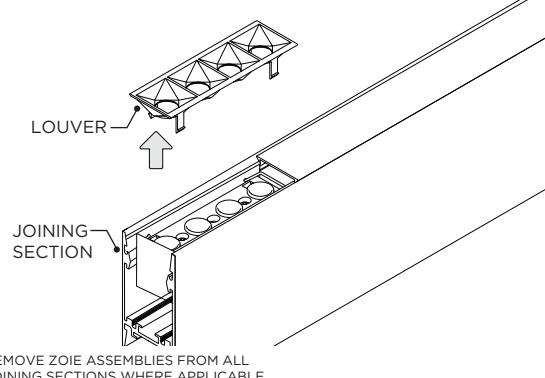


**5B**

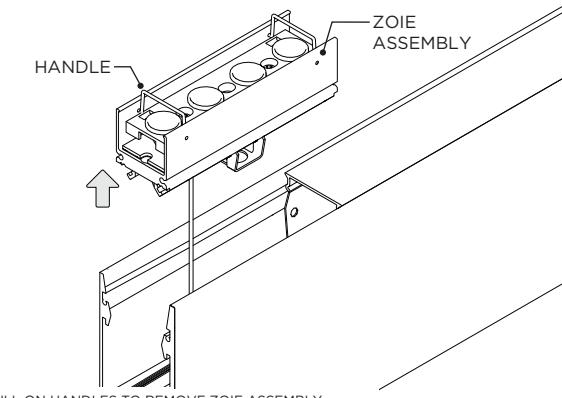

**5C**

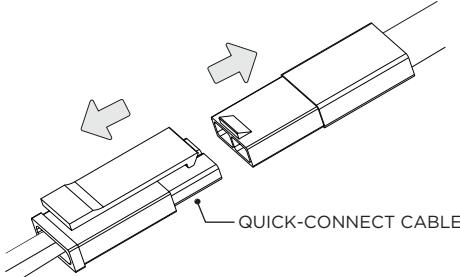











**6**




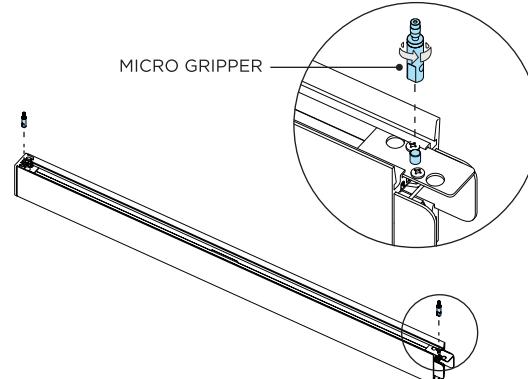


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


**7**

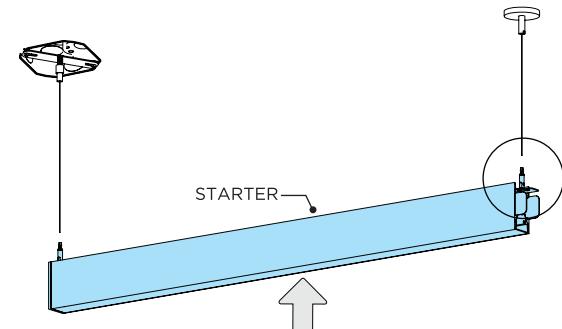

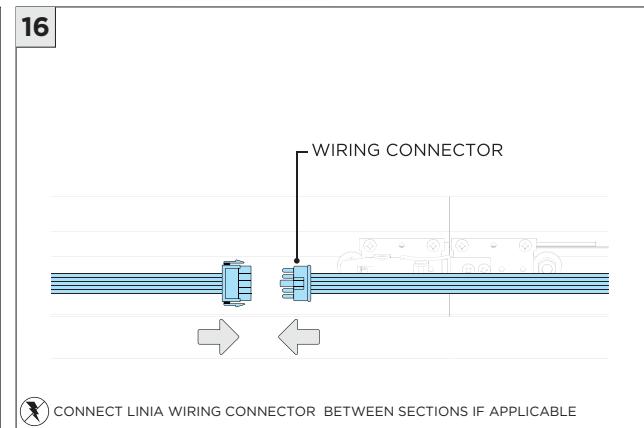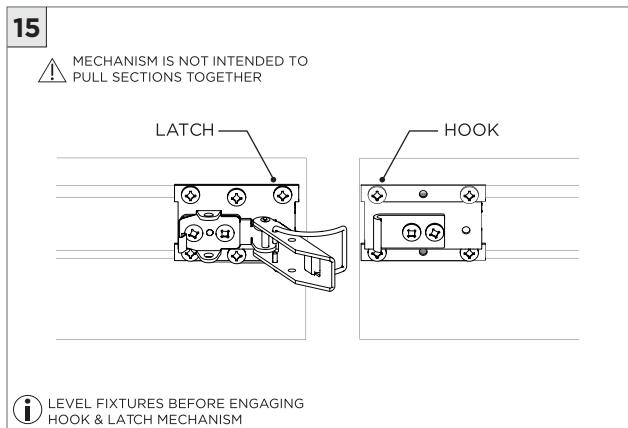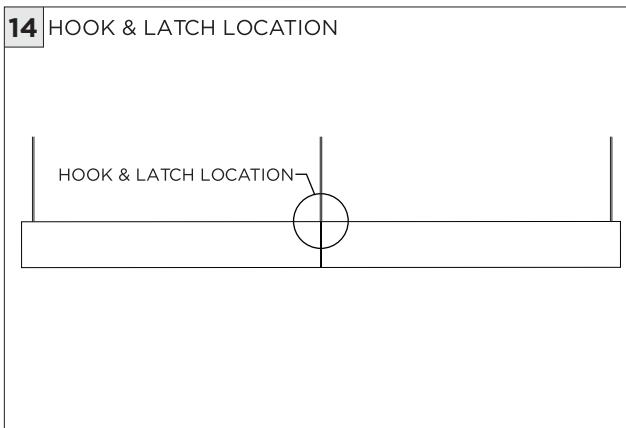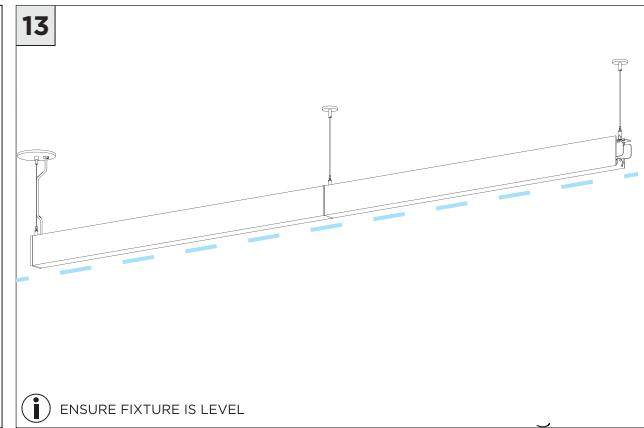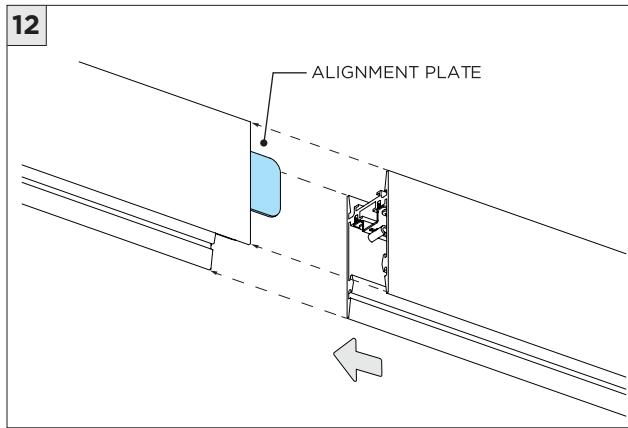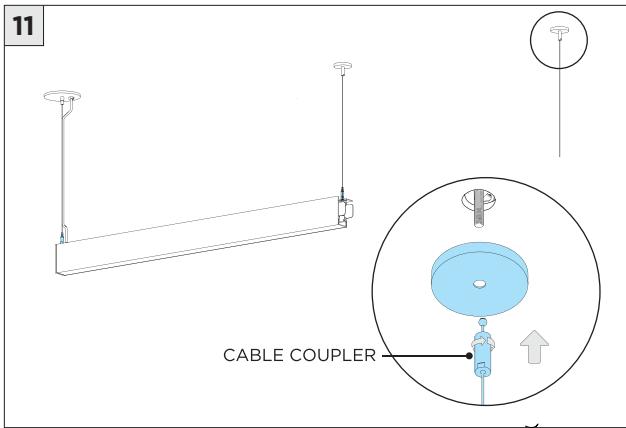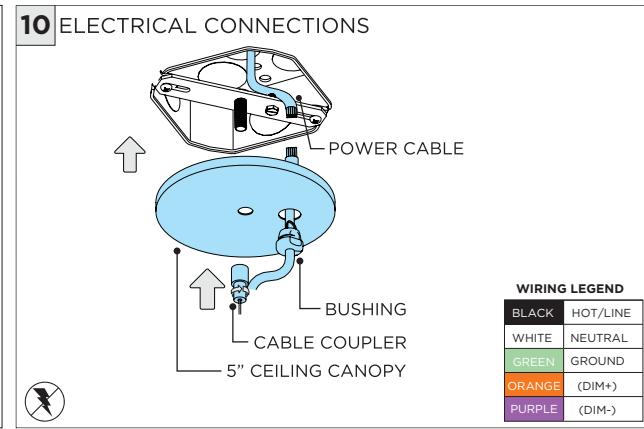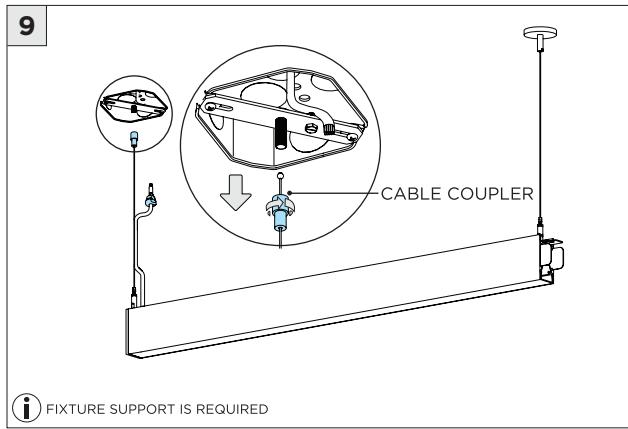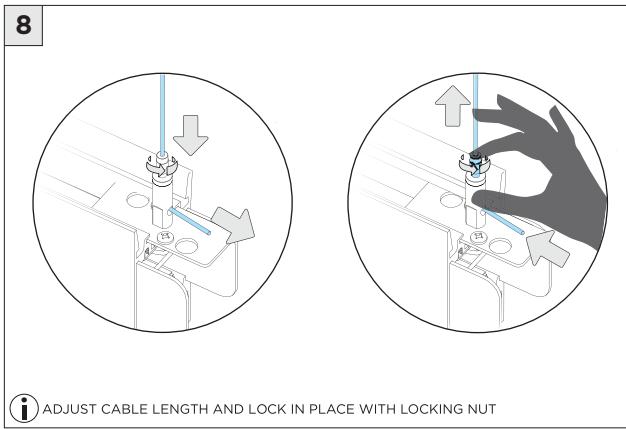


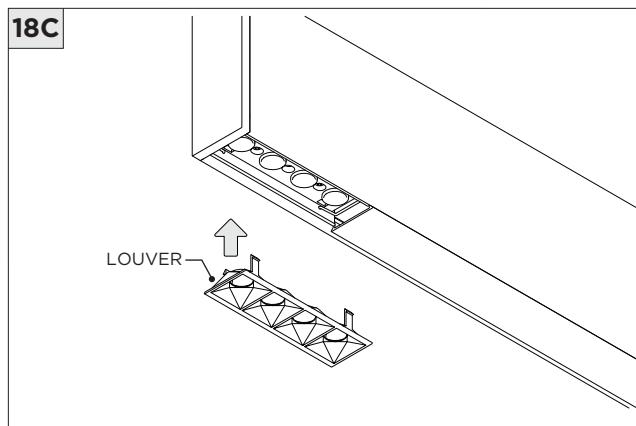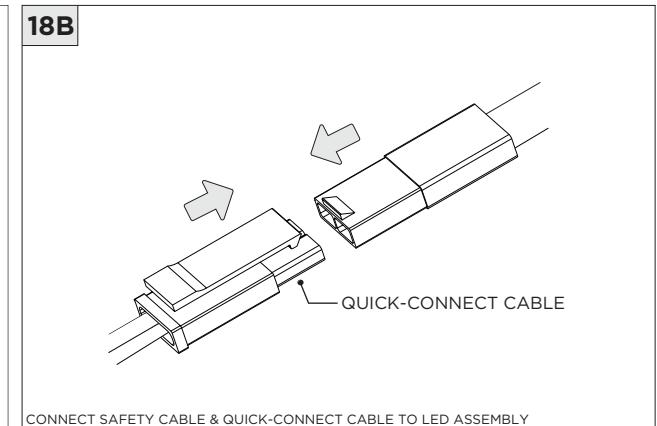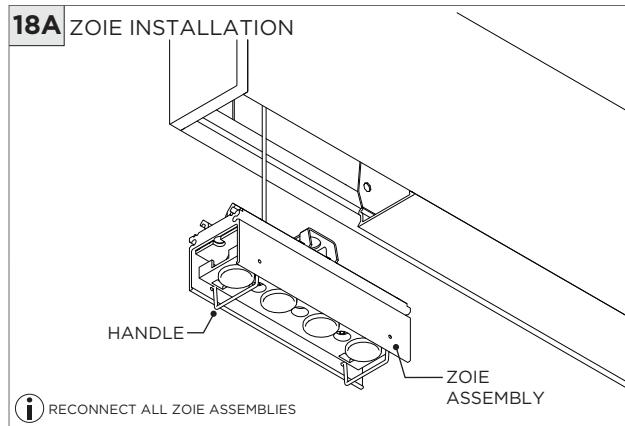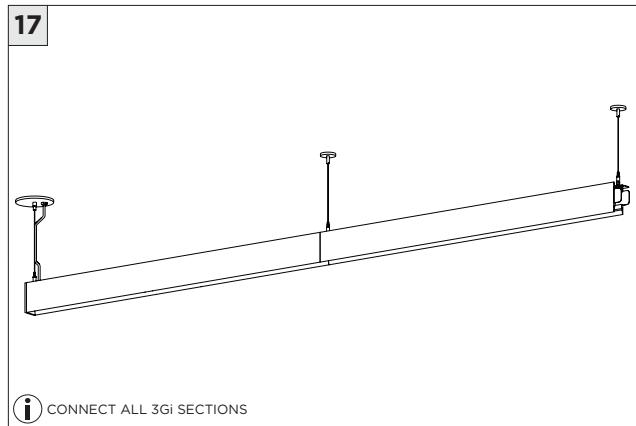


**1** GRID CEILING SUSPENSION - POWER FEED

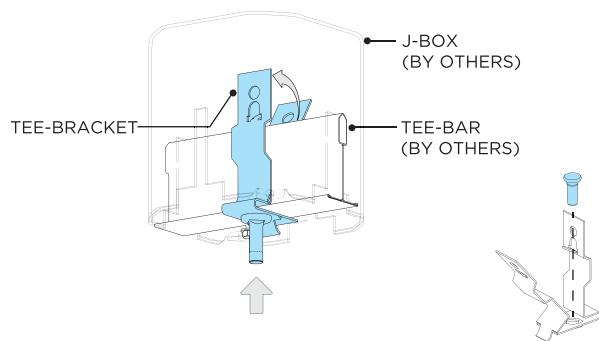


**2**

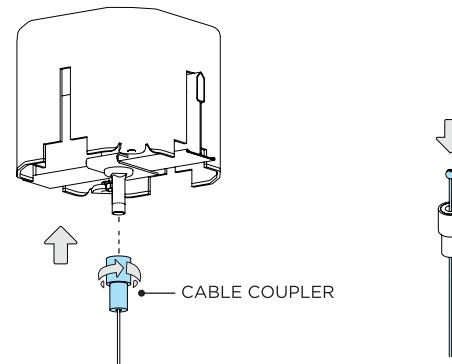


**3** GRID CEILING SUSPENSION - NON-POWER FEED

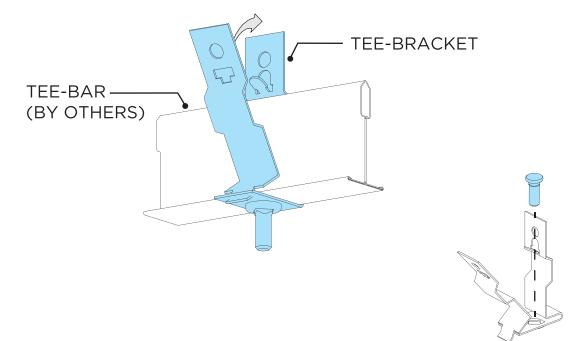


**4**

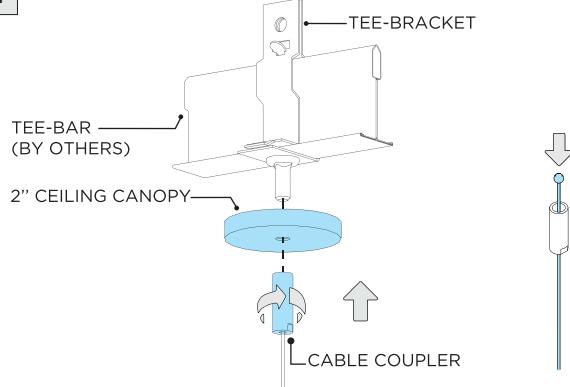


**5A** ZOIE REMOVAL

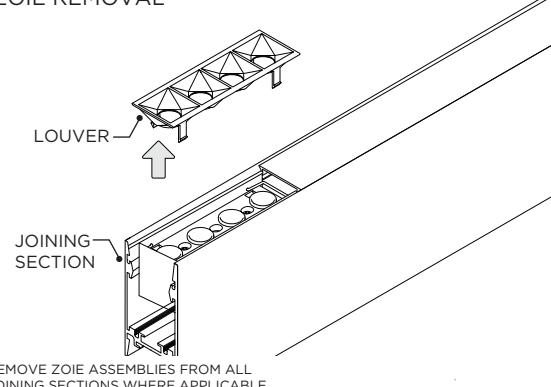

**5B**

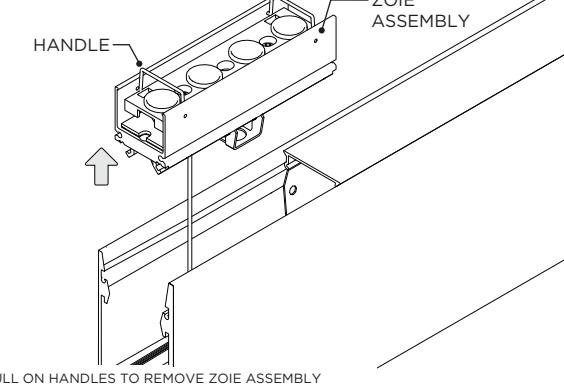


**5C**

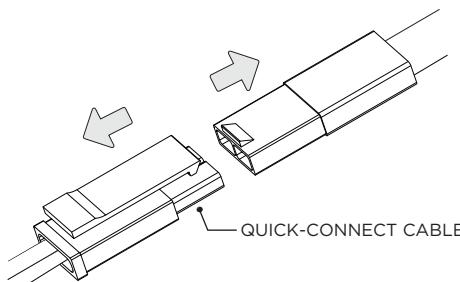


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY










**6**




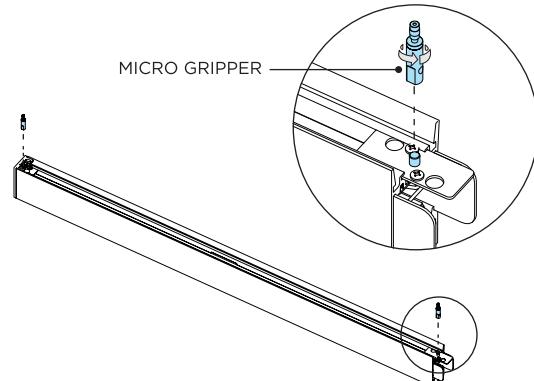


**7**

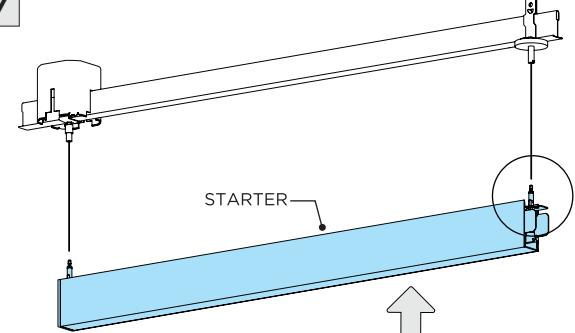


**NOTE:** FOR 3Gi-4PSL-DASY FIXTURES SEE PAGE 4 BEFORE MOUNTING

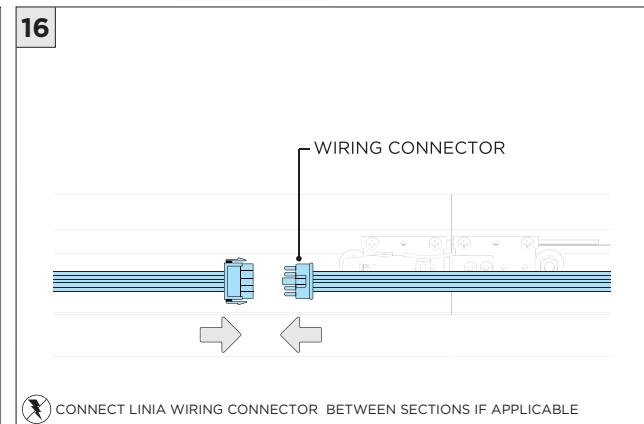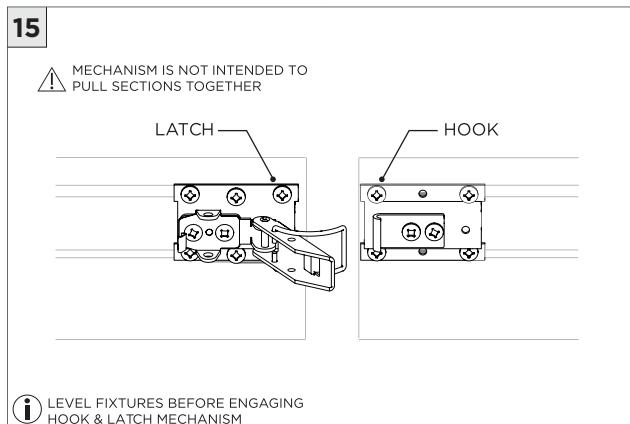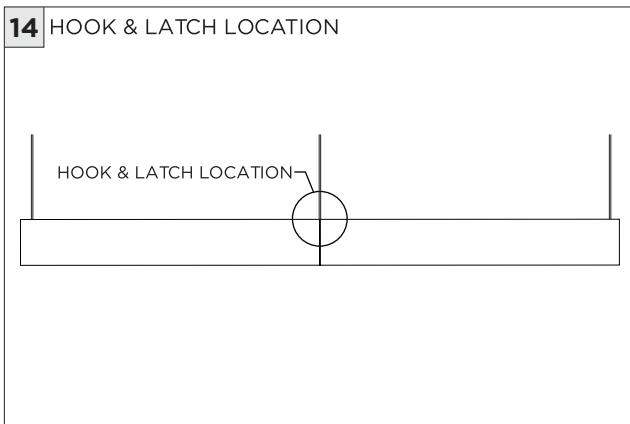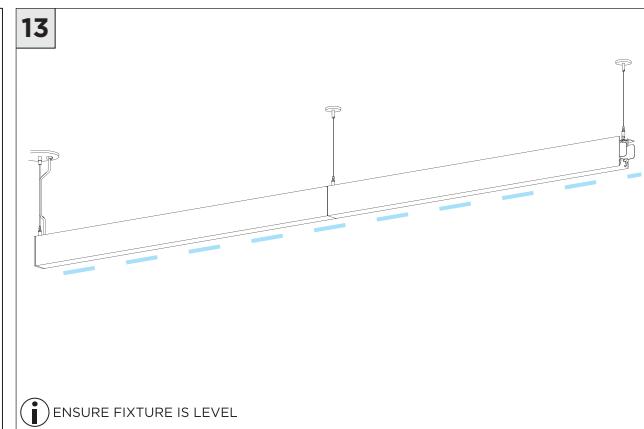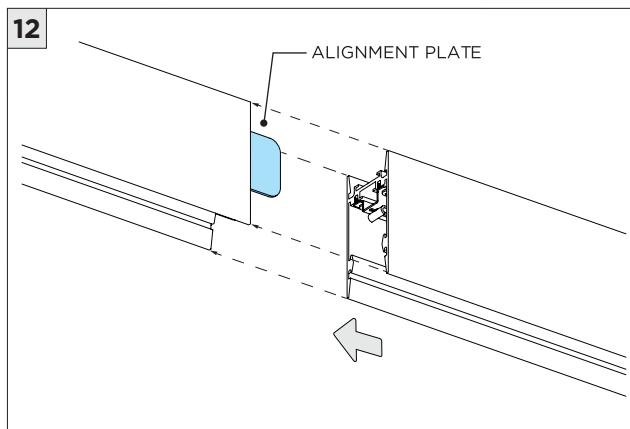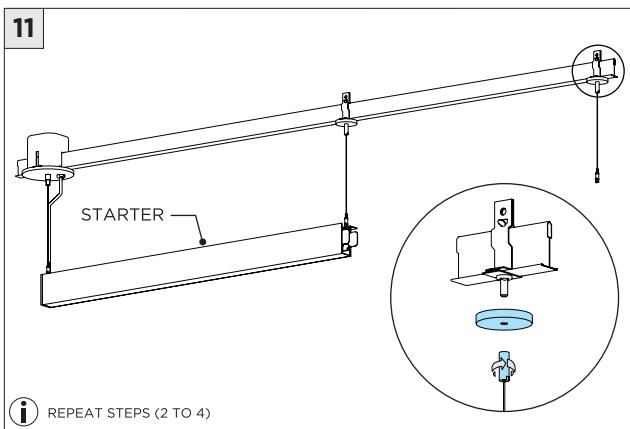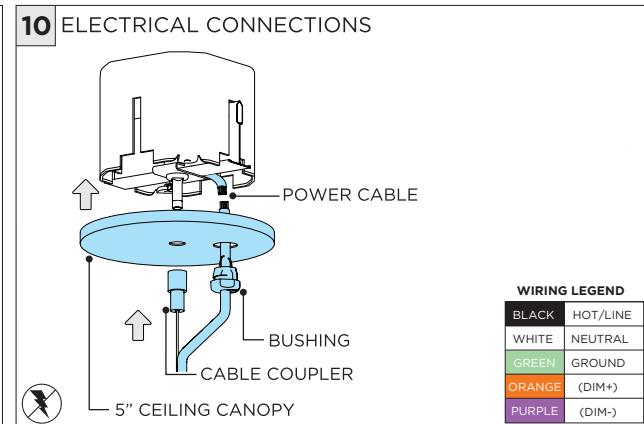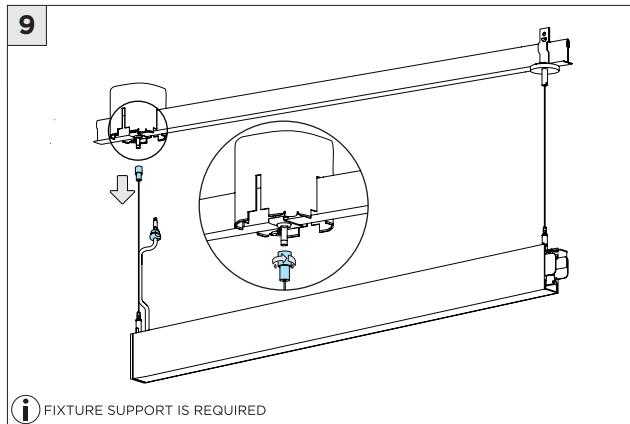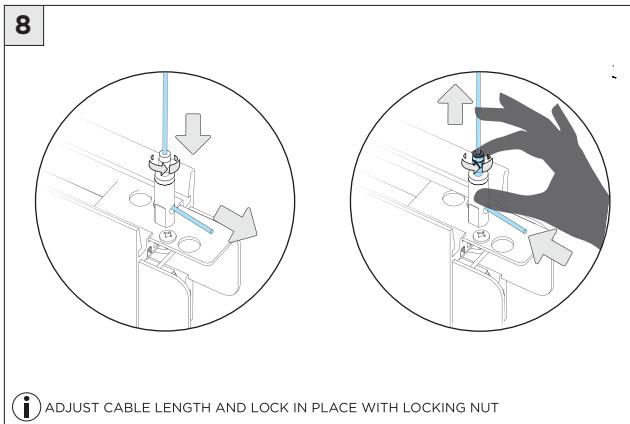

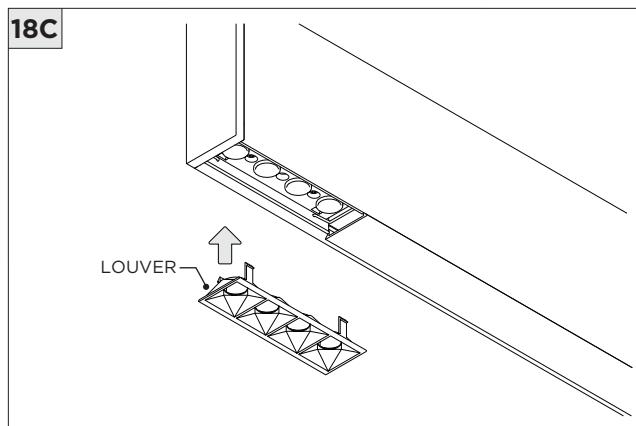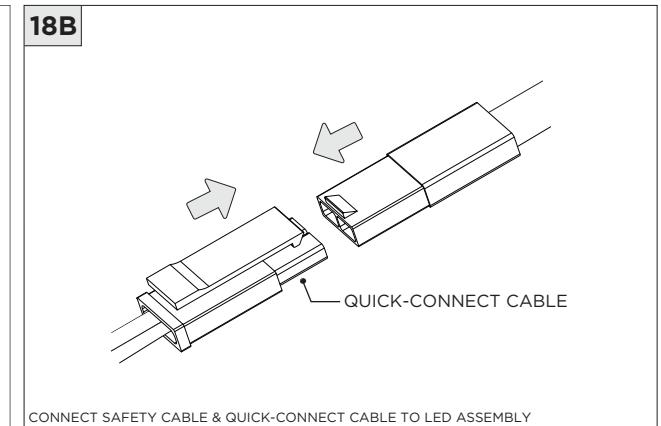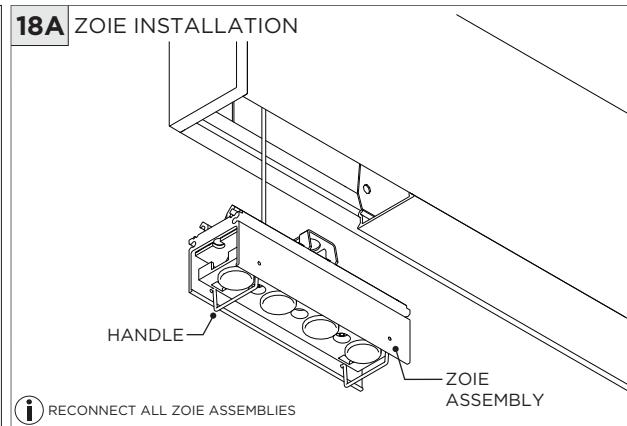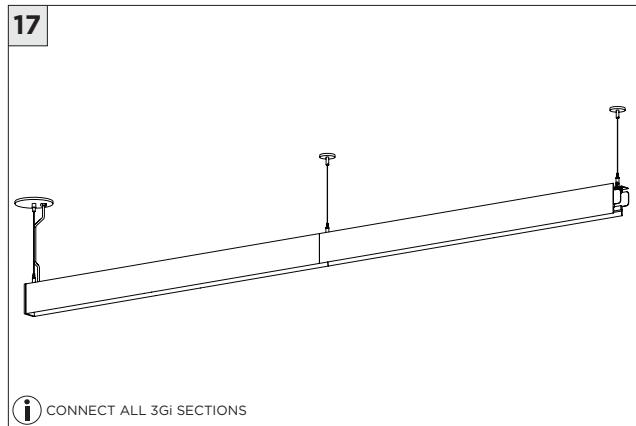


## DRIVER SERVICING


### 1 FLUSH LENS REMOVAL

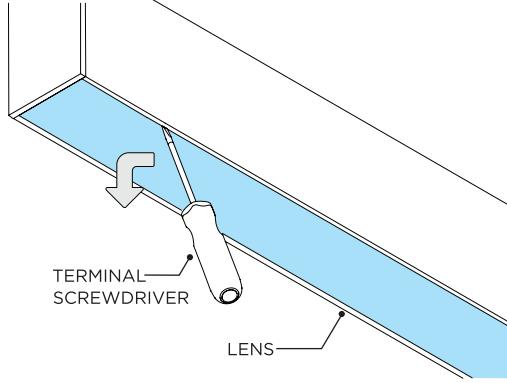


2

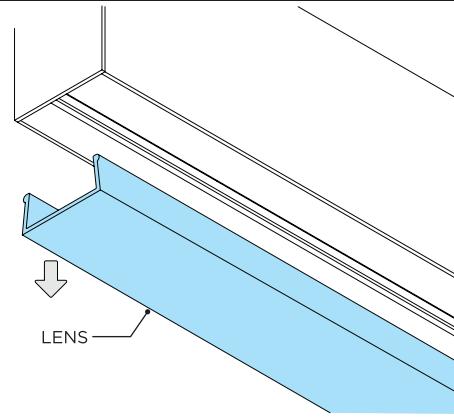


3

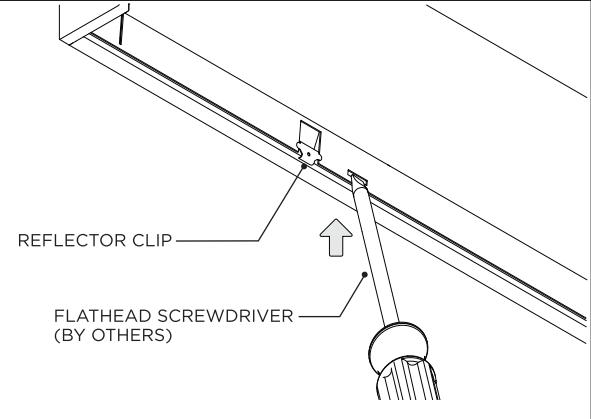


4

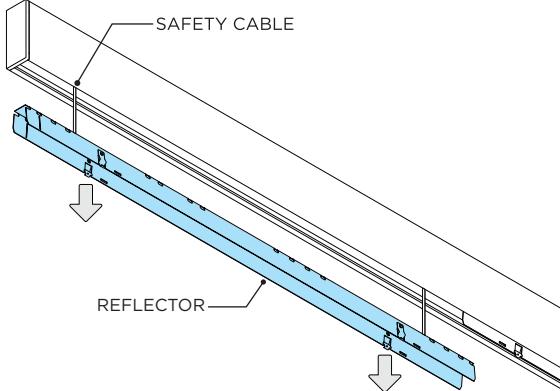


5

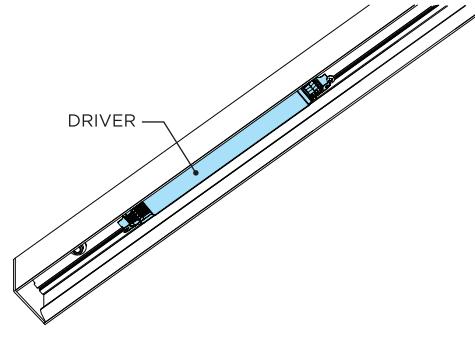


6

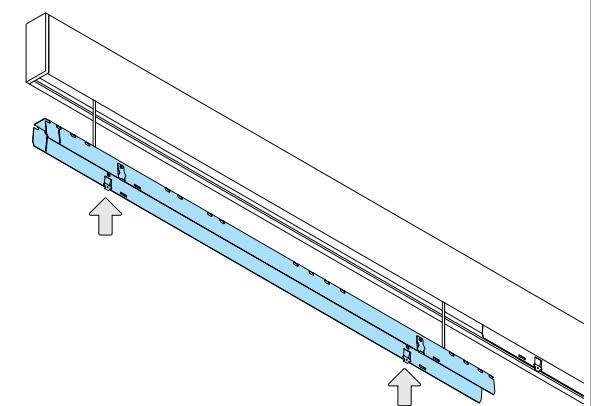

7

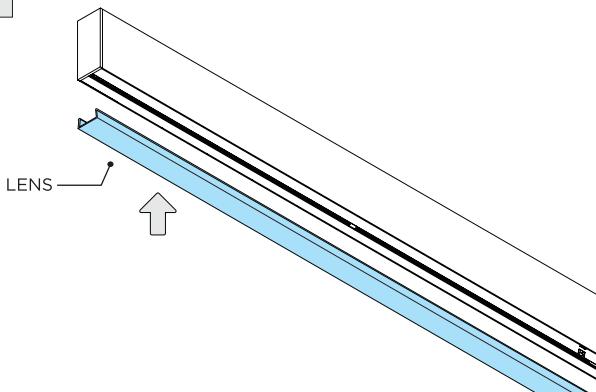


## LED SERVICING - DIRECT

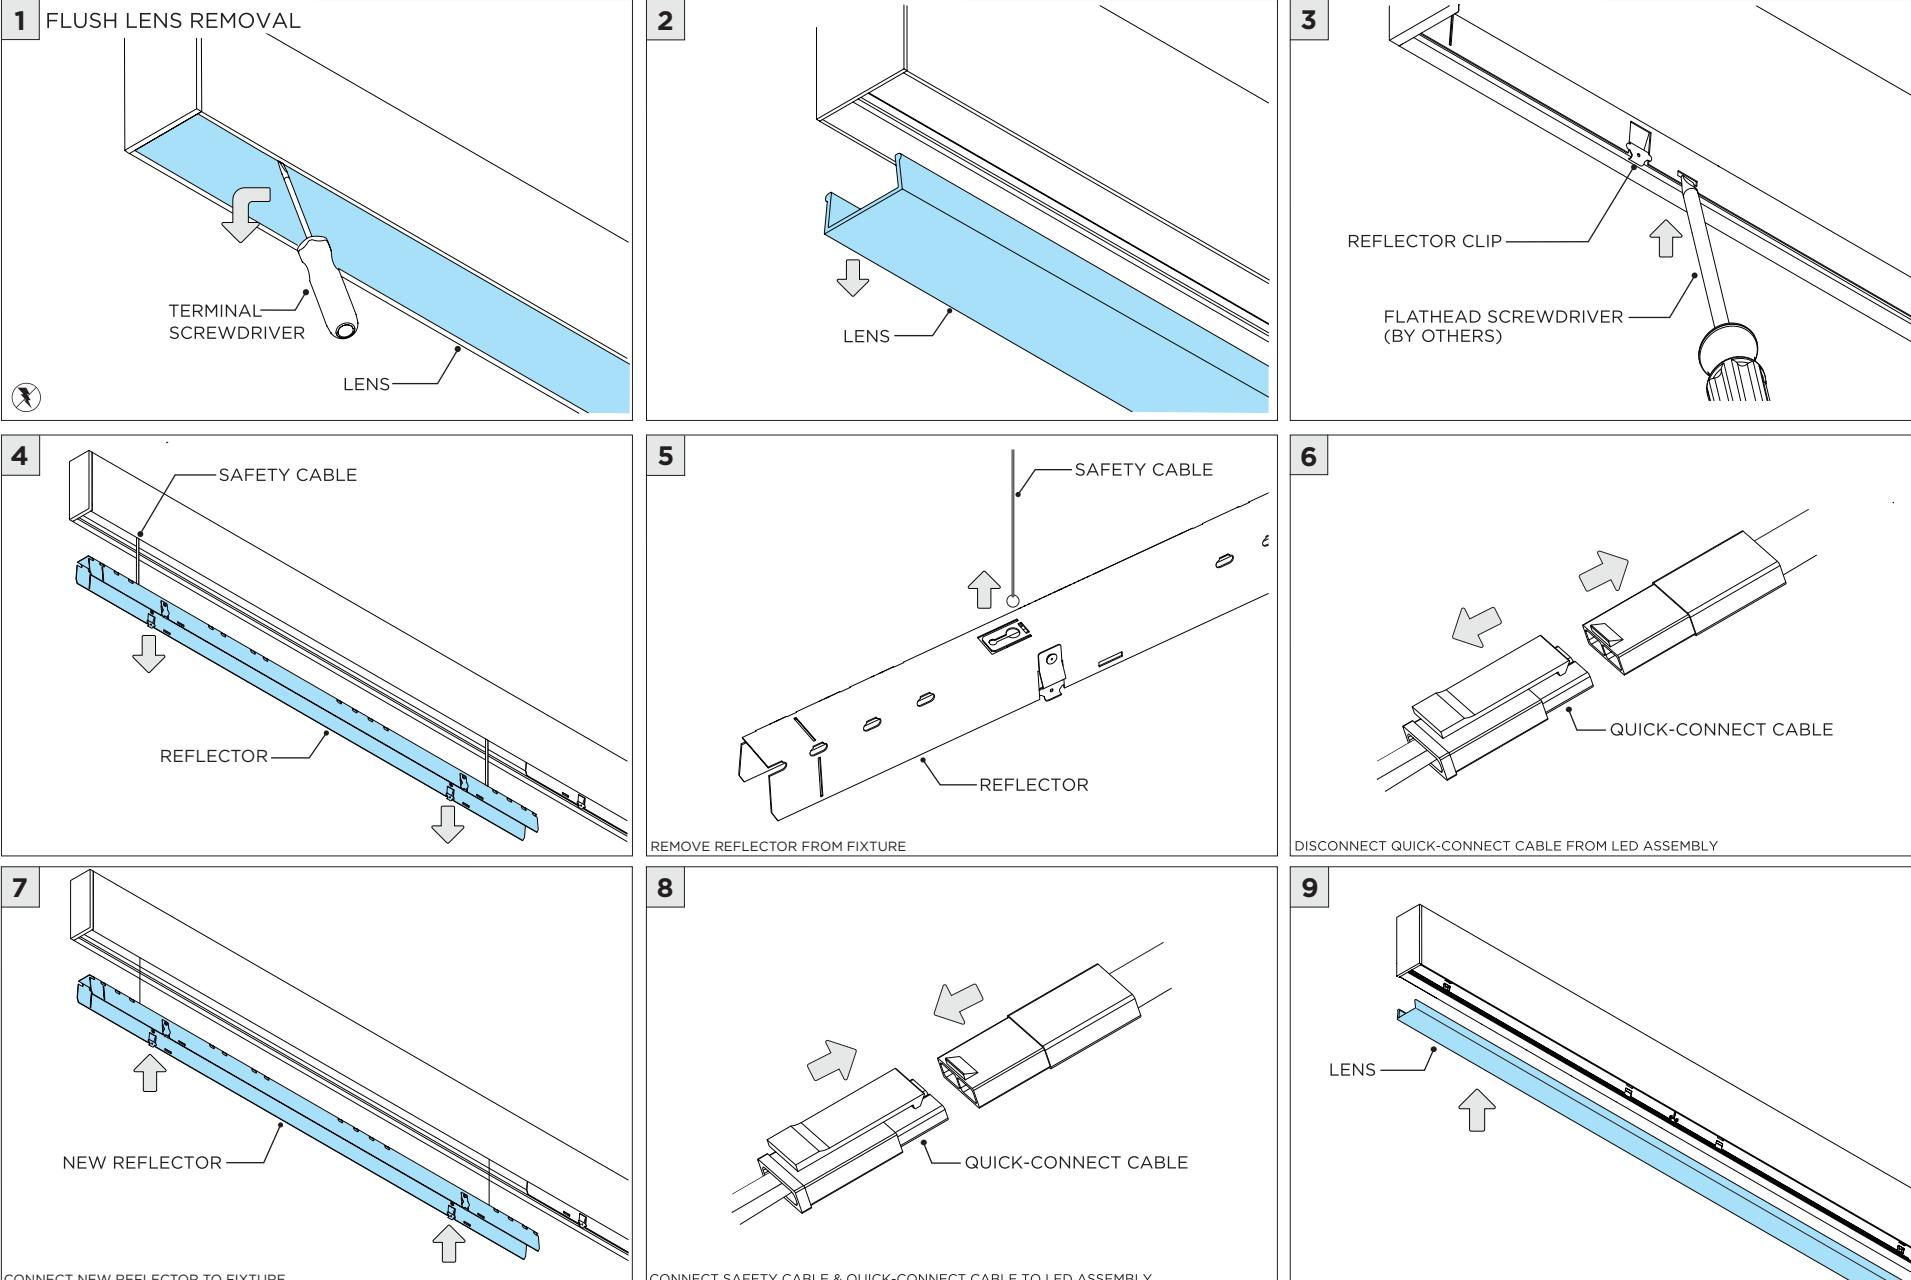


**ZOIE SERVICING**


**1**

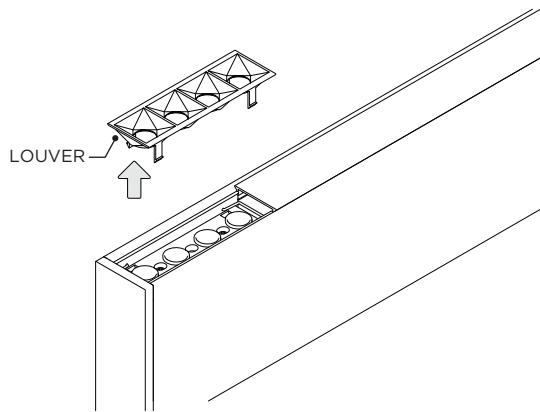

**2A**

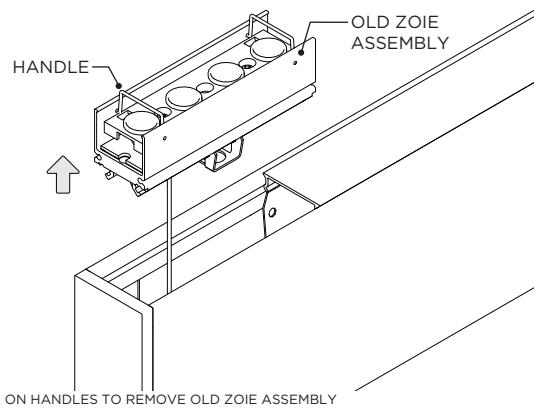


**2B**

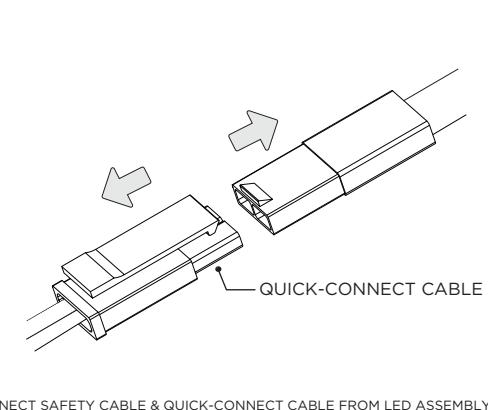


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**3A**

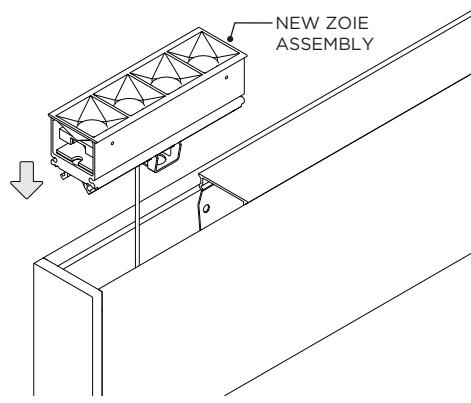


**3B**

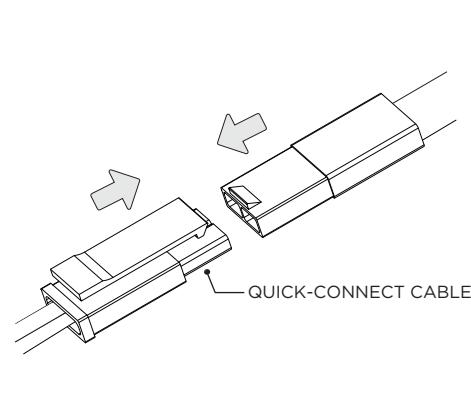


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

## LED SERVICING - INDIRECT


### 1 INDIRECT LENS REMOVAL

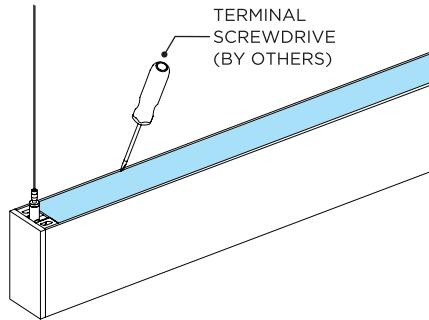


### 2

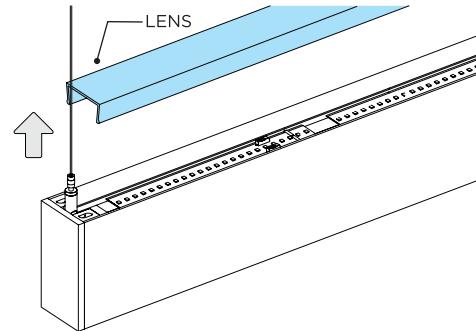


### 3

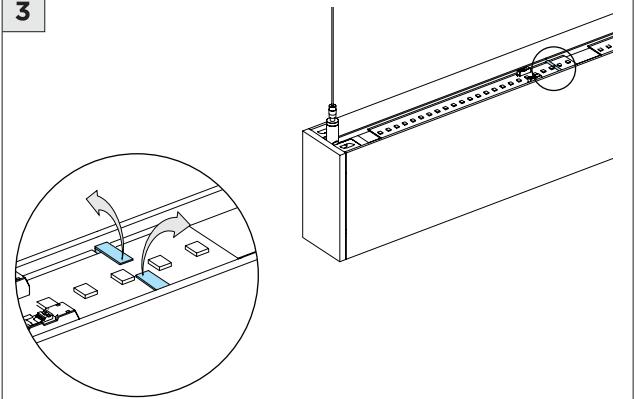


### 4

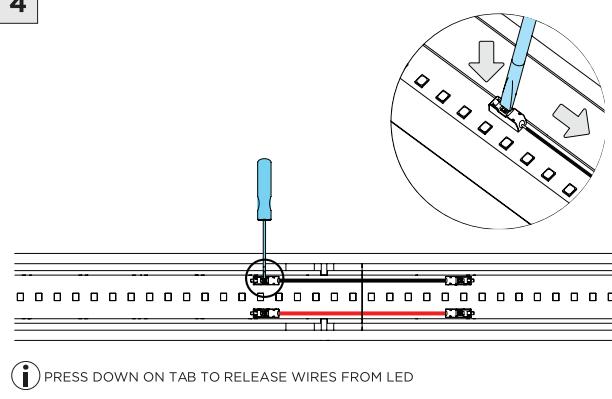


### 5

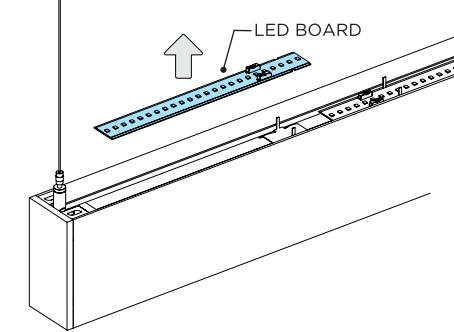


### 6

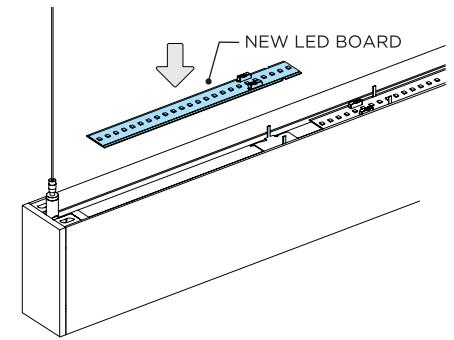

### 7

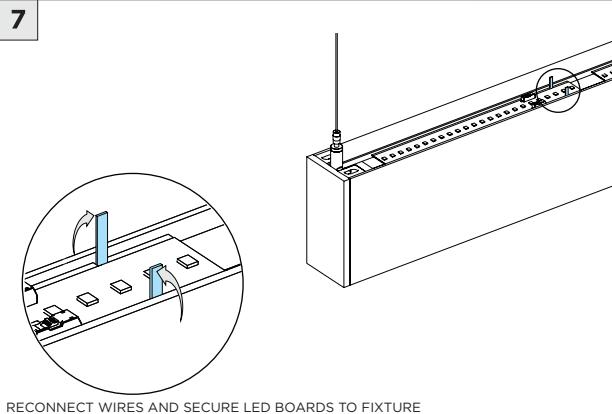

### 8

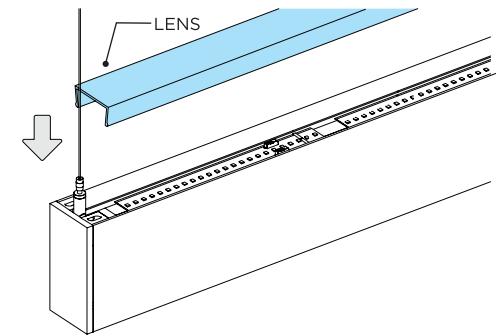

**LED SERVICING - INDIRECT - ASYMMETRIC AND WIDE SPREAD OPTIC**

