


3Gi-1RSL 1.5" INTEGRATED RECESSED SLOT

FLANGELESS/TRIM FLANGE

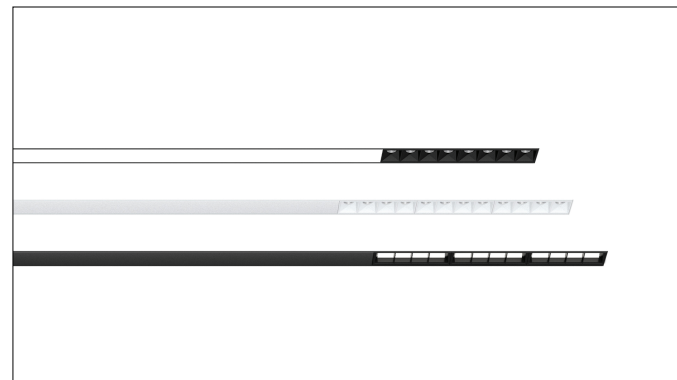

⚠ FOR **NEW CONSTRUCTION** INSTALLATION ONLY

ℹ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

FIXTURE TYPES		INCLUDED COMPONENTS	
<p>3Gi-1RSL</p>		<p>Standalone Fixtures (2' to 8')</p> <p>INDIVIDUAL LENS</p>	<p>Continuous Runs (9' to 16')</p> <p>STARTER ENDER LENS</p>
<p>Continuous Runs (17' and longer)</p> <p>STARTER JOINER ENDER LENS</p>		<p>INTEGRATED OPTIONS</p> <div> <p>3G-1RSL</p> <p>NON ILLUMINATED</p> <p>1.5" LINIA</p> <p>ZOIE</p> <p>WALL WASH ZOIE</p> </div> <div> <p>3G-2RSL</p> <p>2" LINIA</p> <p>1" DOWNLIGHT</p> </div> <div> <p>3G-4RSL</p> <p>3.5" LINIA</p> <p>ADJUSTABLE ZOIE</p> <p>MICRO MADISON</p> <p>2" DOWNLIGHT</p> </div>	


INSTRUCTION KEY	INFORMATION
⚠	ADDITIONAL
ℹ	ATTENTION
⚡	POWER ON
⏻	POWER OFF
	<p>INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN</p> <p>REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION</p> <p>FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY</p> <p>DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS</p> <p>TURN OFF POWER DURING INSTALLATION OR SERVICING</p>

OVERVIEW

FLANGELESS - FX




FLANGELESS - FX

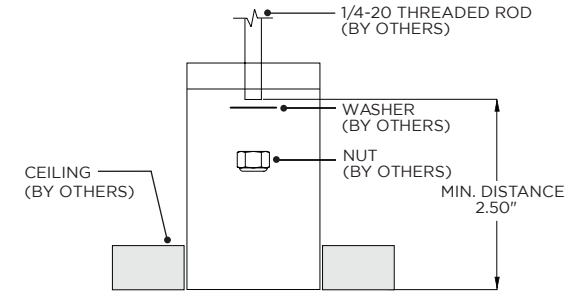


FLANGELESS - FX - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3Gi-1RSL	1.600"	LENGTH + 0.125"

WHITE TRIM FLANGE - WT

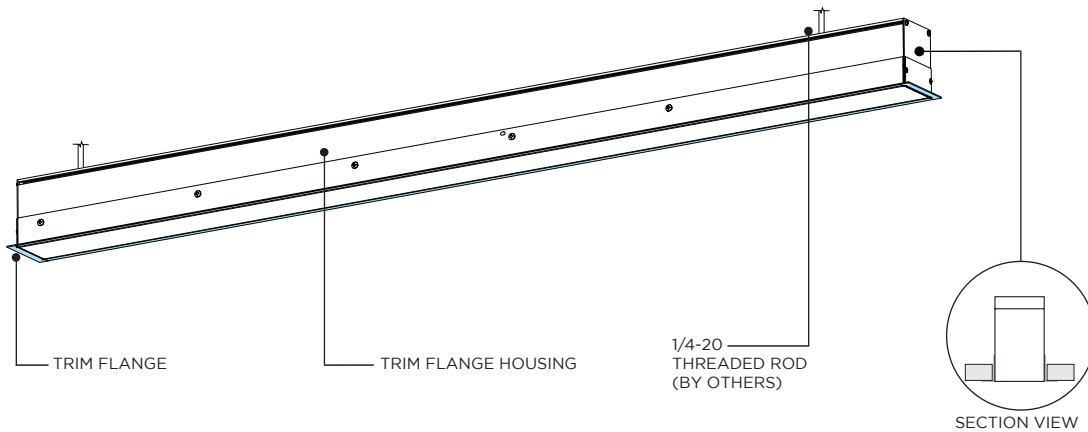



WHITE TRIM FLANGE - WT

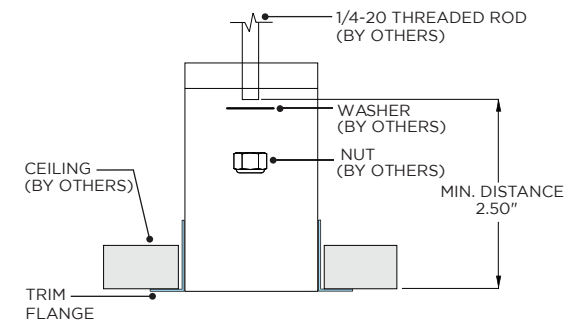


WHITE TRIM FLANGE - WT - CEILING CUT-OUT DIMENSIONS

FIXTURE TYPE	WIDTH	LENGTH
3Gi-1RSL	2.150"	LENGTH + 0.380"

ASYMMETRIC LENS ORIENTATION

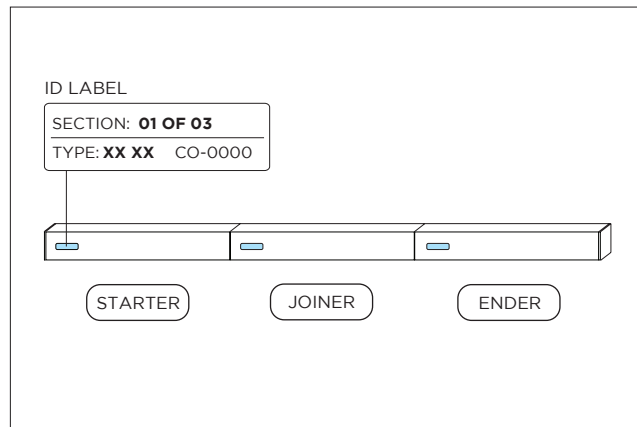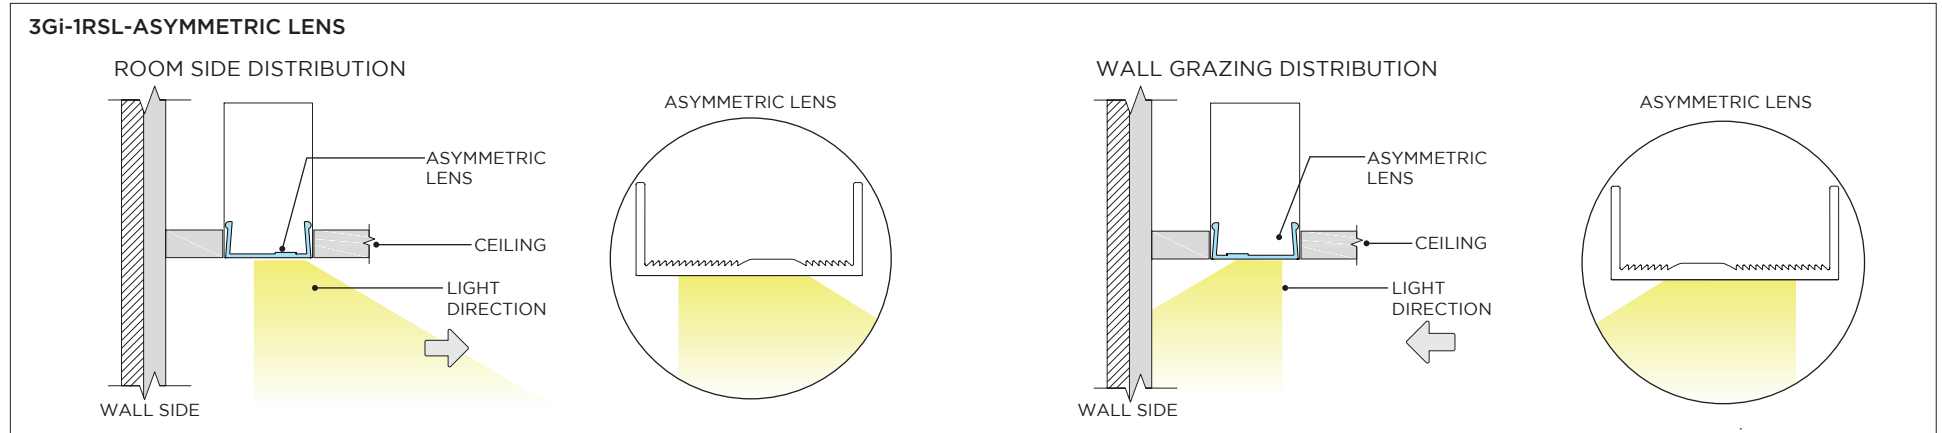


THREADED ROD LOCATION

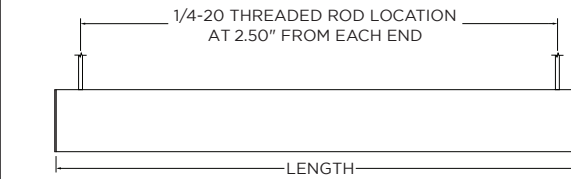

THREADED ROD LOCATION


3'	31"	6'	67"
4'	43"	7'	79"
5'	55"	8'	91"

IDENTIFICATION AND PREPARATION

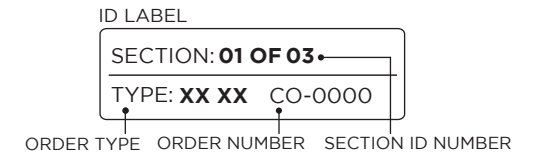


i IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS

1A ZOIE REMOVAL

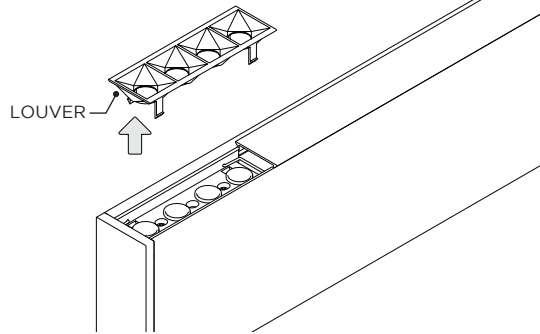


i REMOVE DOWNLIGHT ASSEMBLIES FROM START AND END OF ALL SECTIONS WHERE APPLICABLE

1B

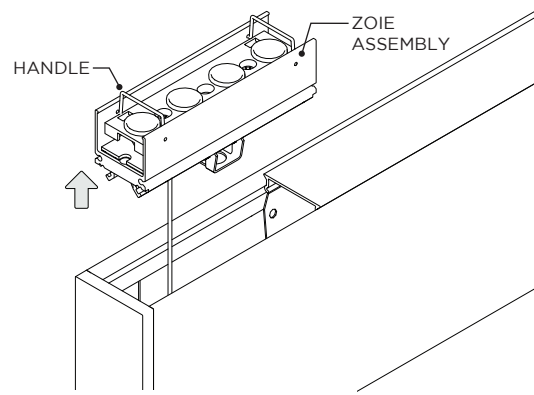


i PULL ON HANDLES TO REMOVE ZOIE ASSEMBLY

1C

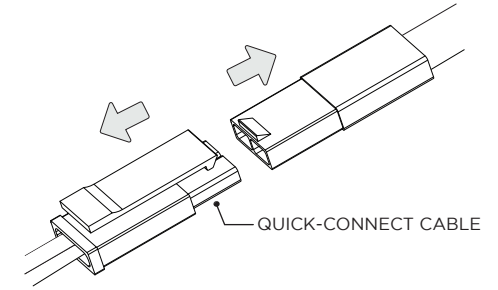


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


2 FIXTURE INSTALLATION

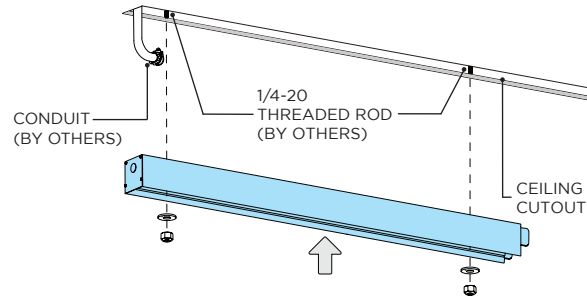

3

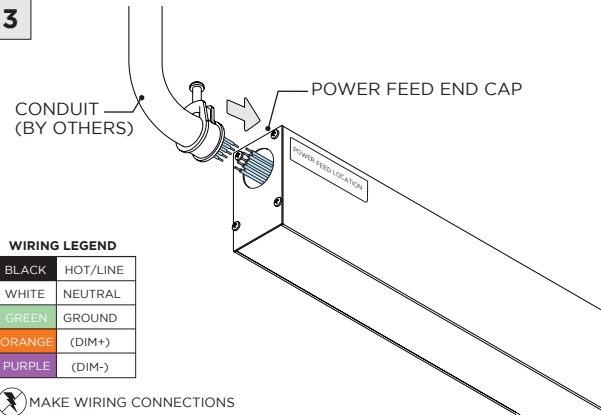


3A **i** IF APPLICABLE:

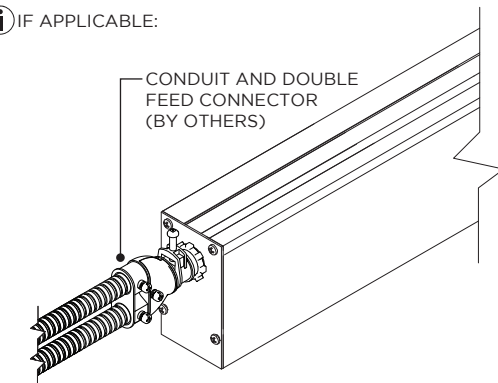


USE DOUBLE FEED CONNECTOR (BY OTHERS) FOR DUAL CIRCUIT

4

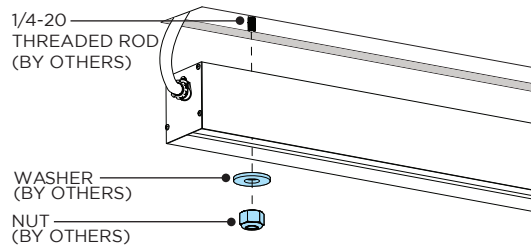


i FOR 3Gi-4RSL-DASY FIXTURES SEE PAGE 3 BEFORE MOUNTING








5 CONNECTING MULTIPLE SECTIONS

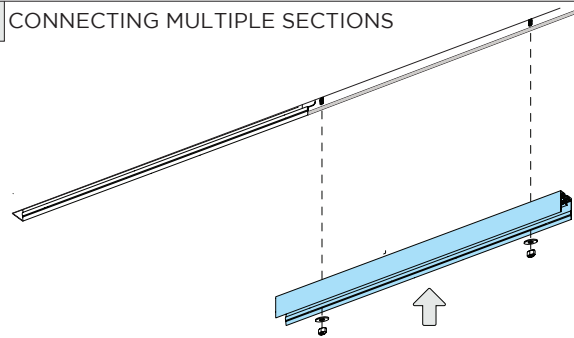






6

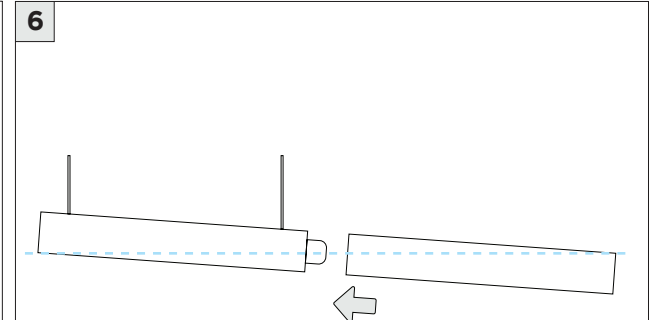








i IF REQUIRED, LOOSEN THREADED ROD BOLTS AND INSTALL NEXT SECTION AT AN ANGLE

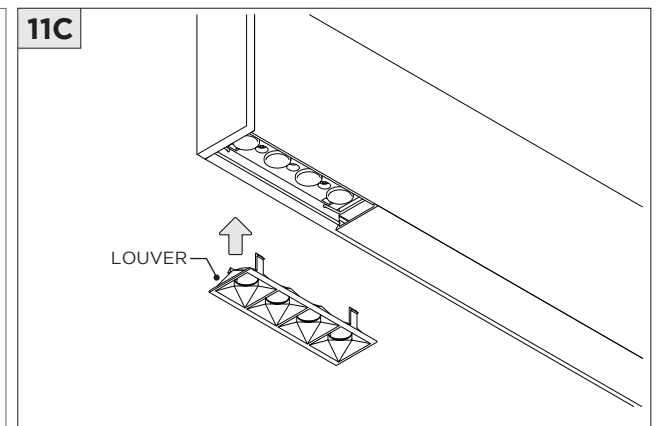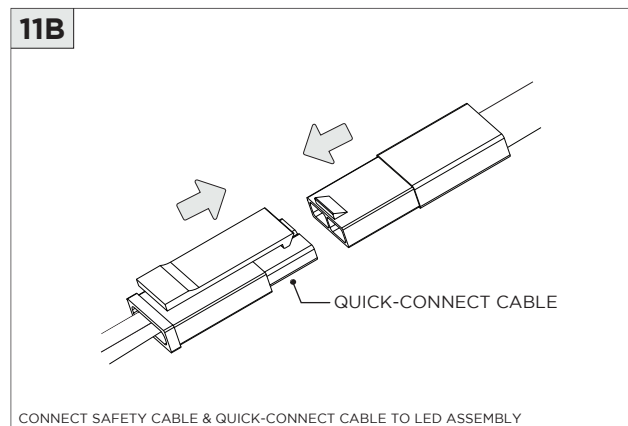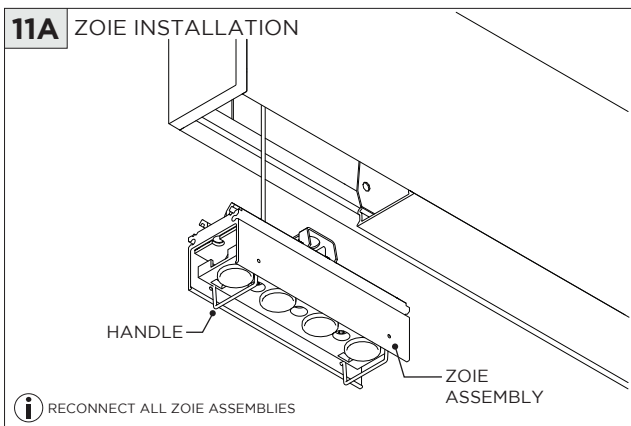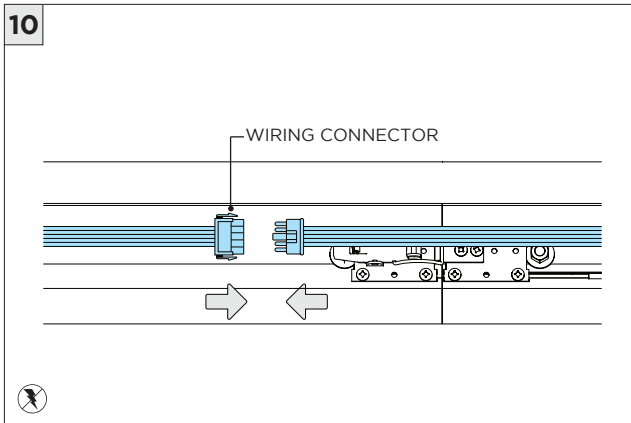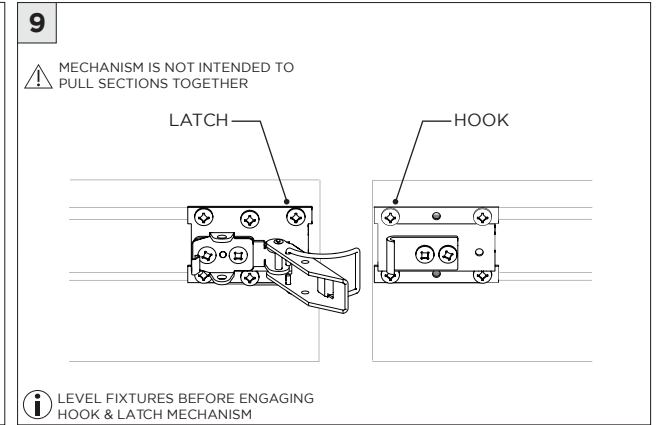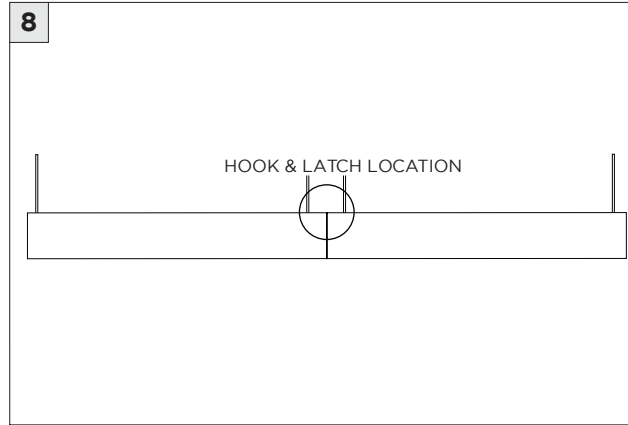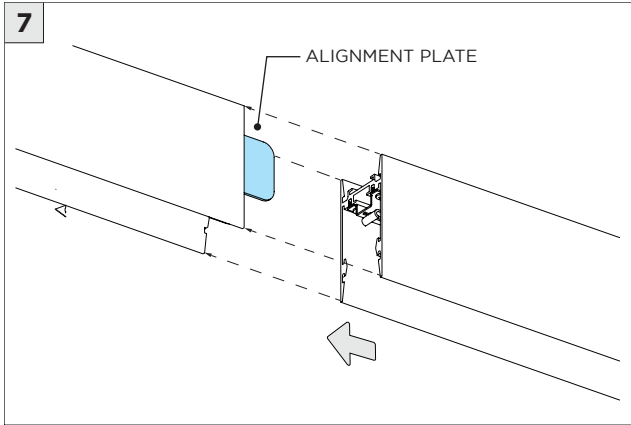

ZOIE SERVICING

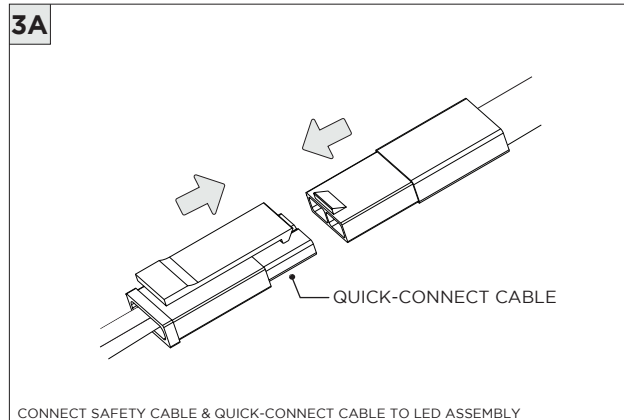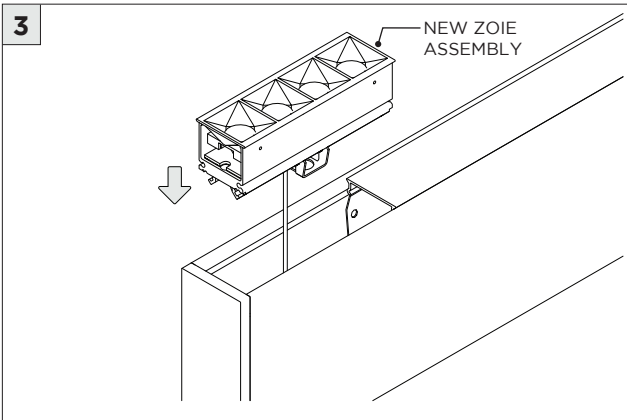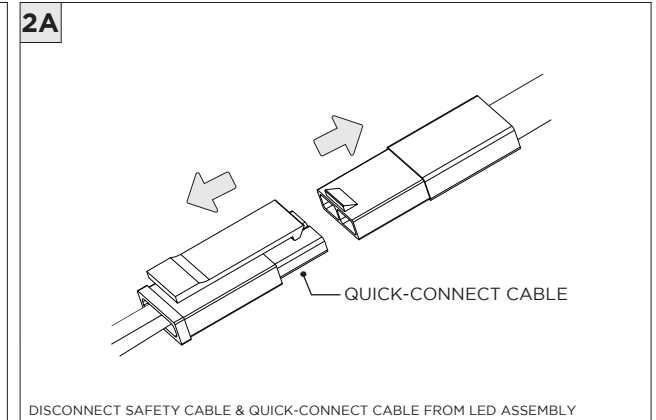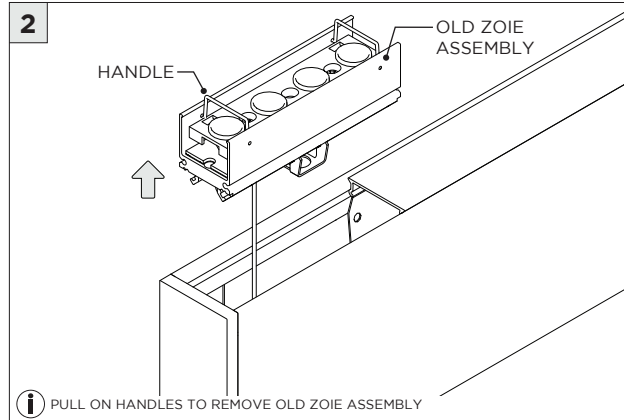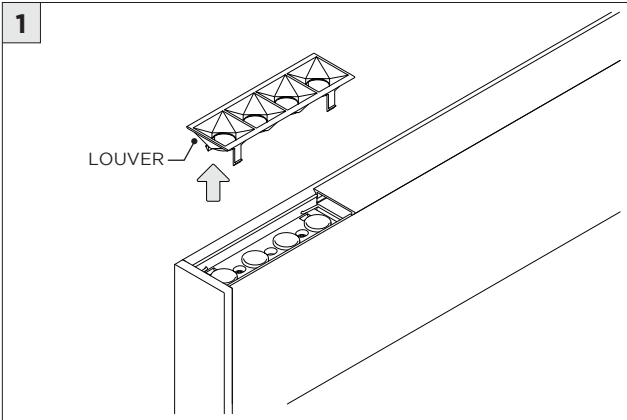

DRIVER SERVICING

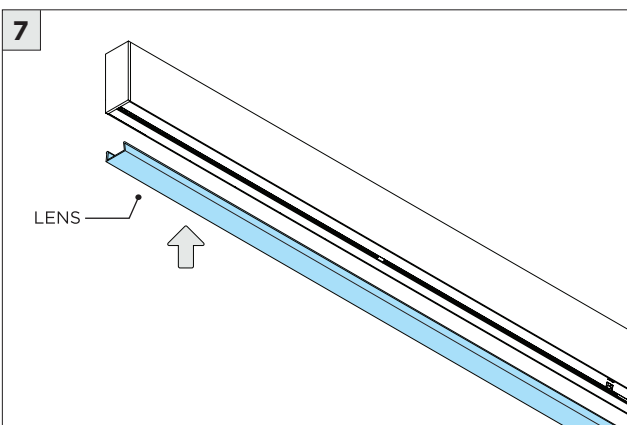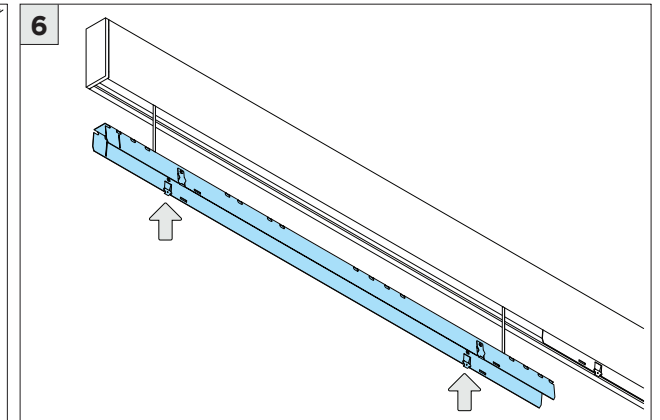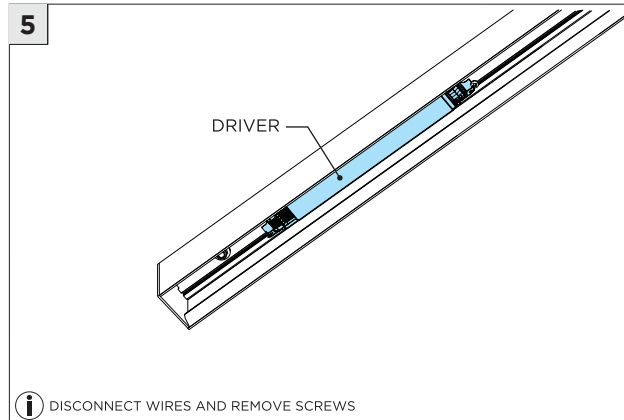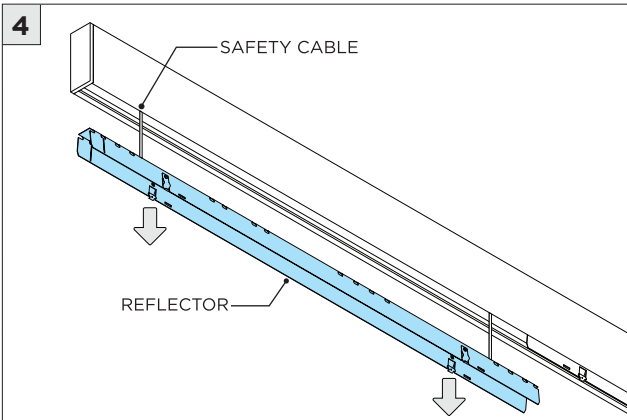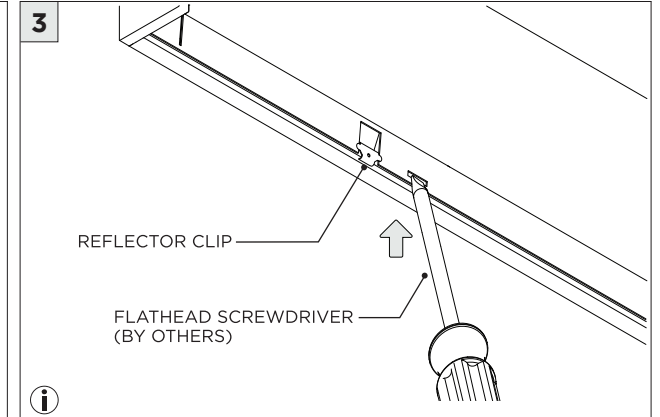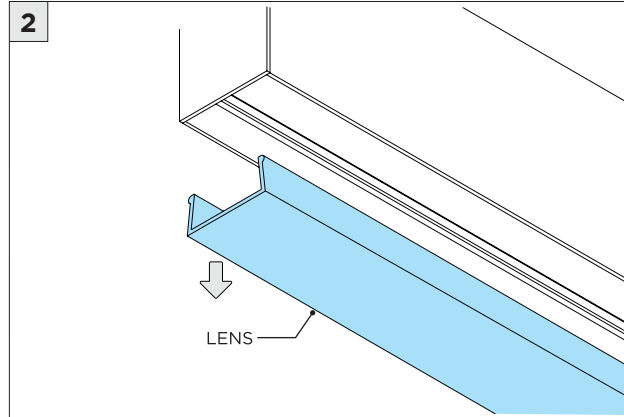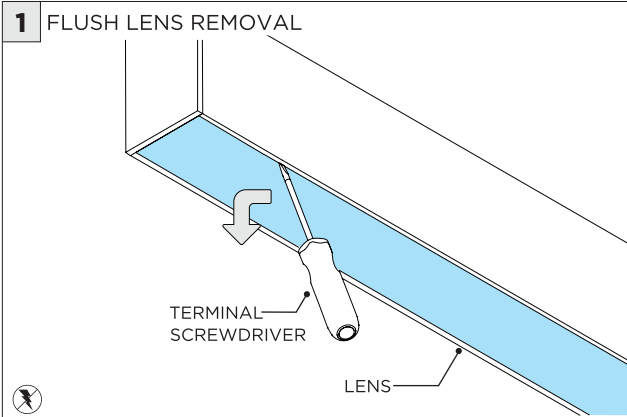

LED SERVICING - DIRECT

