



COMPONENTS

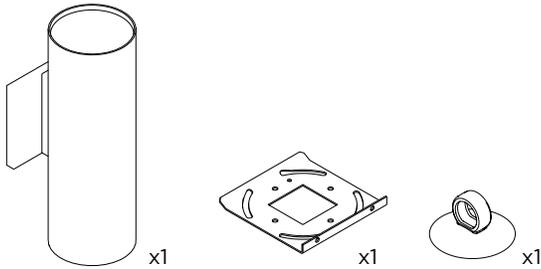

4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

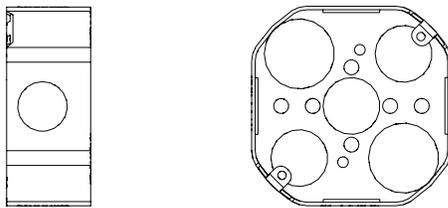


JUNCTION BOX (BY OTHERS)



INSTRUCTION KEY

INFORMATION


- | | | |
|--|------------|--|
| | ADDITIONAL | INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN |
| | ATTENTION | REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION |
| | POWER ON | FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY |
| | POWER OFF | DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS |
| | | TURN OFF POWER DURING INSTALLATION OR SERVICING |

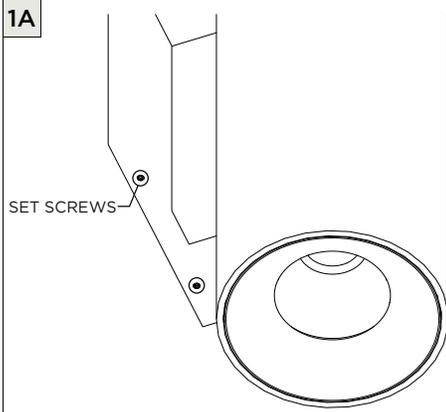



LOOSEN SET SCREWS TO REMOVE CEILING PLATE FROM CANOPY

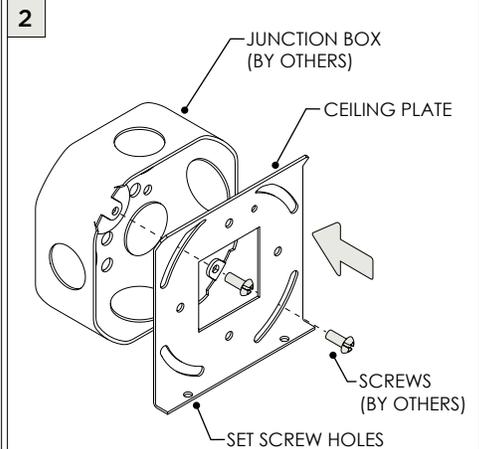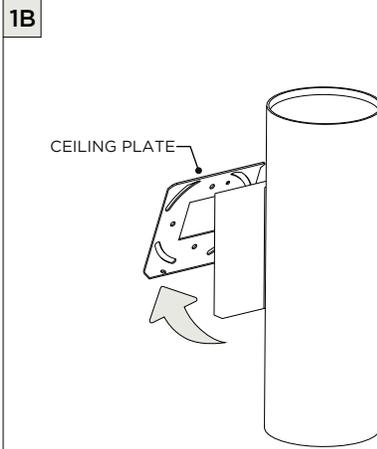



i ENSURE CEILING PLATE IS ORIENTED AS SHOWN

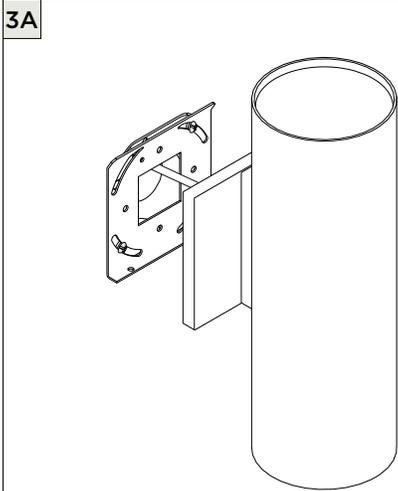

⚡ MAKE WIRING CONNECTIONS INSIDE JUNCTION BOX



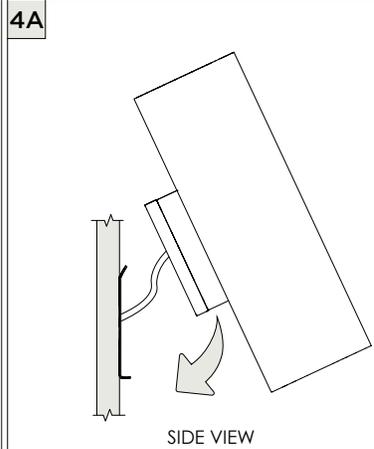
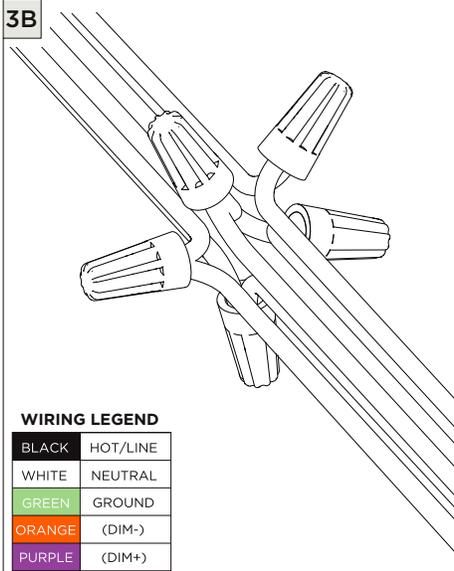


MOUNT CANOPY TO CEILING PLATE

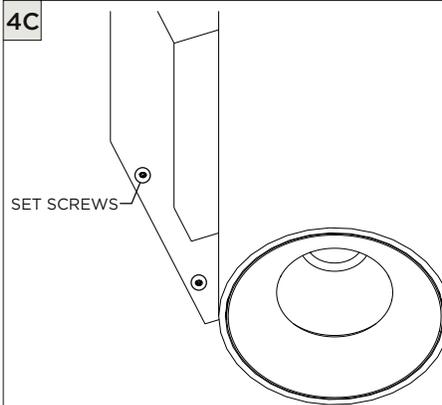
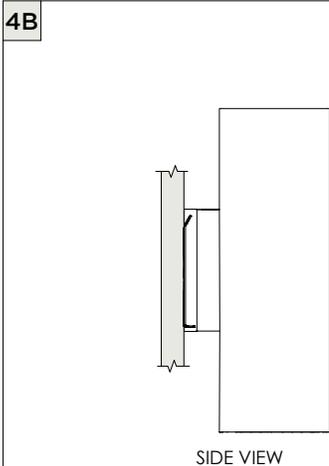


SECURE CANOPY TO CEILING PLATE WITH SET SCREWS



LED SERVICING - WDL33RF - DIRECT - INDIRECT - DIRECT/INDIRECT

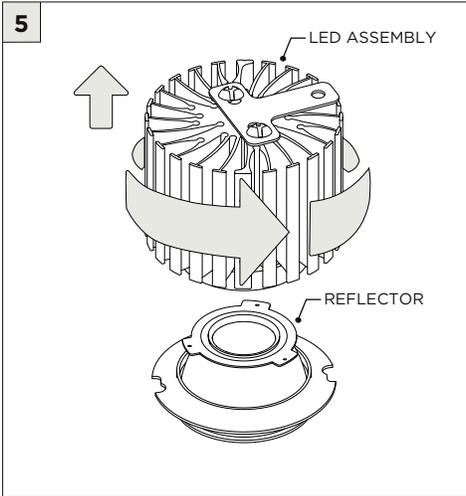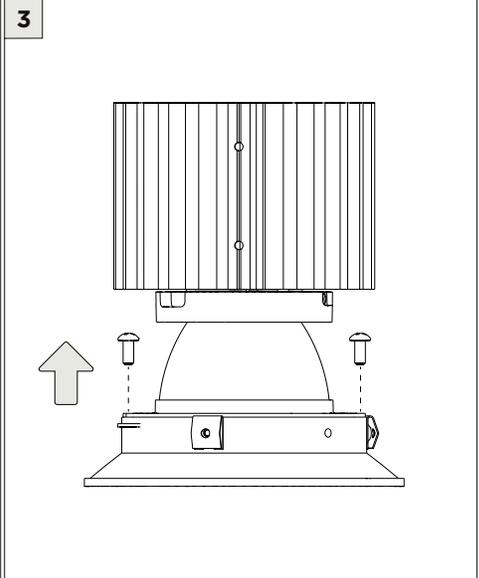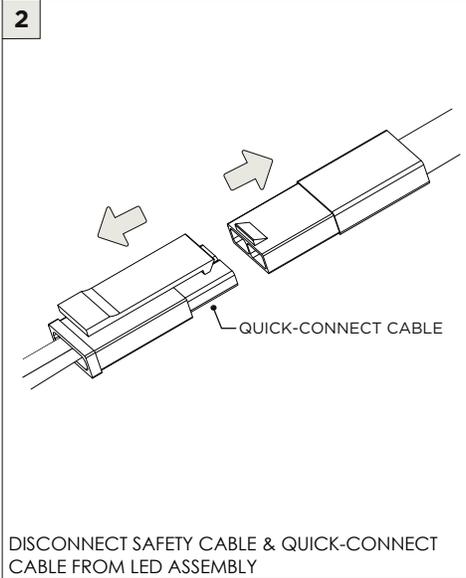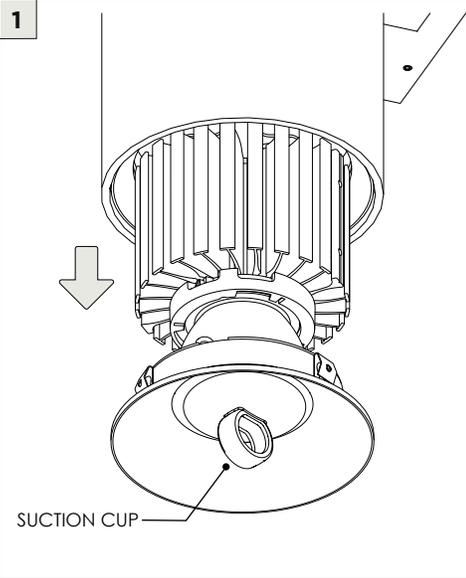


LED SERVICING - WDL45RF - DIRECT - INDIRECT - DIRECT/INDIRECT

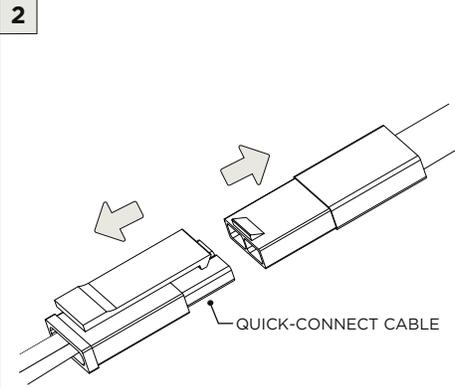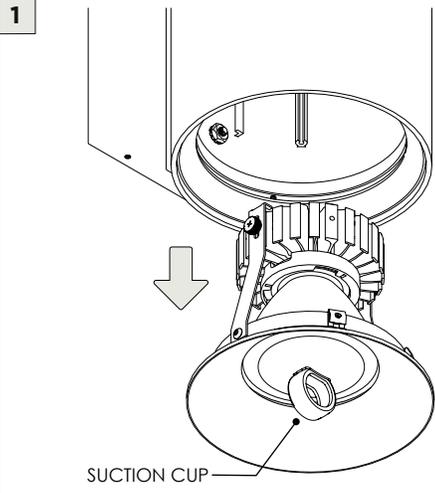

DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

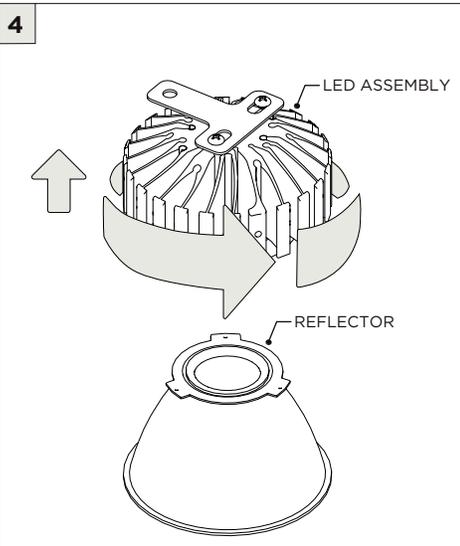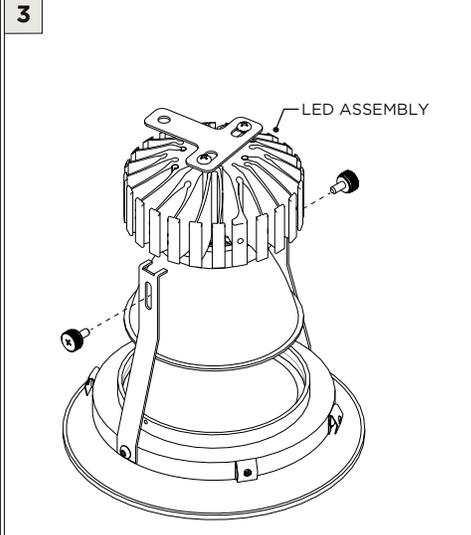

DRIVER SERVICING - WDL33RF - WDL45RF - DIRECT OR INDIRECT ONLY

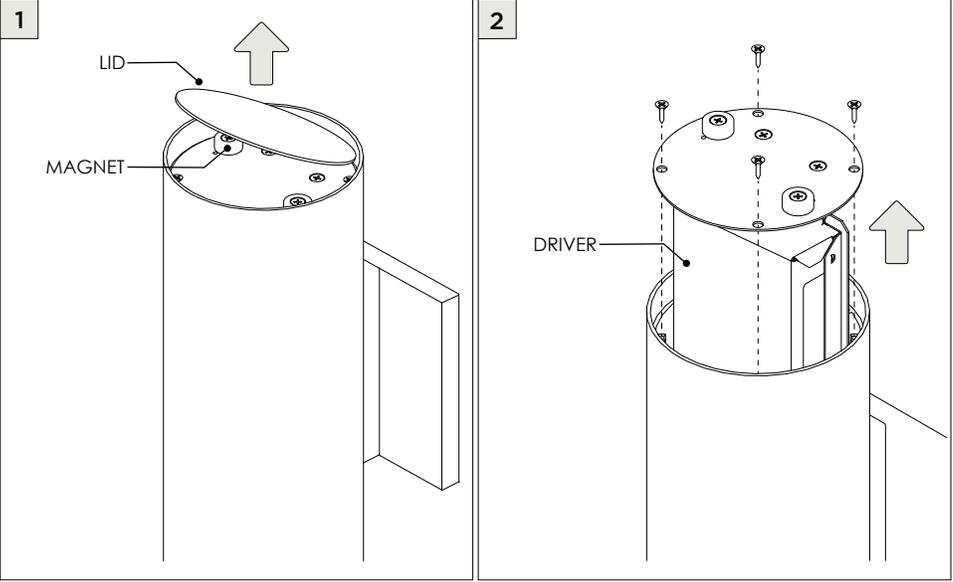

DRIVER SERVICING - WDL33RF - WDL45RF - DIRECT/INDIRECT

