
3G-58RMSL, 3G-48RMSL, 3G-38RMSL
5.8”, 4.8” and 3.8” RECESSED SLOT

GRID CEILING

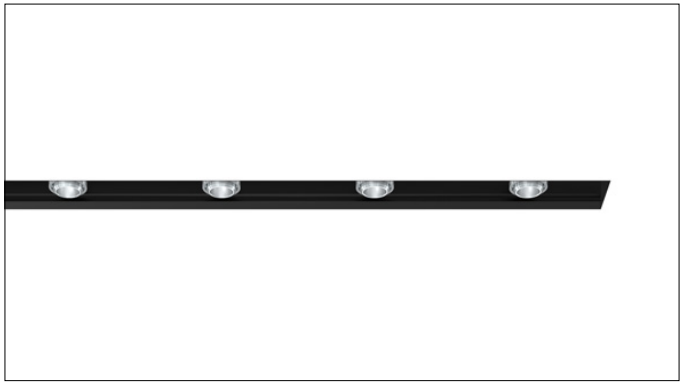


⚠ FOR **NEW CONSTRUCTION** INSTALLATION ONLY


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

FIXTURE TYPES


58RMSL PROFILE




48RMSL PROFILE



38RMSL PROFILE



INCLUDED COMPONENTS

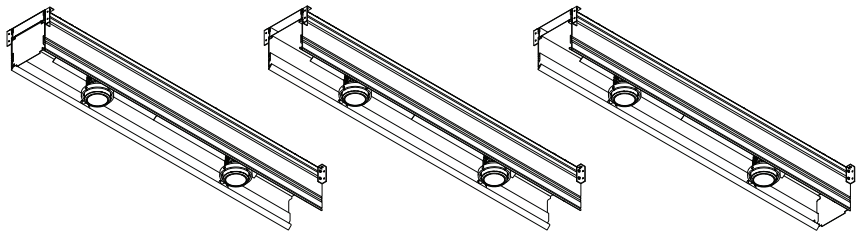


INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ⓘ ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

3G-58RMSL, 3G-48RMSL, 3G-38RMSL
5.8”, 4.8” and 3.8” RECESSED SLOT
GRID CEILING


INSTALLATION INSTRUCTIONS

OVERVIEW


GRID CEILING

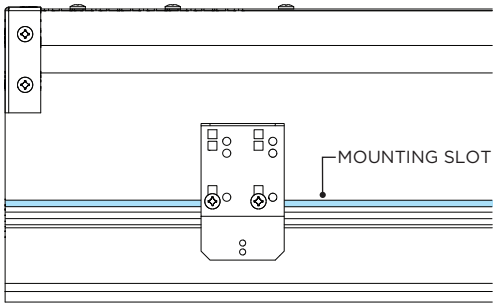


SECURE GRID CEILING BRACKET TO FIXTURE HOUSING
USING HIGHLIGHTED MOUNTING SLOT

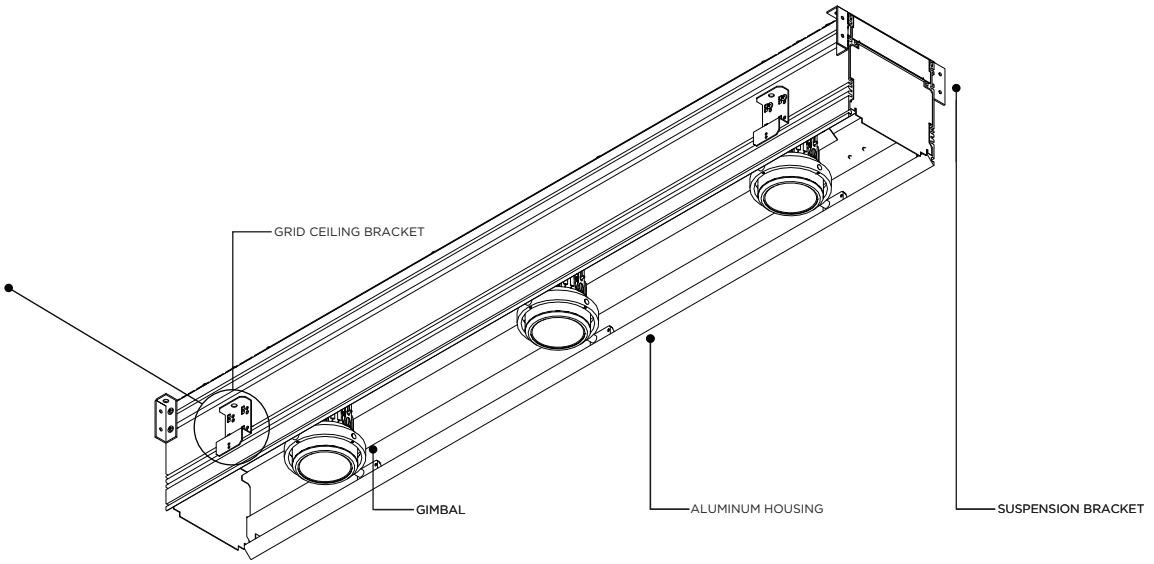

GRID CEILING MOUNTING BRACKET

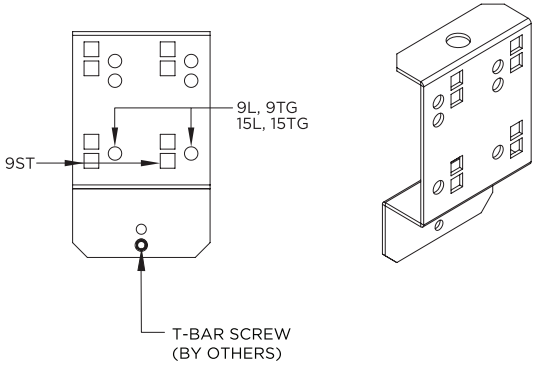


UNIVERSAL MOUNTING BRACKET FOR ALL GRID CEILING TYPES

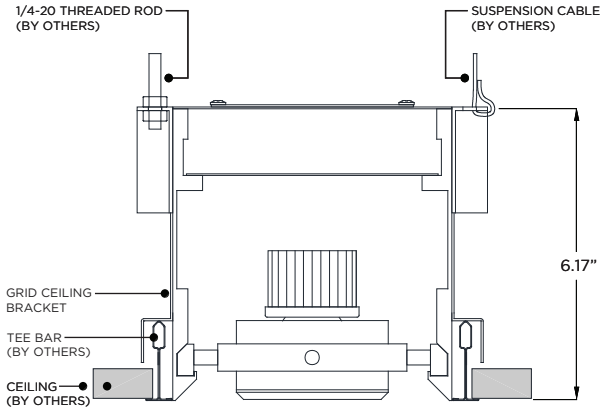


3G-58RMSL, 3G-48RMSL, 3G-38RMSL
5.8”, 4.8” and 3.8” RECESSED SLOT
GRID CEILING

INSTALLATION INSTRUCTIONS


THREADED ROD LOCATION

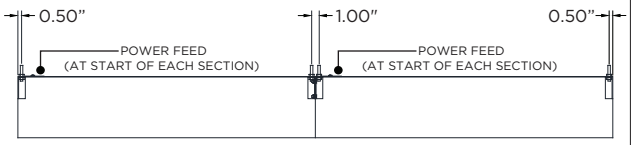

IDENTIFICATION AND PREPARATION

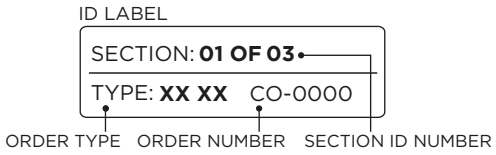


IDENTIFY FIXTURE SECTIONS BY THE ID LABELS FOUND ON THE BOX INSIDE THE SECTIONS

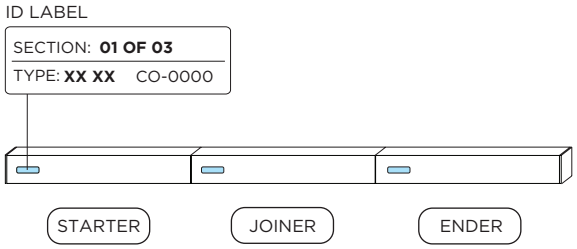


OVERVIEW

3Gi-58RMSL


9L - 9/16" LAYIN




9TG - 9/16" TEGULAR




15L - 15/16" LAYIN




15TG - 15/16" TEGULAR



9ST - 9/16" SLOT TEE TEGULAR




6TZ - TECHZONE




3Gi-48RMSL


9L - 9/16" LAYIN




9TG - 9/16" TEGULAR




15L - 15/16" LAYIN



15TG - 15/16" TEGULAR




9ST - 9/16" SLOT TEE TEGULAR




OVERVIEW

3Gi-38RMSL


9L - 9/16" LAYIN




9TG - 9/16" TEGULAR




15L - 15/16" LAYIN



15TG - 15/16" TEGULAR



9ST - 9/16" SLOT TEE TEGULAR




3G LIGHTING

3G-58RMSL, 3G-48RMSL, 3G-38RMSL
5.8", 4.8" and 3.8" RECESSED SLOT
GRID CEILING


INSTALLATION INSTRUCTIONS

1

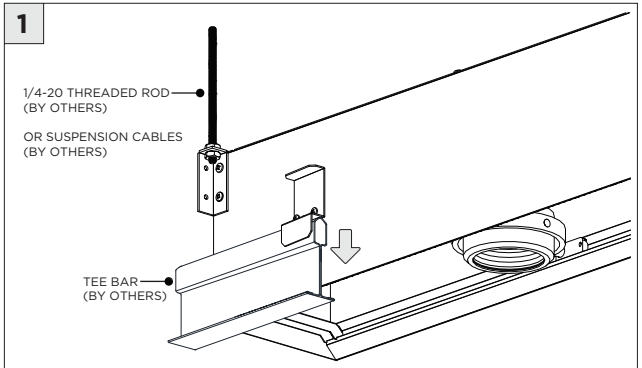


PLACE FIXTURE ON TEE BARS
SECURE STARTER SECTION TO CEILING WITH
THREADED RODS (BY OTHERS)
OR SUSPENSION CABLES (BY OTHERS)

2

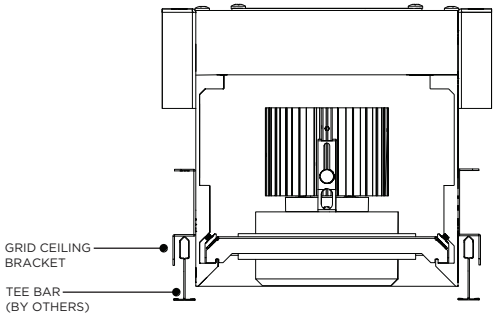

SECURE FIXTURE TO CEILING BY RESTING GRID SUPPORT
BRACKETS ON GRID FRAME

3

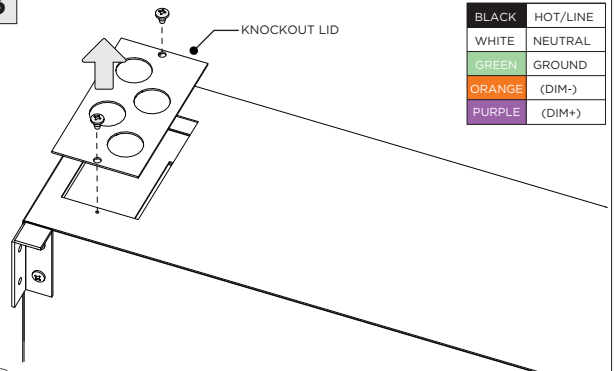


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


REMOVE KNOCKOUT LID AND MAKE
WIRING CONNECTIONS INSIDE FIXTURE

4

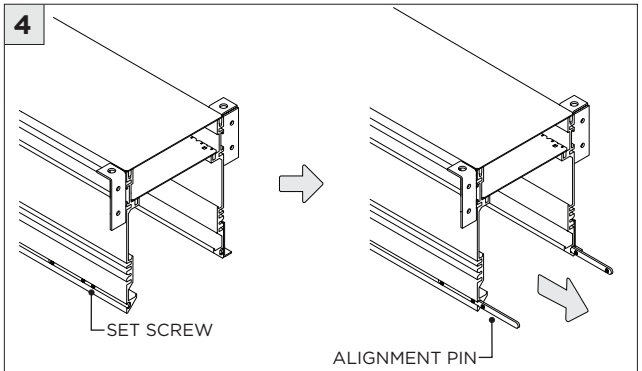


LOOSEN SET SCREW TO PULL OUT ALIGNMENT PIN FROM HOUSING
DO NOT REMOVE ENTIRELY

5

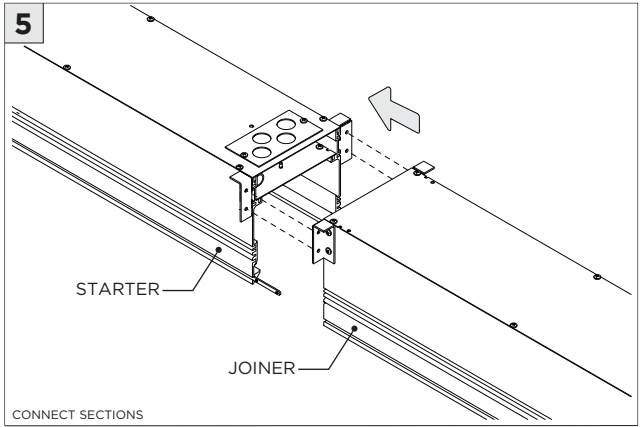


CONNECT SECTIONS

6

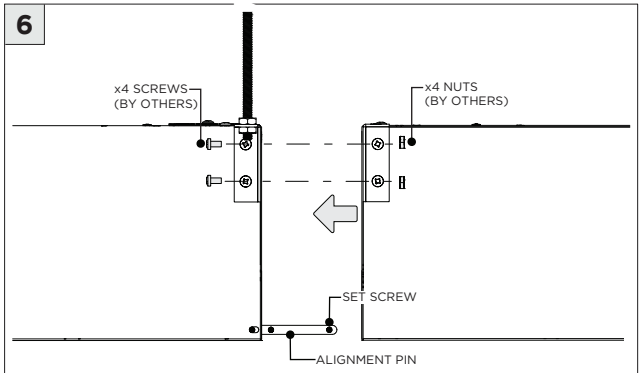

ALIGN SECTIONS WITH ALIGNMENT PINS
SECURE WITH **8-32** SCREWS AND NUTS (BY OTHERS
TIGHTEN ALIGNMENT PIN SET SCREWS

7

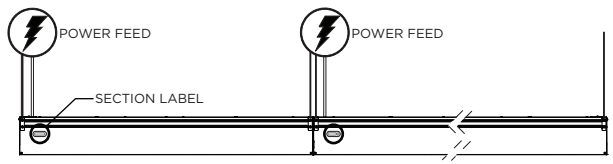


STARTER → JOINER X → JOINER X → ENDER

ARRANGE SECTIONS BY CORRECTLY ORDERING LABELS


⚠ EACH SECTION MUST BE INDIVIDUALLY POWERED

8 SPACER REMOVAL

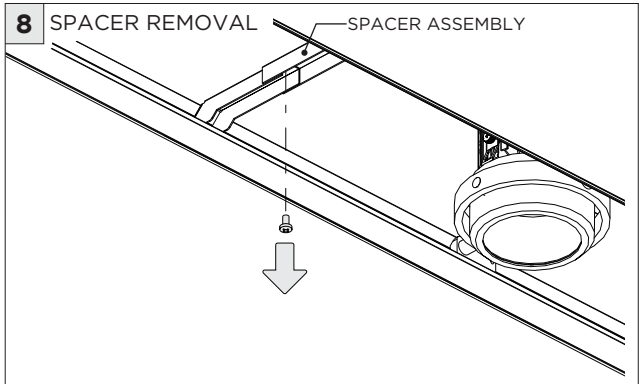


⚠ DO NOT TWIST SPACER TO AVOID SCRATCHING PAINT

9

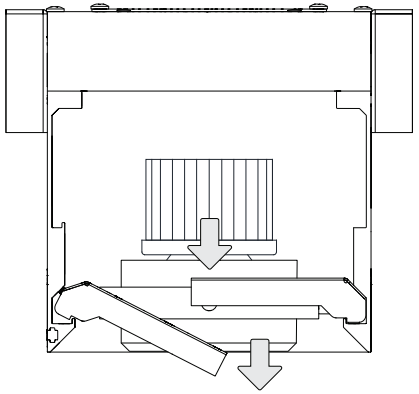


LED SERVICING - 48/58RMSL

1

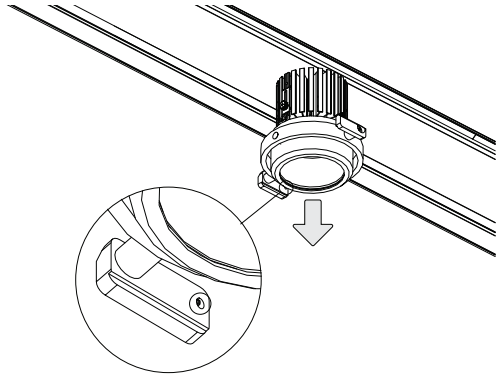


2

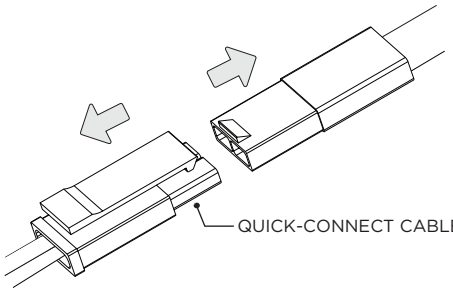


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

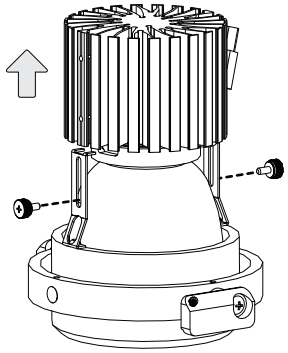


4

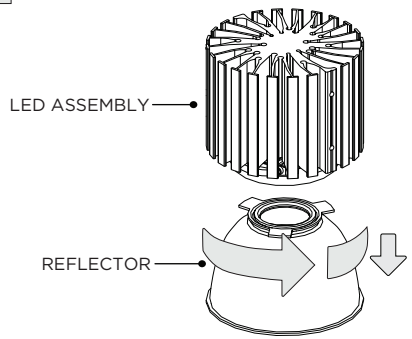


TWIST REFLECTOR TO REMOVE FROM LED ASSEMBLY

LED SERVICING - 38RMSL

1

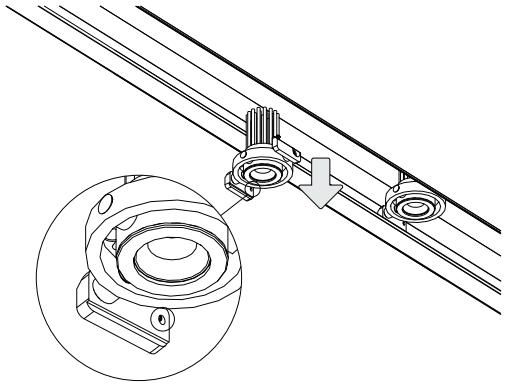


2

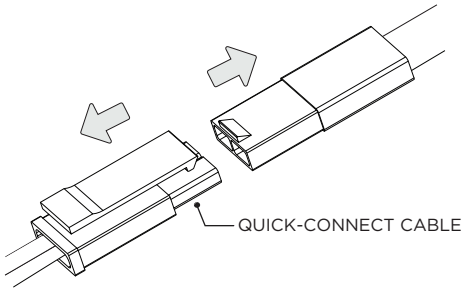


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

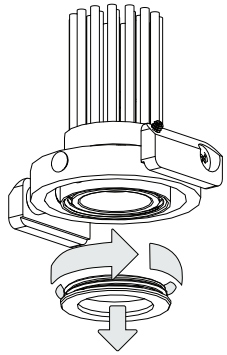


4

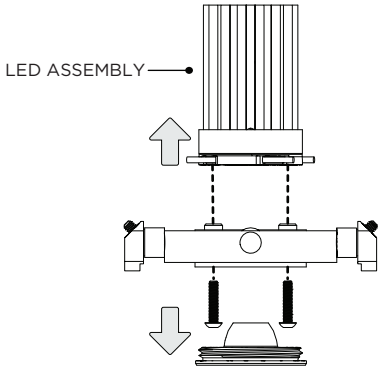


DRIVER SERVICING - 38/48/58RMSL

1

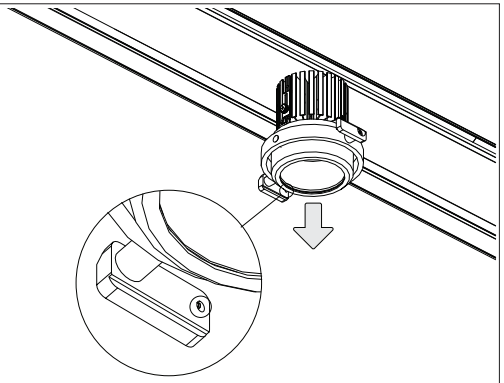


2

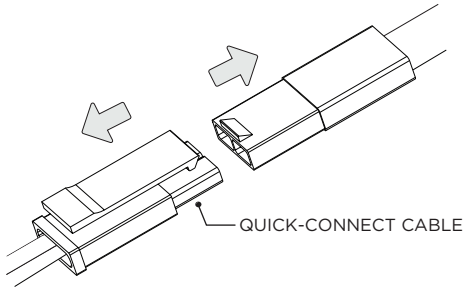


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

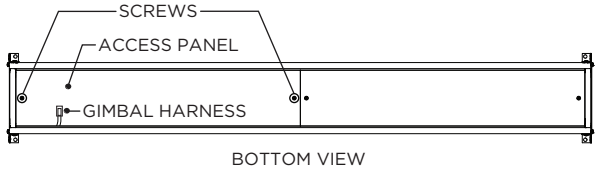


FOLLOW THE GIMBAL HARNESS TO THE CORRECT ACCESS PANEL

4

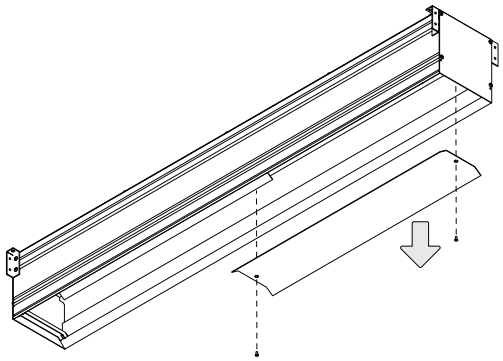

REMOVE PANEL TO ACCESS DRIVERS

5

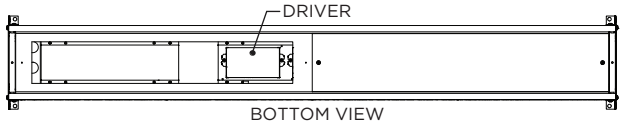


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

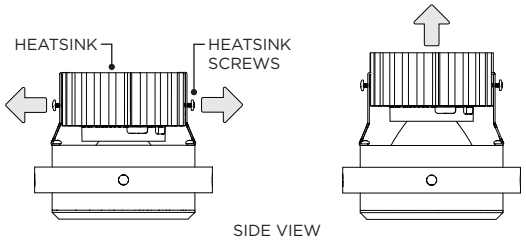


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR OPTICAL ACCESSORY CLEARANCE

2

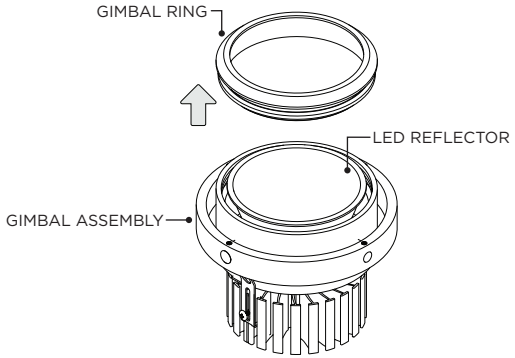


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

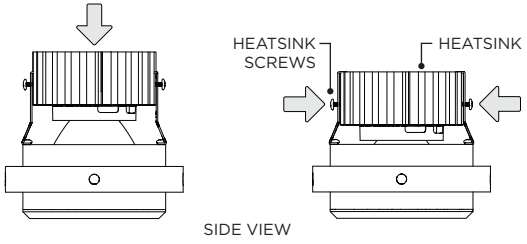

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS