
3G-RC1-5RD, 3G-RC2-5RD
3G-RC1M5-4RD, 3G-RC2M5-4RD

1 LIGHT, 2 LIGHT ROUND MADISON
TRIMLESS




ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


INCLUDED COMPONENTS	
NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)	



LED INSERT (RC1 SHOWN)



NEW CONSTRUCTION HOUSING (RC1 SHOWN)



BAR HANGERS (OPTIONAL)


INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

3G LIGHTING


3G-RC1-5RD, 3G-RC2-5RD
3G-RC1M5-4RD, 3G-RC2M5-4RD
1 LIGHT, 2 LIGHT ROUND MADISON TRIMLESS

INSTALLATION INSTRUCTIONS


1

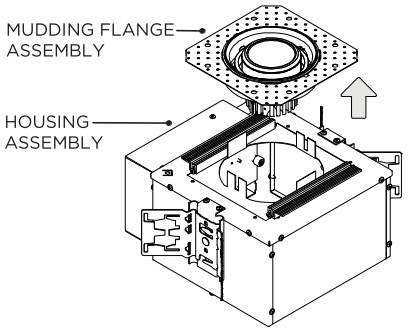


2

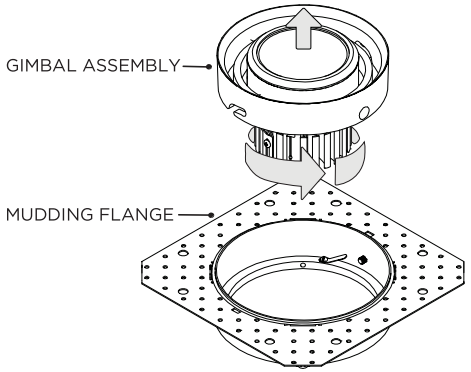


3 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

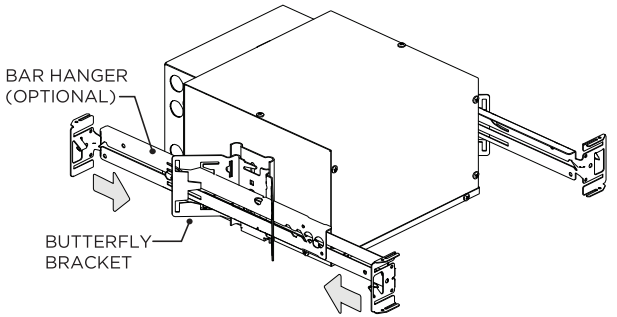

3A

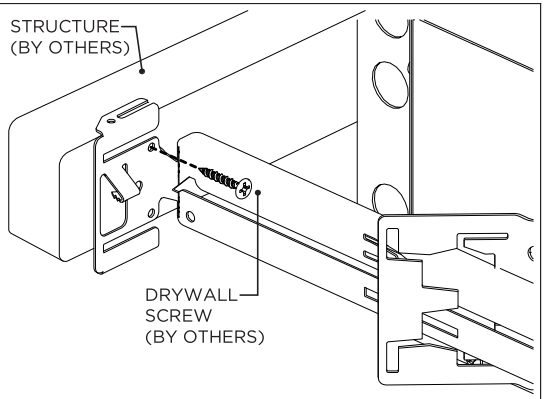


4 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

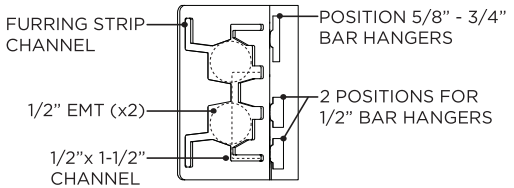

BUTTERFLY BRACKET
SIDE VIEW


5 CEILING CUTOUT DIMENSIONS



FIXTURE TYPE	CEILING HOLE SIZE
RC1-5RD	Ø5.50"
RC2-5RD	12.91" x 5.41"
RC1M5-4RD	Ø4.38"
RC2M5-4RD	10.37" x 4.30"


INSTALL CEILING BELOW FIXTURE

6

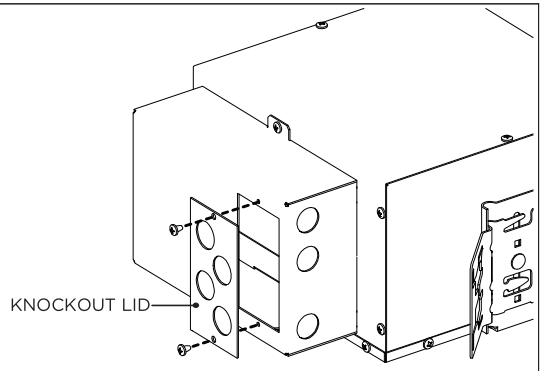

REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

6A

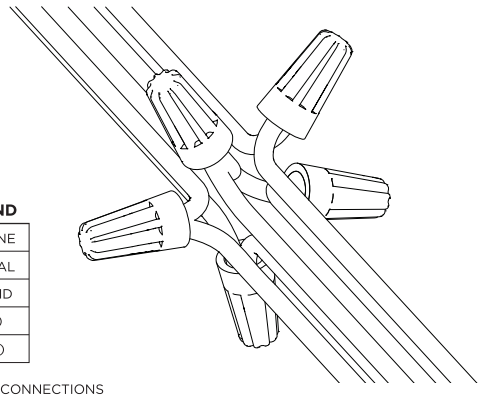


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


7

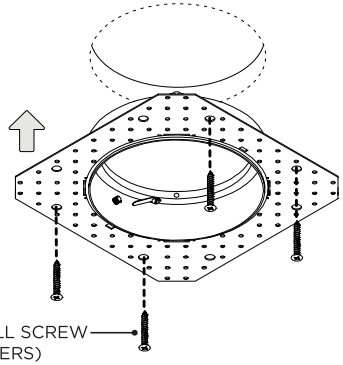

8

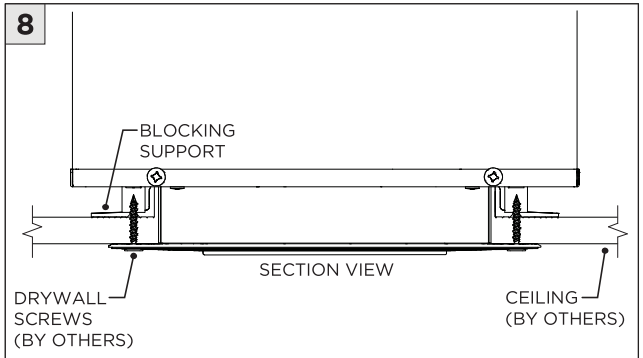


9

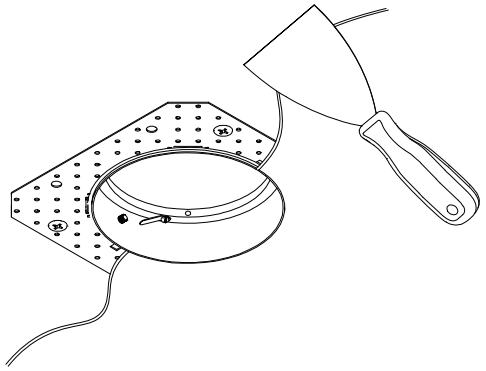


APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING

10

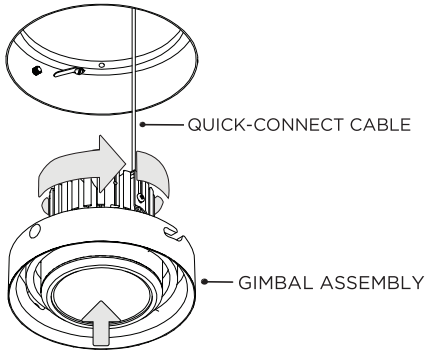

INSERT GIMBAL ASSEMBLY INTO CEILING

10A

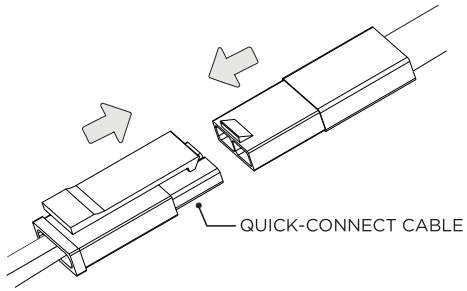


CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

3G-RC1-5RD, 3G-RC2-5RD
3G-RC1M5-4RD, 3G-RC2M5-4RD
1 LIGHT, 2 LIGHT ROUND MADISON
TRIMLESS


DRIVER SERVICING

1 **NC/IC -** NEW CONSTRUCTION HOUSING

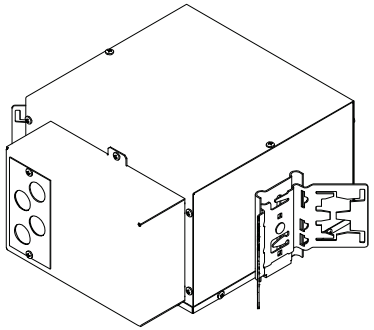


DISCONNECT POWER BEFORE SERVICING

2

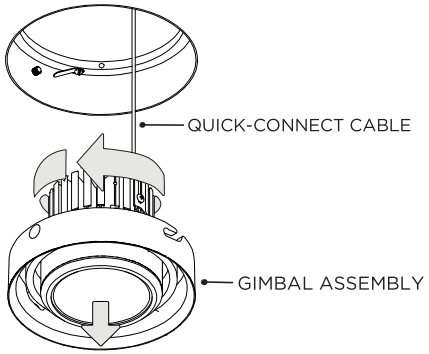


REMOVE GIMBAL ASSEMBLY FROM CEILING

2A

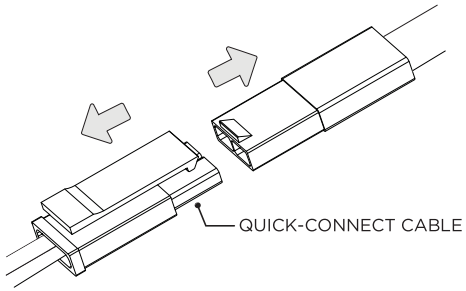


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

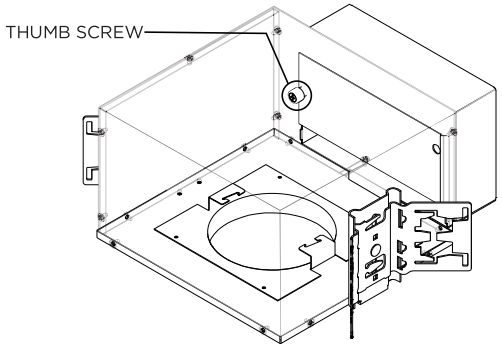


4

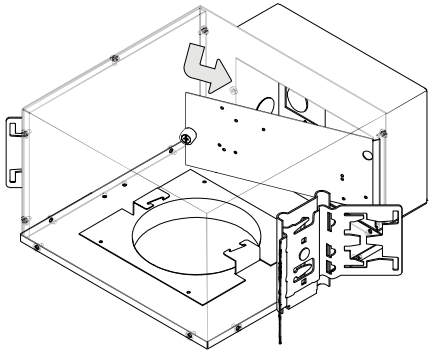

5

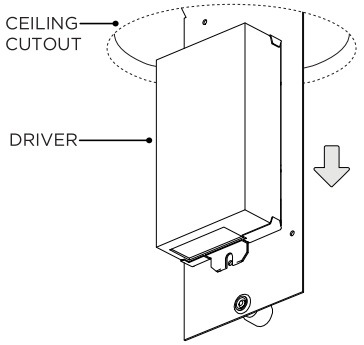

5A

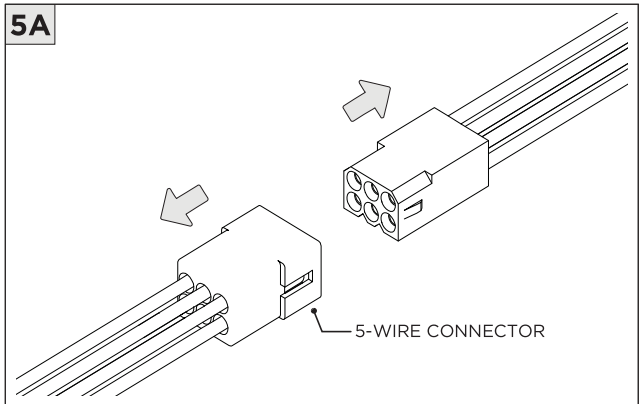


DISCONNECT 5-WIRE CONNECTOR

3G-RC1-5RD, 3G-RC2-5RD
3G-RC1M5-4RD, 3G-RC2M5-4RD
1 LIGHT, 2 LIGHT ROUND MADISON
TRIMLESS


LED SERVICING

1

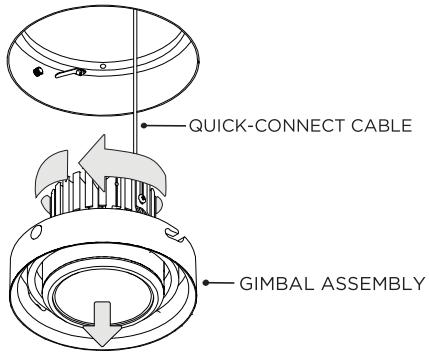


DISCONNECT POWER BEFORE SERVICING
REMOVE GIMBAL ASSEMBLY FROM CEILING

2

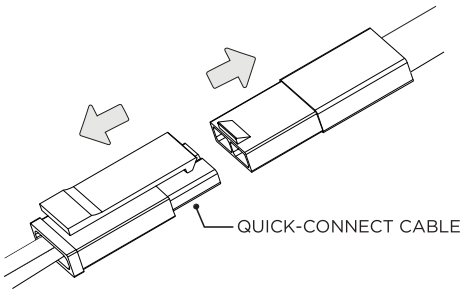


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

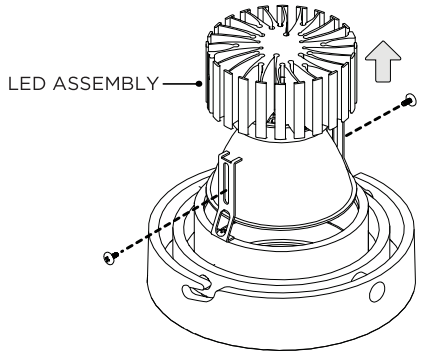


4

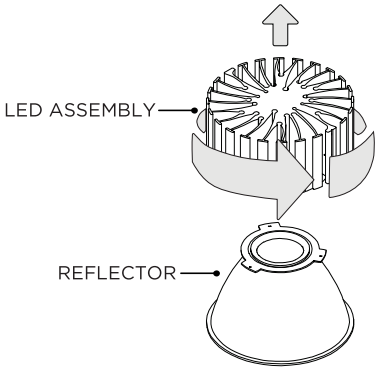


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

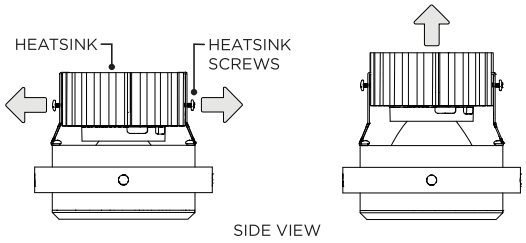


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR OPTICAL ACCESSORY CLEARANCE

2

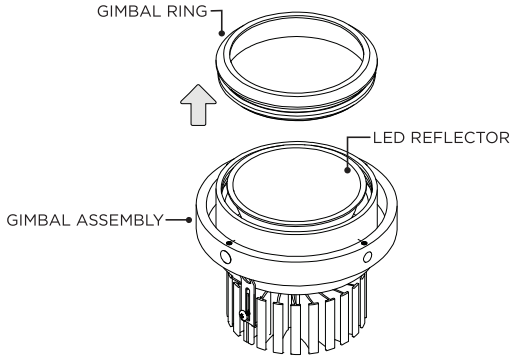


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

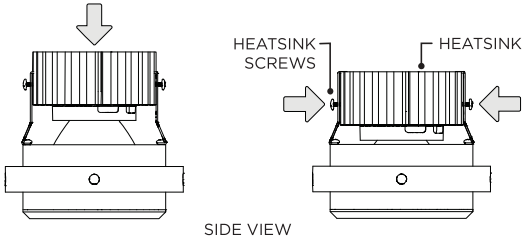

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS