






3G-RC1-5RD, 3G-RC2-5RD
3G-RC1M5-4RD, 3G-RC2M5-4RD

1 LIGHT, 2 LIGHT ROUND MADISON
TRIM




i THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


INCLUDED COMPONENTS	
NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)	
	
LED INSERT	NEW CONSTRUCTION HOUSING
	
BAR HANGERS (OPTIONAL)	

INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
 ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
 POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING


1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

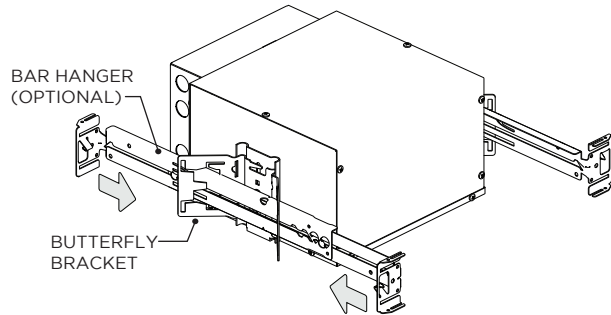


1A

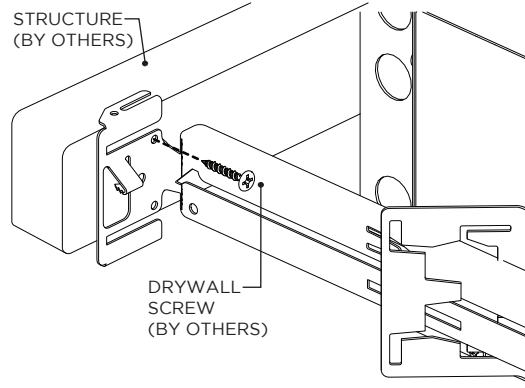

2 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

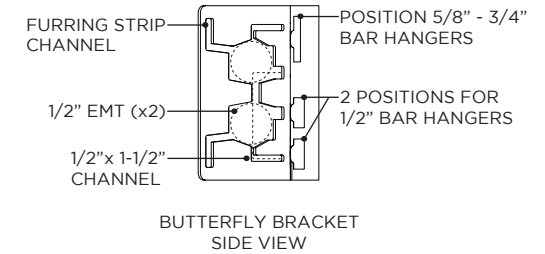


3

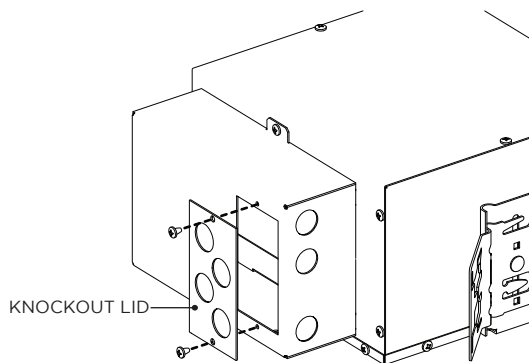


REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

3A

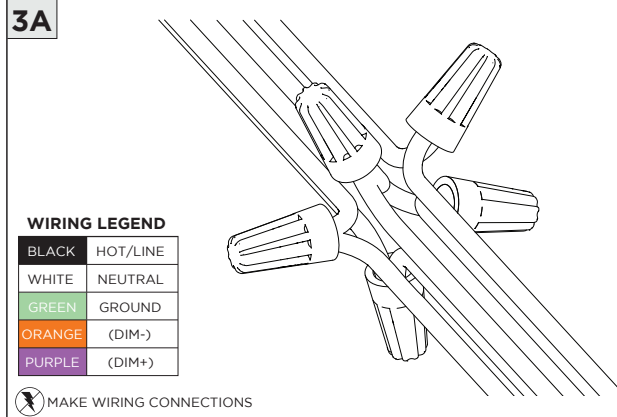


4 RC1 - CEILING CUTOUT DIMENSIONS



FIXTURE TYPE	CEILING HOLE SIZE
RC1-5RD	Ø5.92
RC1M5-4RD	Ø4.92

INSTALL CEILING BELOW FIXTURE


5 RC2 - CEILING CUTOUT DIMENSIONS

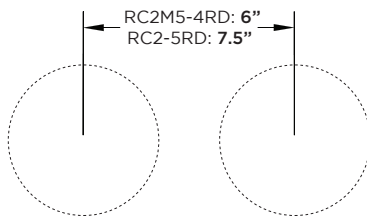

FIXTURE TYPE	CEILING HOLE SIZE
RC2-5RD	Ø5.92
RC2M5-4RD	Ø4.92


INSTALL CEILING BELOW FIXTURE

6

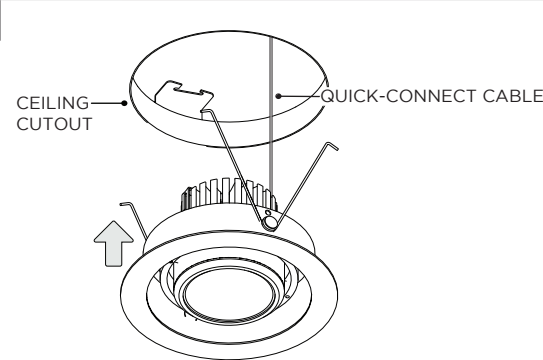


INSERT LED ASSEMBLY INTO CEILING

6A

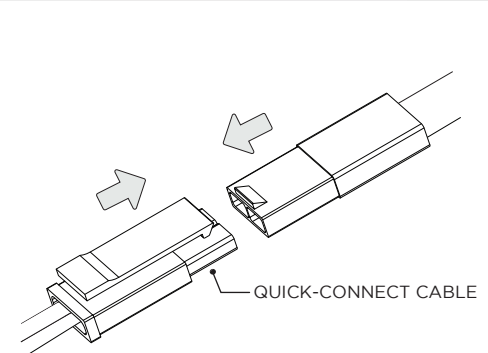


CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

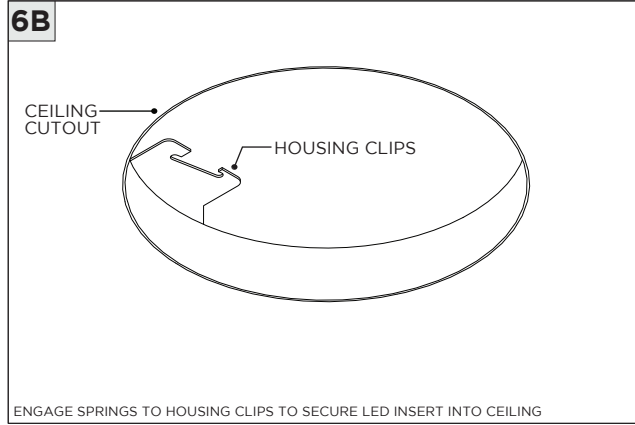


DRIVER SERVICING

1 NC/IC - NEW CONSTRUCTION HOUSING

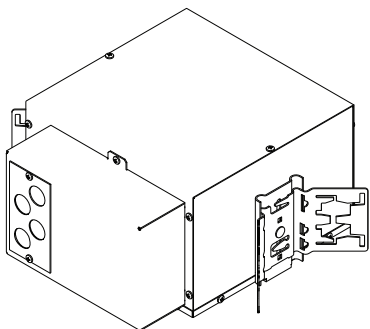


⚡ DISCONNECT POWER BEFORE SERVICING

2

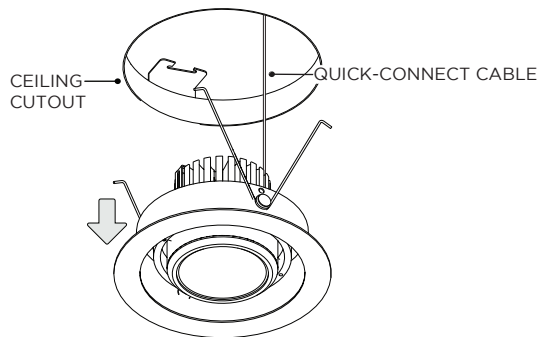


REMOVE LED ASSEMBLY FROM CEILING

2A

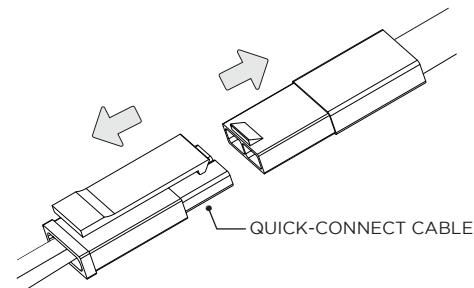


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

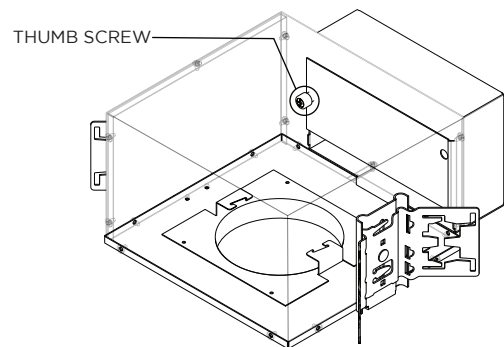


4

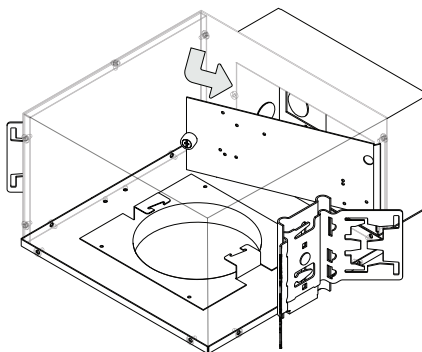

5

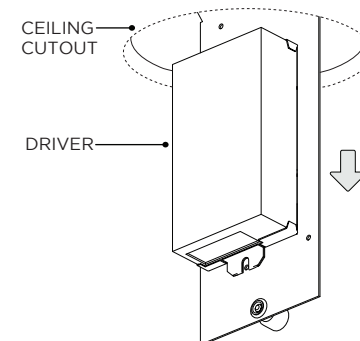


5A

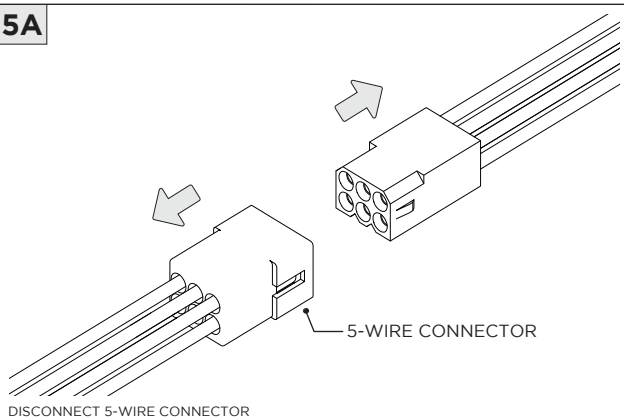

DISCONNECT 5-WIRE CONNECTOR


LED SERVICING

1

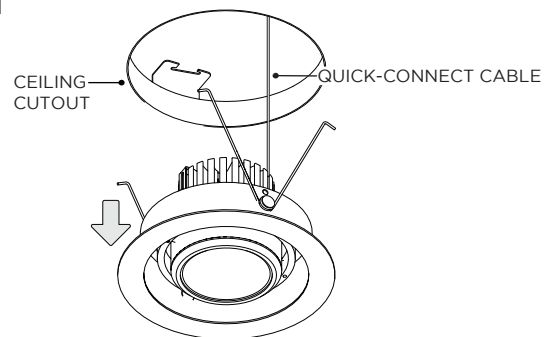


REMOVE LED ASSEMBLY FROM CEILING

2

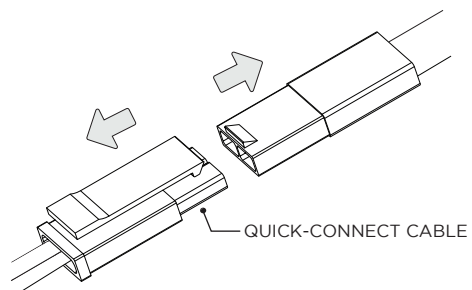


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

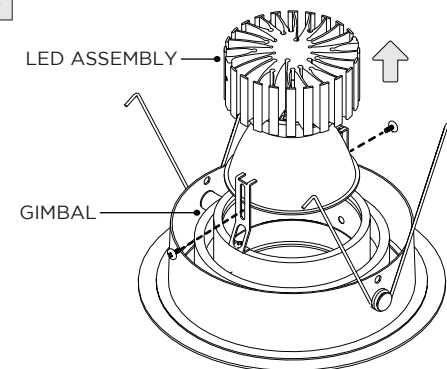

4

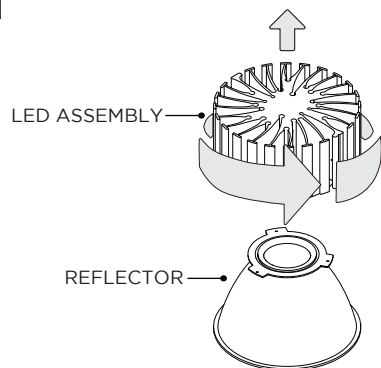


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR
SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

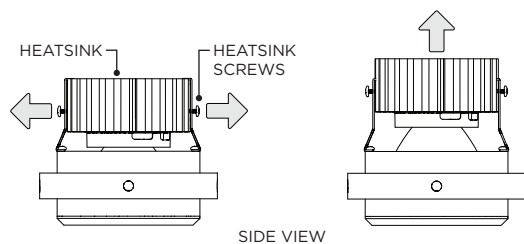


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR
OPTICAL ACCESSORY CLEARANCE

2

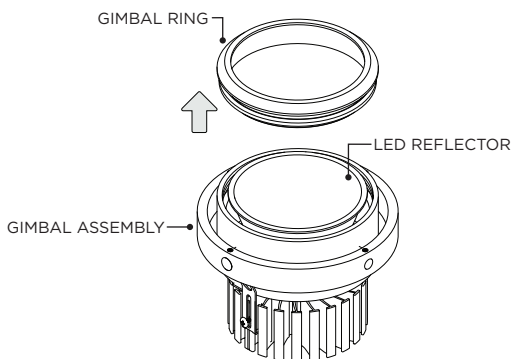


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

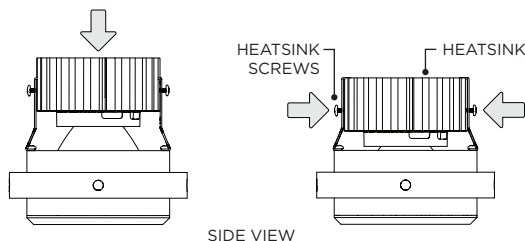

SIDE VIEW

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS