3G-2PLI-D

2" LINEAR PENDANT, DIRECT
TUNABLE WHITE & RGBW



Narrow 2" aperture with one piece extruded aluminum housing
Individual or continuous runs available in multiple run configurations
Direct distribution with multiple lumen output options
LED system with performance up to 119 lumens per watt
Extruded acrylic lens available in flush, 1" and 2" drop lens options
Asymmetric optics available
1% dimming standard with several integral driver options

3GT 3GB

ORDERING INFORMATION

PROJECT:		**TYPE:**	
CATALOG #:		**DATE:**	

CAT. NO	LED SOURCE	LUMEN OUTPUT	CRI	VOLTAGE
3G-2PLI-D	**TW** - TUNABLE WHITE (2700K-6500K) **RGBW** - INFINITE COLOUR [1] (3500K WHITE)	**D250** - LOW OUTPUT (250 LM/FT) [2] **D500** - MEDIUM OUTPUT (500 LM/FT) **D750** - HIGH OUTPUT (750 LM/FT) **D1000** - VERY HIGH OUTPUT (1000 LM/FT) [3] **DC____** - CUSTOM OUTPUT (SPECIFY LM/FT)* *Specify custom lumen outputs in 50lm increments (ie: DC600, DC650, DC700) Custom output cannot exceed DC1000 Lumen outputs suitable for white LED source only	**S80** - 83+ CRI **H90** - 93+ CRI [1]	**UNV** - 120/277V

DRIVER	LENS OPTION	FINISH	CABLE LENGTH
D01 - 0-10V (100-0.1%) **DALI** - DALI (eldoLED, 100-1%) **DMX** - DMX (eldoLED, 100-0%) [1] **DHLT** - LUTRON T SERIES (100-1%) (2 CHANNEL TUNABLE WHITE)	**FL** - FLUSH **DD1** - 1" DROP LENS [4] **DD2** - 2" DROP LENS [4] **DASY** - ASYMMETRIC OPTIC [1]	**WH** - WHITE (STANDARD) **SV** - SILVER **BK** - BLACK All mounting canopies provided in white as standard	**60** - 60" (STANDARD) **120** - 120"

OPTIONS	LENGTH (FEET)
EMC - EMERGENCY CIRCUIT [5]	**S** - ____' (STRAIGHT RUN)* **L** - ____'X ____' (L-SHAPE) **U** - ____'X ____' X ____' (U-SHAPE) **R** - ____'X ____' (RECTANGLE/SQUARE) **T** - ____'X ____' (T-SHAPE) **X** - ____'X ____' (X-SHAPE) **CUS** - ____ (CUSTOM LAYOUT - PROVIDE DRAWING) *Individual units available from 2' to 8' Continuous runs available in 1' increments

1 RGBW LED source available with S80 (83 +CRI) and DMX driver option only. Not available with asymmetric optic or EM options
2 D250 (250LM/FT) not available in 2' and 3' lengths. Specify DC400 for 2' and 3' fixture lengths when outputs lower than 500LM/FT are required
3 D1000 (1000LM/FT) not available for H90 (93+ CRI)
4 DD1 (1" drop lens) and DD2 (2" drop lens) available with straight run type only
5 EMC (emergency circuit) options available for tunable white LED source only. Not available with RGBW

3GT - Tunable White
3GB - RGBW

JANUARY 4, 2024

Copyright 2019 3G Lighting | **www.3glighting.com** | **P:** 905-850-2305 **TF:** 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.

5 YEAR LIMITED WARRANTY

3G-2PLI-D

2" LINEAR PENDANT, DIRECT
TUNABLE WHITE & RGBW


PERFORMANCE CHART BASED ON 4' LENGTH WITH FLUSH LENS (TUNABLE WHITE AND 83+ CRI)

COLOR TEMP	DELIVERED LUMENS (LM/FT)	SYSTEM WATTS (W/FT)	EFFICACY (LPW)
2700K	250	2.3	104
	500	4.6	100
	750	7.0	99
	1000	9.7	98
3500K	250	2.3	111
	500	4.6	108
	750	7.0	105
	1000	9.7	102
6500K	250	2.3	119
	500	4.6	118
	750	7.0	113
	1000	9.7	107

EFFICACY (LPW) ADJUSTMENT FACTOR	CRI	Multiplier
	93+	0.88

PHOTOMETRY BASED ON 4' LENGTH (83+ CRI AND 3500K SOURCE)


FL - FLUSH



3G-2PLI-D-TW-L500-S80-FL

DELIVERED LUMENS: 500LM/FT (2000LM)
SYSTEM WATTS: 4.6W/FT (18.4W)
EFFICACY: 108LPW
CRI: 83+
CCT: 3500K
LENS OPTION: FLUSH


DD1 - 1" DROP LENS



3G-2PLI-D-TW-L500-S80-DD1

DELIVERED LUMENS: 500LM/FT (2000LM)
SYSTEM WATTS: 4.6W/FT (18.4W)
EFFICACY: 111LPW
CRI: 83+
CCT: 3500K
LENS OPTION: 1" DROP


DD2 - 2" DROP LENS



3G-2PLI-D-TW-L500-S80-DD2

DELIVERED LUMENS: 500LM/FT (2000LM)
SYSTEM WATTS: 4.6W/FT (18.4W)
EFFICACY: 112LPW
CRI: 83+
CCT: 3500K
LENS OPTION: 2" DROP

DASY - ASYMMETRIC OPTIC



3G-2PLI-D-TW-L500-S80-DASY

DELIVERED LUMENS: 500LM/FT (2000LM)
SYSTEM WATTS: 4.6W/FT (18.4W)
EFFICACY: 103PW
CRI: 83+
CCT: 3500K
LENS OPTION: ASYMMETRIC

Copyright 2019 3G Lighting | **www.3glighting.com** | **P:** 905-850-2305 **TF:** 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.

5 YEAR LIMITED WARRANTY

3G-2PLI-D

2" LINEAR PENDANT, DIRECT
TUNABLE WHITE & RGBW


PERFORMANCE CHART BASED ON 4' LENGTH (RGBW WITH 83+ CRI AND 3500K SOURCE)

COLOR TEMP	DELIVERED LUMENS (LM/FT)	SYSTEM WATTS (W/FT)	EFFICACY (LPW)
3500K	250	2.1	119
	500	4.3	117
	750	7.0	107
	1000	10.3	98

LUMINOUS INTENSITY PER LED	RGB	INTENSITY Min - Max (mcd)
	RED	355 – 805
	GREEN	710 – 1400
	BLUE	140 – 355

PHOTOMETRY BASED ON 4' LENGTH (83+ CRI AND 3500K SOURCE)


FL - FLUSH



3G-2PLI-D-RGBW-L500-S80-FL

DELIVERED LUMENS: 500LM/FT (2000LM)
SYSTEM WATTS: 4.3W/FT (17.2W)
EFFICACY: 117LPW
CRI: 83+
CCT: 3500K
LENS OPTION: FLUSH


DD1 - 1" DROP LENS



3G-2PLI-D-RGBW-L500-S80-DD1

DELIVERED LUMENS: 500LM/FT (2000LM)
SYSTEM WATTS: 4.3W/FT (17.2W)
EFFICACY: 121LPW
CRI: 83+
CCT: 3500K
LENS OPTION: 1" DROP

DD2 - 2" DROP LENS



3G-2PLI-D-RGBW-L500-S80-DD2

DELIVERED LUMENS: 500LM/FT (2000LM)
SYSTEM WATTS: 4.3W/FT (17.2W)
EFFICACY: 124LPW
CRI: 83+
CCT: 3500K
LENS OPTION: 2" DROP

Copyright 2019 3G Lighting | **www.3glighting.com** | **P:** 905-850-2305 **TF:** 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.

5 YEAR LIMITED WARRANTY

3G-2PLI-D

2″ LINEAR PENDANT, DIRECT
TUNABLE WHITE & RGBW

TECHNICAL

HOUSING

Extruded aluminum housing with narrow 2″ aperture
Machined aluminum end caps add 1/4″ to each end of luminaire
Individual units and continuous runs available in 1’ increments
24-gauge LED reflector with high reflectance white powder coated finish
Standard polyester powder coated matte white finish.
Optional finishes available

OPTICS

Extruded, satin acrylic lens designed for optimal performance and glare control. Up to 8′ continuous
Lens options include flush, 1″ and 2″ drops with illuminated end caps for all drop lenses
High performance asymmetric optics available

ELECTRICAL

Luminaires are pre-wired with factory installed quick connects and branch circuit wiring
Multiple driver options available for tunable white LED system
DMX driver option for RGBW system with RDM control and 100-0% dimming range
All drivers are integral and easily accessible through luminaire aperture

LED SYSTEM FOR TUNABLE WHITE (TW)

Proprietary LED system with color consistency <3 SDCM
2700K-6500K CCT range
Standard 83+CRI. Optional 93+CRI. (R9 value of 56 for 93+CRI)
L90 >60,000 hours
5 Year Warranty

LED SYSTEM FOR RGBW

Proprietary LED system with color consistency <3 SDCM
White LED available in 35K with 83+ CRI
L80 >72,000 hours
Red (335-805 mcd)
Green (710-1400 mcd)
Blue (140-355 mcd)
5 Year Warranty

MOUNTING

Toolless installation with 3G’s proprietary mounting system
Internal, toolless joiner system (latch and hook) easily connects multiple sections together
LED reflectors remain within each fixture section during installation with 3G’s click and lock spring system
Adjustable aircraft cable suspension with locking fasteners (60” length standard)
White cable and white mounting canopies provided as standard
Suitable for various architectural ceilings (see mounting details)
Fixture weight: +/- 2.5 lb/ft

LISTING

ETL listed and tested to cUL standards. Suitable for dry and damp locations

WARRANTY

5 Year Warranty on LED and drivers
Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C


Copyright 2019 3G Lighting | www.3glighting.com | P: 905-850-2305 **TF:** 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.

5 YEAR LIMITED WARRANTY

3G-2PLI-D


2″ LINEAR PENDANT, DIRECT
TUNABLE WHITE & RGBW

DRAWINGS AND DIMENSIONS

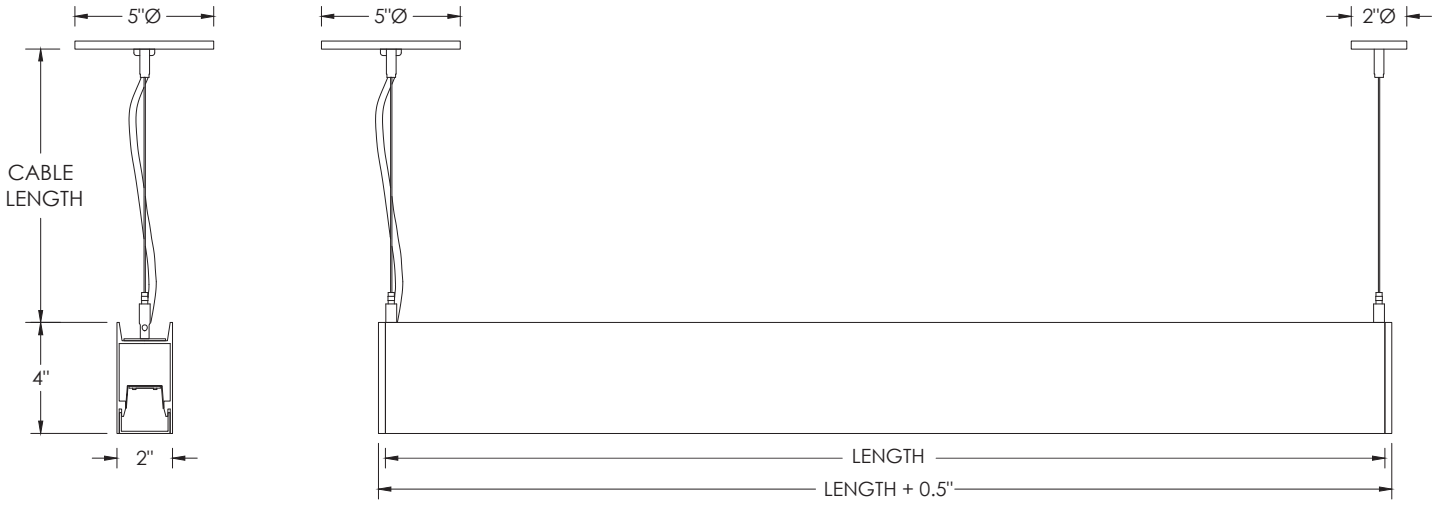


LENS OPTION






FL - FLUSH **DD1 -** 1″ DROP **DD2 -** 2″ DROP **DASY -** ASYMMETRIC

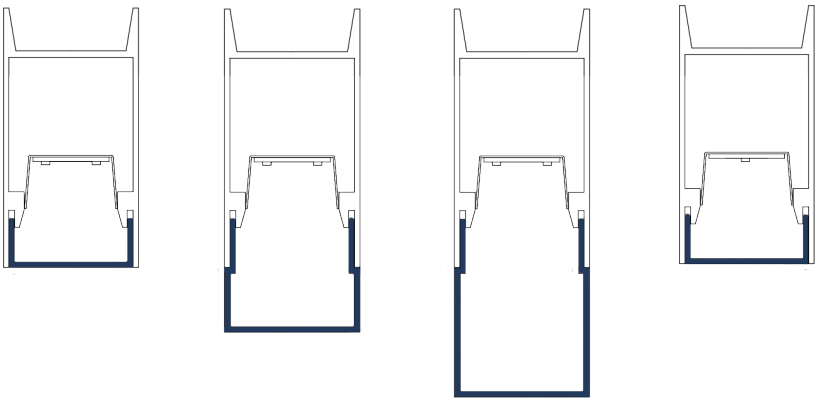

PATTERNS

Specify pattern shape and overall dimensions as shown below. Available in 1′ increments only
Patterns are connected with fully illuminated 12″x12″ L, T, and X-shaped sections



L-SHAPE	U-SHAPE	RECTANGLE/SQUARE	T-SHAPE	X-SHAPE
Provide dimensions of AxB Example: **L** - 6’x8’	Provide dimensions of AxBxC Example: **U** - 8’x10’x6’	Provide dimensions of AxB Example: **R** - 10’x8’	Provide dimensions of AxB Example: **T** - 14’x6’	Provide dimensions of AxB Example: **X** - 14’x14’
				


Copyright 2019 3G Lighting | **www.3glighting.com** | **P:** 905-850-2305 **TF:** 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.

5 YEAR LIMITED WARRANTY

3G-2PLI-D


2" LINEAR PENDANT, DIRECT
TUNABLE WHITE & RGBW

TYPICAL SECTION MOUNTING (AVAILABLE IN 1' INCREMENTS AS STANDARD)

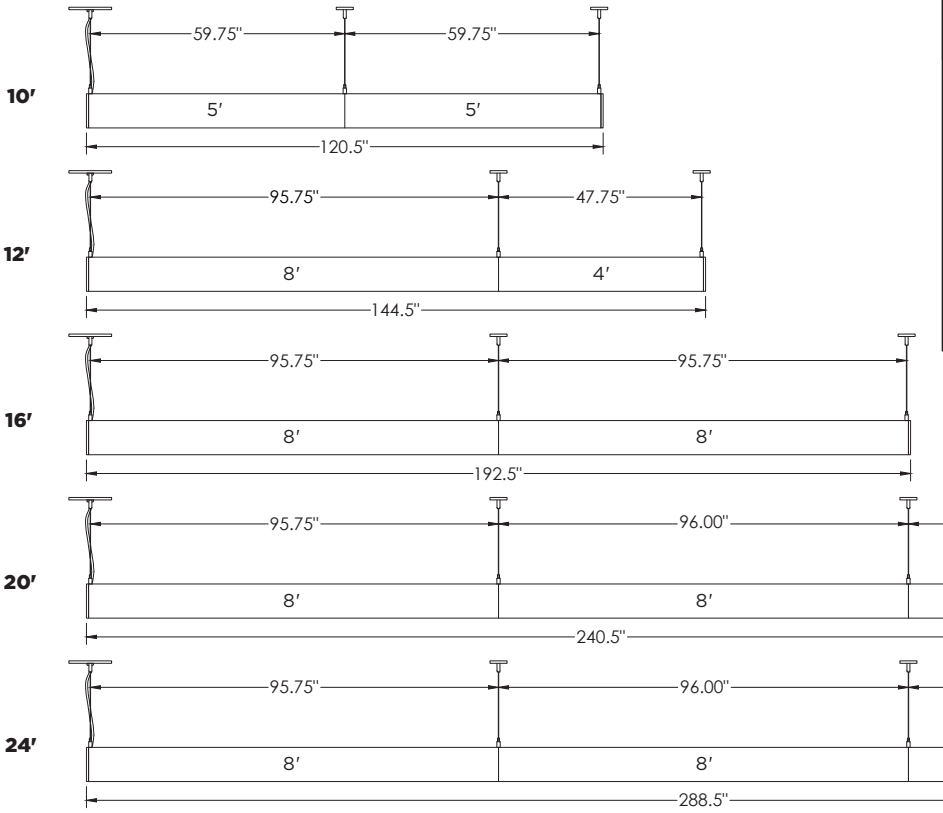


TOOLLESS INSTALLATION

WITH 3G'S PROPRIETARY JOINER SYSTEM

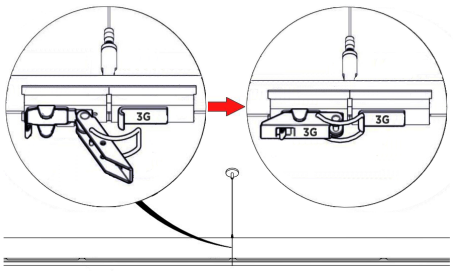


MOUNTING DETAILS

GRID POWER FEED	GRID NON POWER FEED
4" SLOTTED JUNCTION BOX (BY OTHERS)	

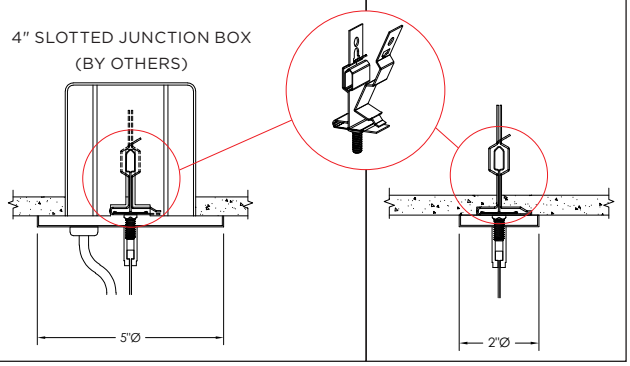

DRYWALL POWER FEED	DRYWALL NON POWER FEED
OCTAGON JUNCTION BOX (BY OTHERS)	

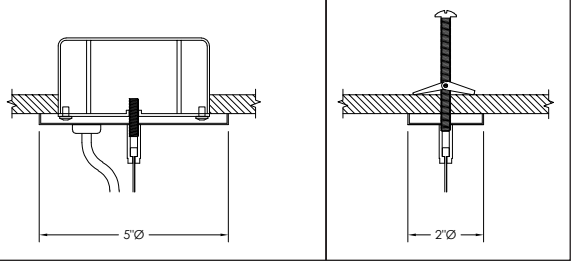

Copyright 2019 3G Lighting | **www.3glighting.com** | **P:** 905-850-2305 **TF:** 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.

5 YEAR LIMITED WARRANTY

Declare® is a product transparency program administered by the International Living Future Institute (ILFI), providing standardized disclosure of product ingredients, manufacturing location, service life, end-of-life pathways, and Living Building Challenge compliance status.

PRODUCT FAMILY COVERAGE — LINEAR SYSTEMS

Linear luminaires for suspended, surface, and recessed applications, including perimeter conditions, wall grazing, acoustic lighting, acoustic integration, low-glare multicell runs, and linear systems with integrated downlight modules. Available with flush and drop lens options, multiple distributions including batwing and asymmetric, and a range of lengths and output levels.

LBC RED LIST FREE

This product family carries a Declare® designation of LBC Red List Free, the highest designation within the Declare program. Products with this designation contain no intentionally added Red List chemicals above applicable Declare reporting thresholds and have been evaluated against the Living Building Challenge Red List.

BUILDING CERTIFICATION PROGRAMS

Material transparency documentation is increasingly requested as part of building certification programs and owner standards. Declare labels may be used as supporting documentation for project teams pursuing:

- Living Building Challenge (LBC)
- WELL Building Standard™ v1
- WELL Building Standard™ v2
- LEED®
- Other material disclosure and material health initiatives

Project certification requirements are determined at the building level and should be evaluated by the project team.

Declare℠

Linear Systems
3G Lighting

Final Assembly: Woodbridge, Ontario, Canada
Life Expectancy: 7+ Year(s)
End of Life Options: Recyclable (95%), Landfill (5%)

Ingredients:

Aluminum UNS A96063; Steel, cold roll UNS G10080; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Copper UNS C11000; 2-Propenoic acid, butyl ester, polymer with ethenylbenzene and 2-propenenitrile; Carbonic dichloride, polymer with 4,4′-(1-methylethylidene)bis[phenol]; Polyethylene Terephthalate; Pulp, cellulose; Aluminum diethylphosphinate; Benzene, ethenyl-, polymer with 1,3-butadiene, hydrogenated; Distillates (petroleum), hydrotreated heavy naphthenic; Polypropylene; Paper; Tin, Organic; Starch, base-hydrolyzed, borated; 2,4,8,10-Tetraoxa-3,9-diphosphaspiro[5.5]undecane, 3,9-bis[2,4-bis(1,1-dimethylethyl)phenoxy]-; Vinyl acetate; Phosphorus; Iron; Zinc; 1,3-Propanediol, 2-ethyl-2-(hydroxymethyl)-

Living Building Challenge Criteria: Compliant

I-13 Red List:
■ LBC Red List Free
☐ LBC Red List Approved
☐ Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

XXX-XXXX
EXP. 01 JUN 2027
Original Issue Date: 2026

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare