






3G-RC1, 3G-RC2, 3G-RC3, 3G-RC4, 3G-RC4SQ
3G-RC1M5, 3G-RC2M5, 3G-RC3M5
1 LIGHT, 2 LIGHT, 3 LIGHT, 4 LIGHT RECESSED MADISON
TRIM




i THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


INCLUDED COMPONENTS	
NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)	
 LED INSERT (RC1 SHOWN) NEW CONSTRUCTION HOUSING (RC1 SHOWN) BAR HANGERS (OPTIONAL)	

INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
 ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
 POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING


1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

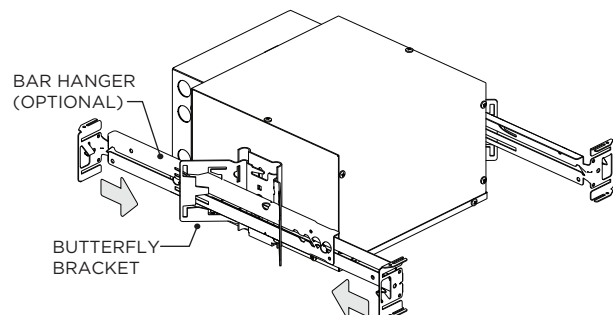


1A

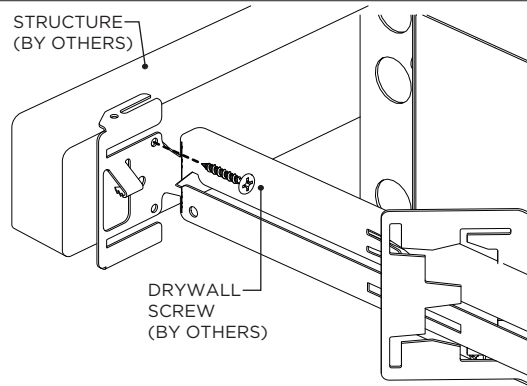


2 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

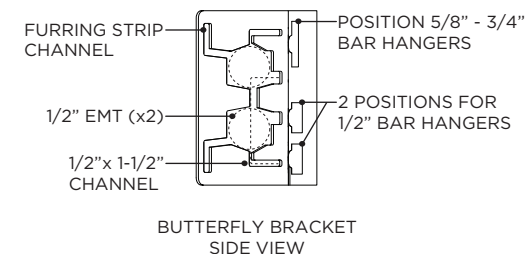


3

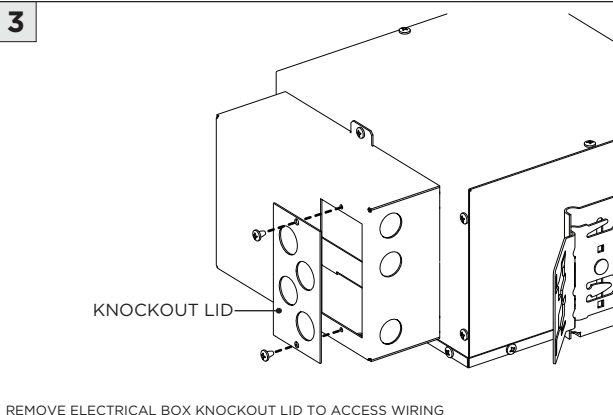

3A

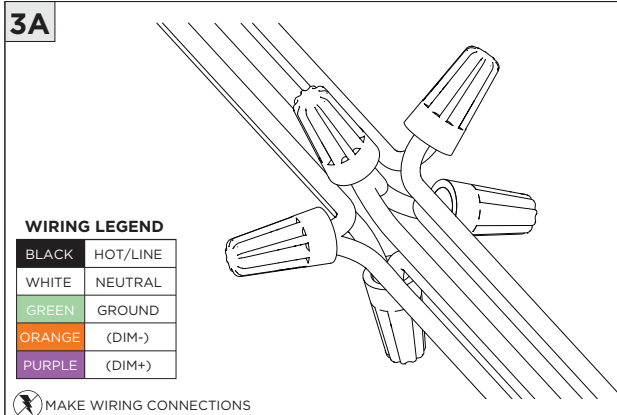


4 CEILING CUTOUT DIMENSIONS

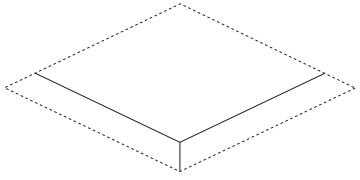


FIXTURE TYPE	CEILING HOLE SIZE	FIXTURE TYPE	CEILING HOLE SIZE
RC1	6.05" x 6.05"	RC1M5	5.05" x 5.05"
RC2	13.60" x 6.05"	RC2M5	11.63" x 5.05"
RC3	19.10" x 6.05"	RC3M5	16.38" x 5.05"
RC4	24.60" x 6.05"		
RC4SQ	10.84" x 10.84"		

INSTALL CEILING BELOW FIXTURE


5

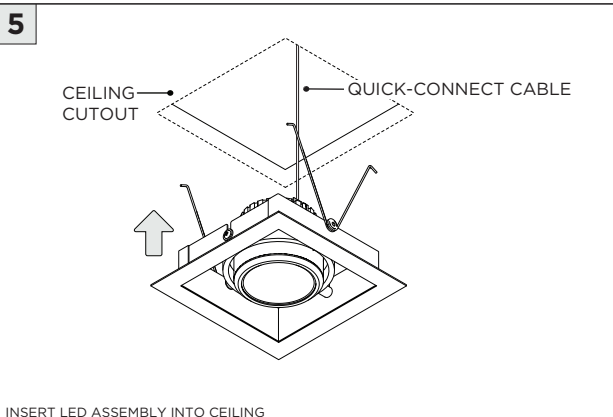

5A

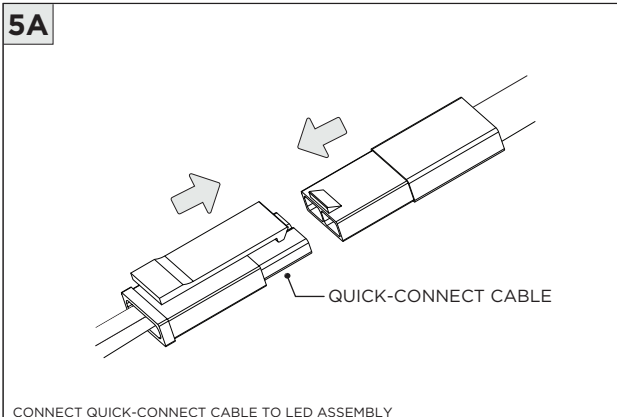


5B

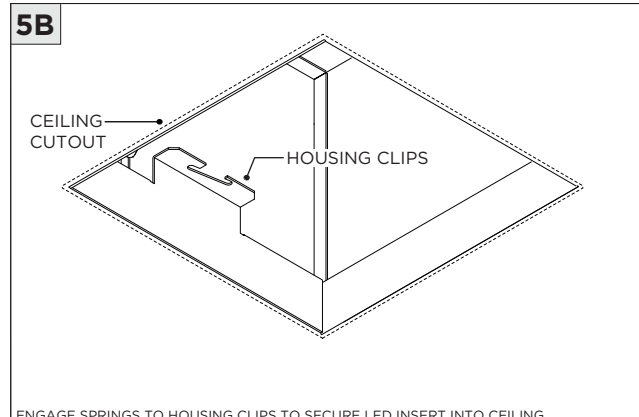


DRIVER SERVICING - RC1

1 NC/IC - NEW CONSTRUCTION HOUSING

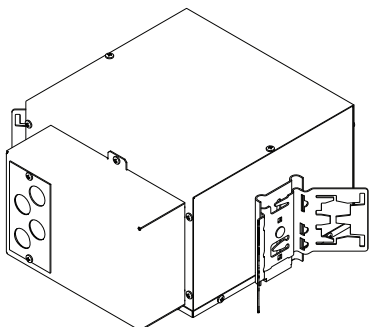


DISCONNECT POWER BEFORE SERVICING

2

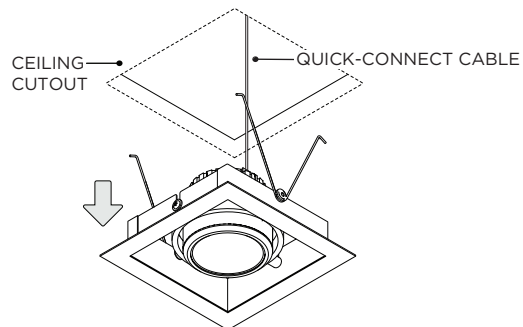


REMOVE LED ASSEMBLY FROM CEILING

2A

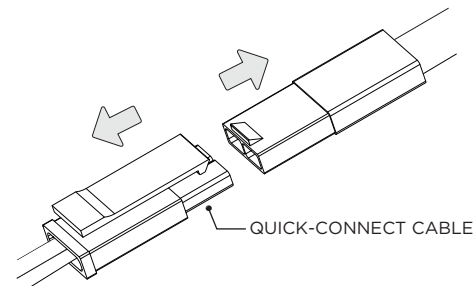


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

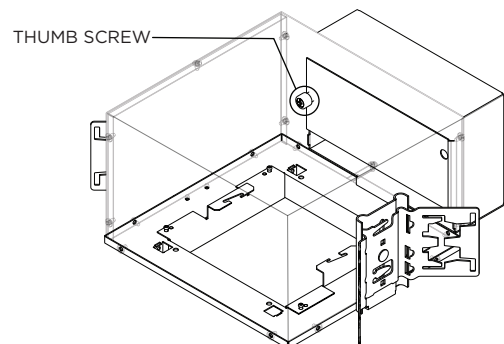


4

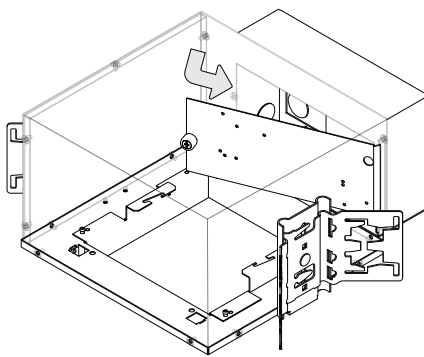

5

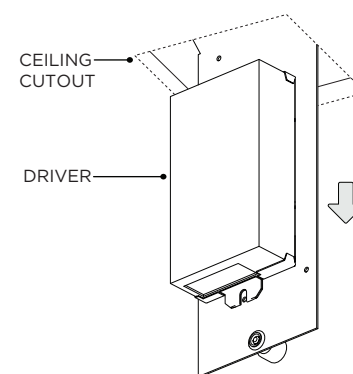


5A

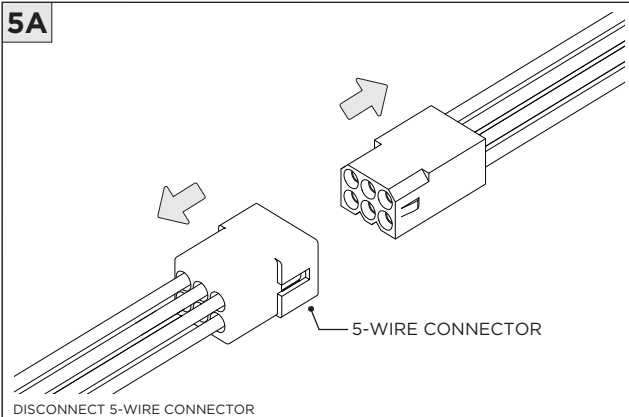

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING - RC1, RC2, RC3, RC4, RC4SQ

1 NC/IC - NEW CONSTRUCTION HOUSING

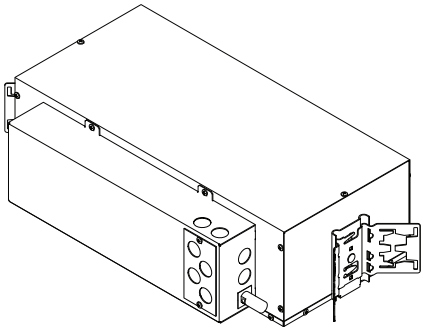


DISCONNECT POWER BEFORE SERVICING

2

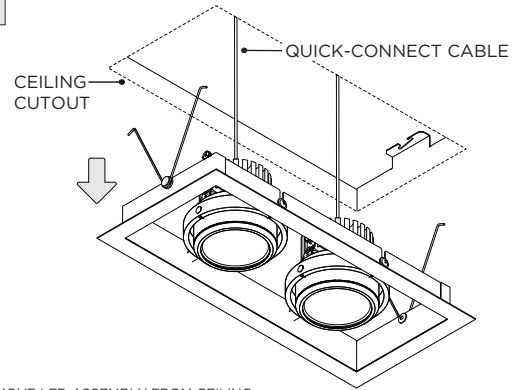


REMOVE LED ASSEMBLY FROM CEILING

2A

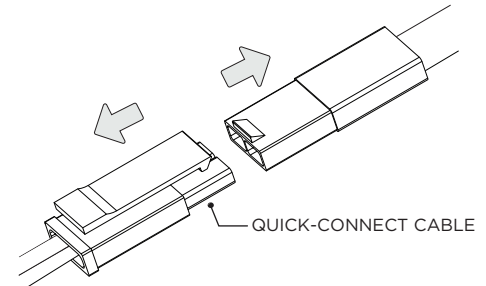


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

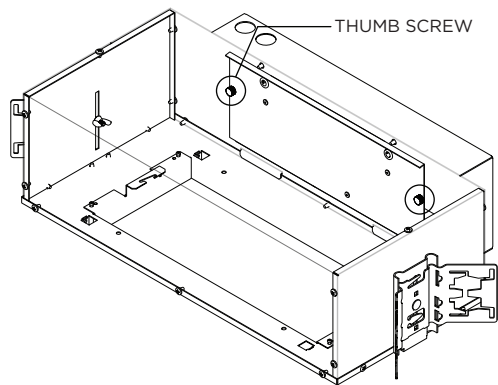


4

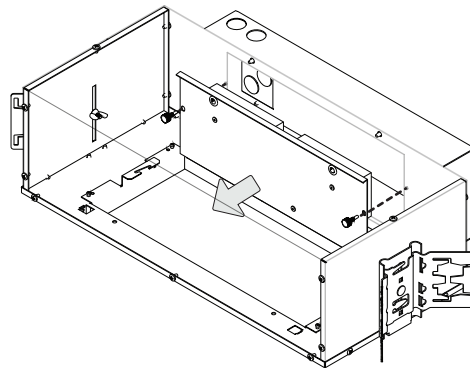

5

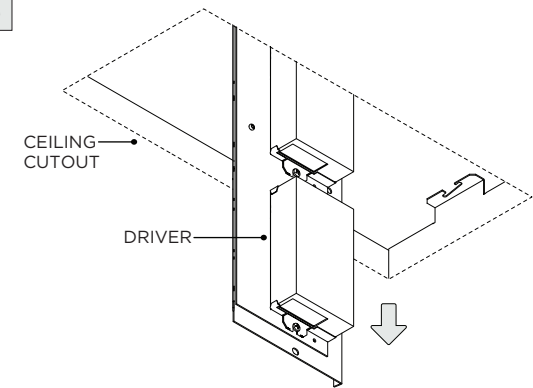


5A

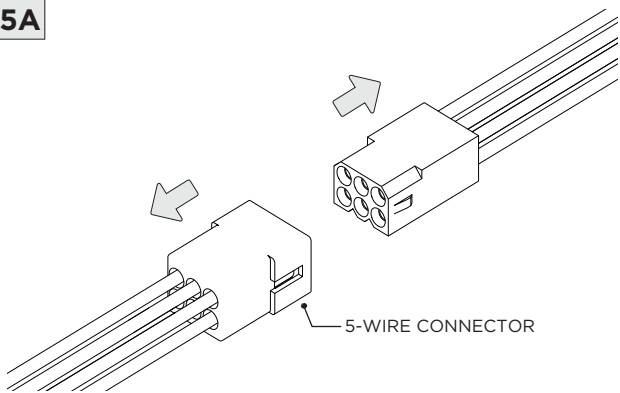

DISCONNECT 5-WIRE CONNECTORS


LED SERVICING

1

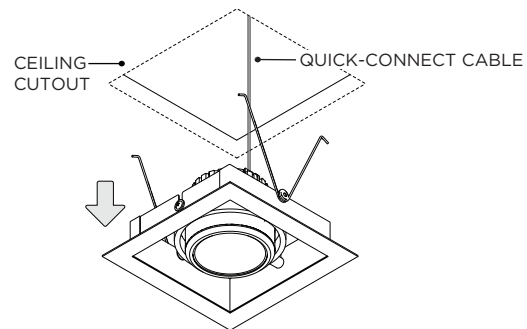


REMOVE LED ASSEMBLY FROM CEILING

2

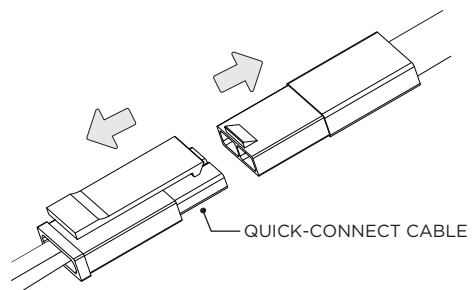


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

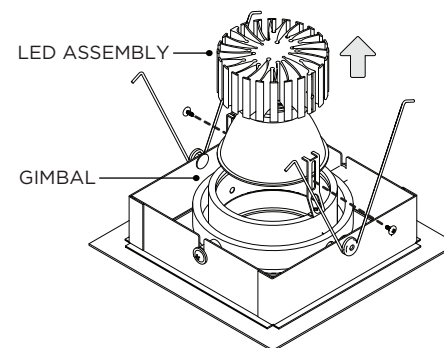

4

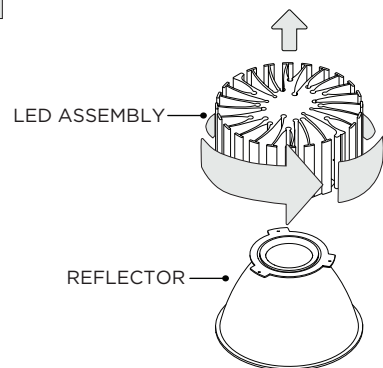


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR
SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

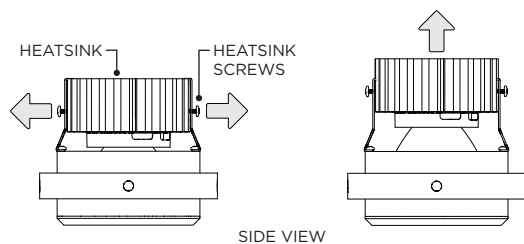


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR
OPTICAL ACCESSORY CLEARANCE

2

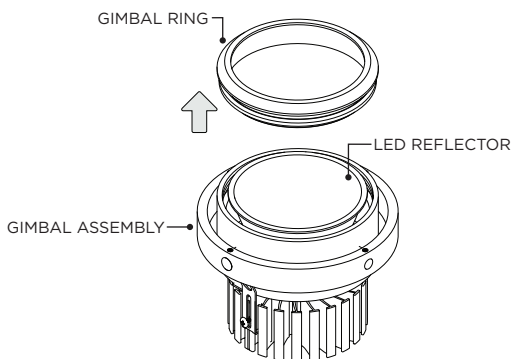


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

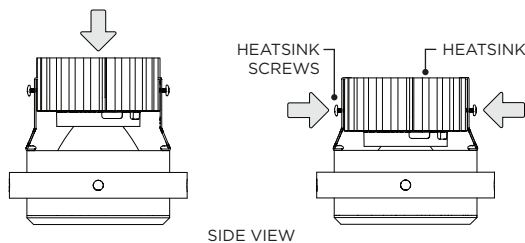

SIDE VIEW

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS