















3G-RC1, 3G-RC2, 3G-RC3, 3G-RC4, 3G-RC4SQ
3G-RC1M5, 3G-RC2M5, 3G-RC3M5
1 LIGHT, 2 LIGHT, 3 LIGHT, 4 LIGHT RECESSED MADISON
TRIMLESS








i THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)	
 LED INSERT (RC1 SHOWN) NEW CONSTRUCTION HOUSING (RC1 SHOWN) BAR HANGERS (OPTIONAL)	


INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
 ATTENTION	
 POWER ON	
 POWER OFF	

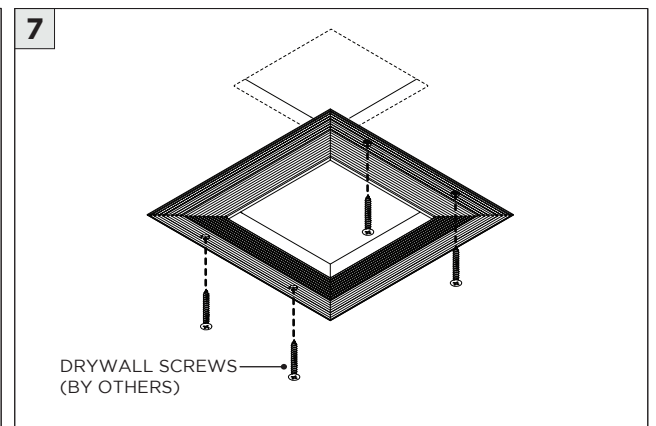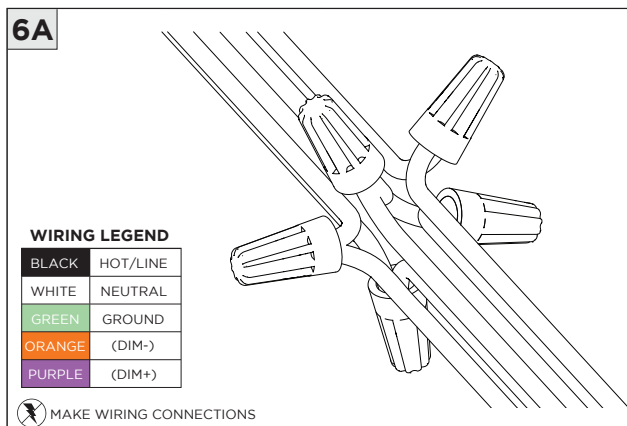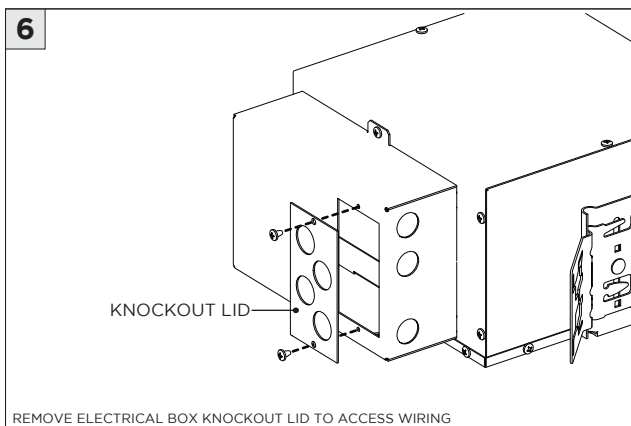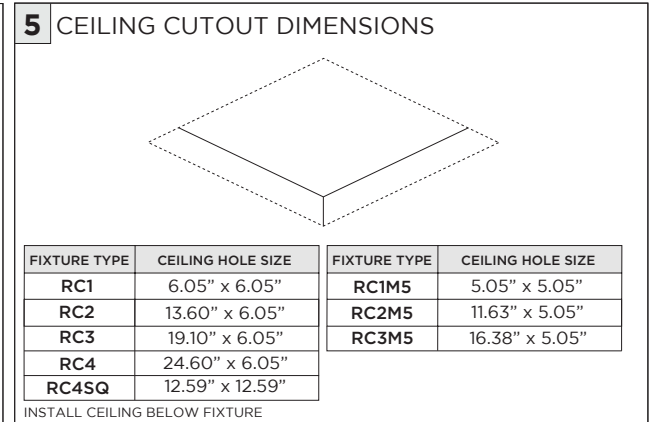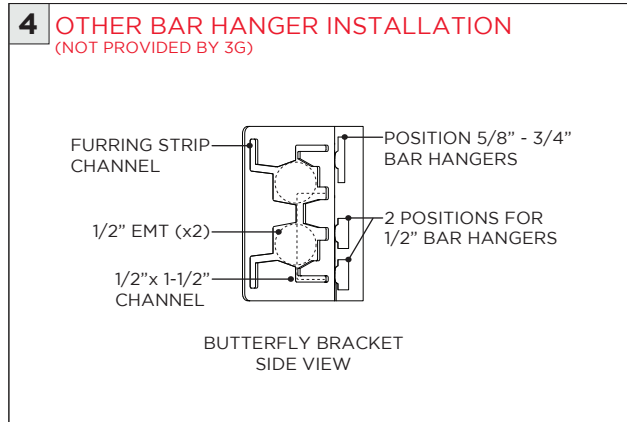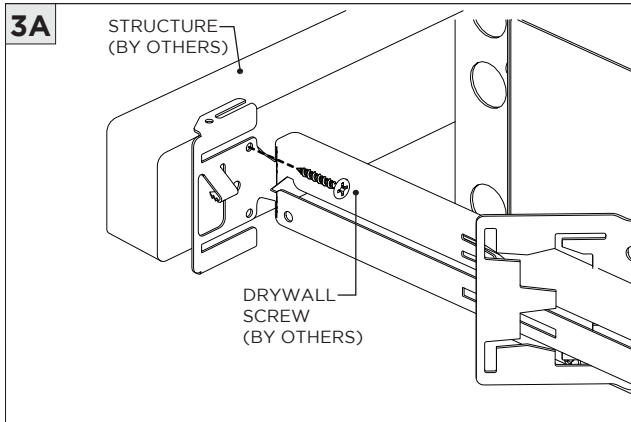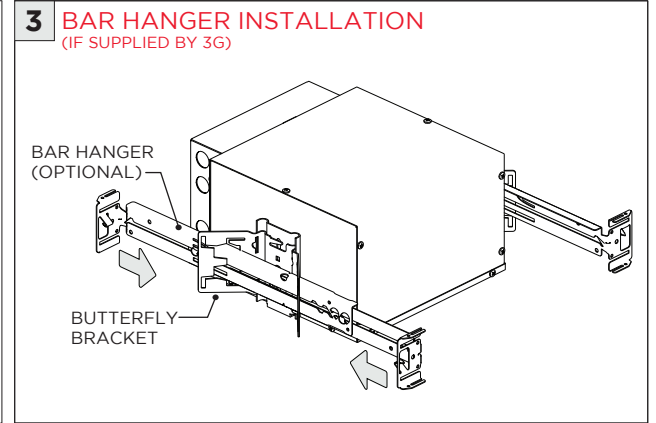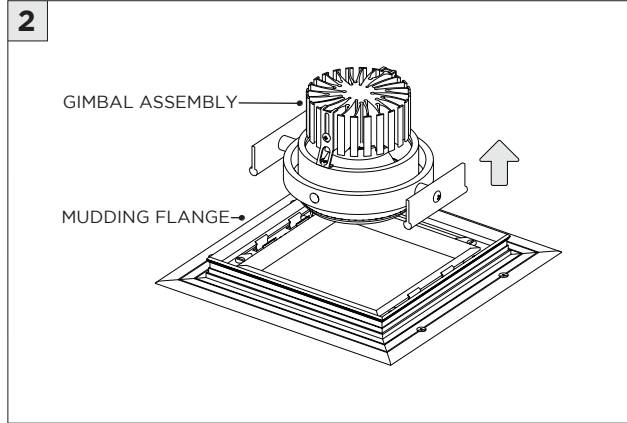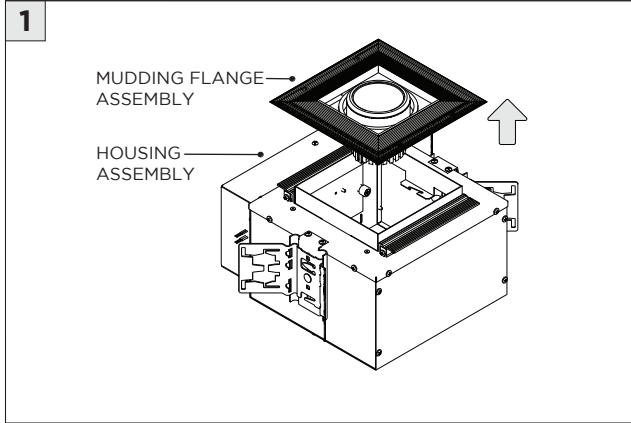

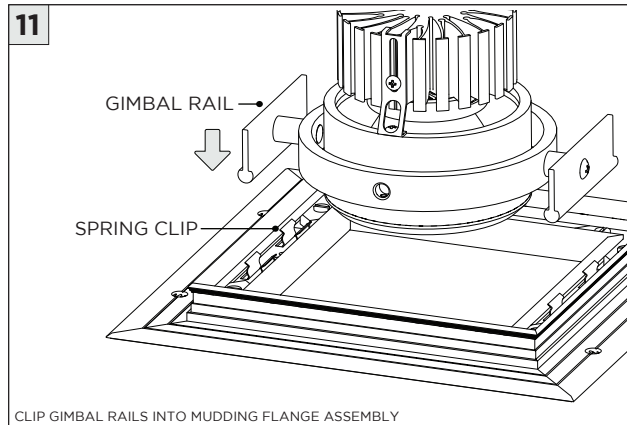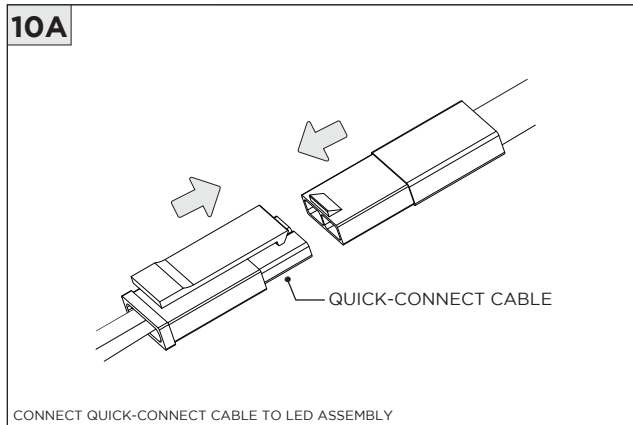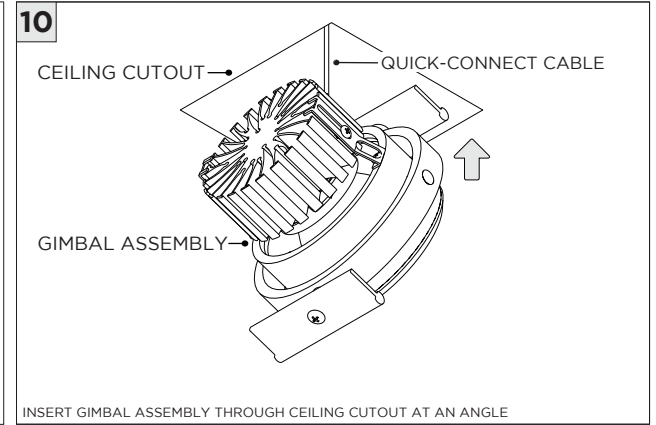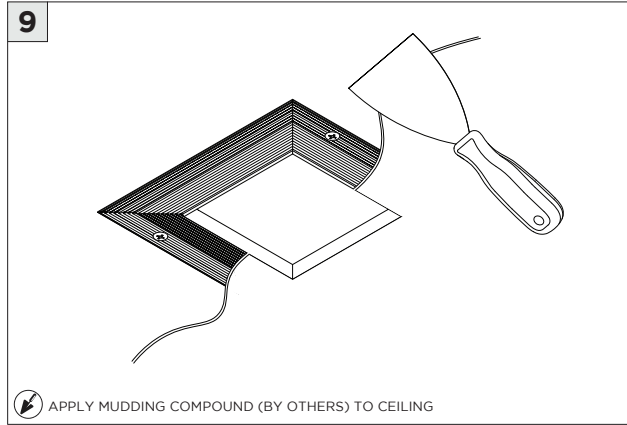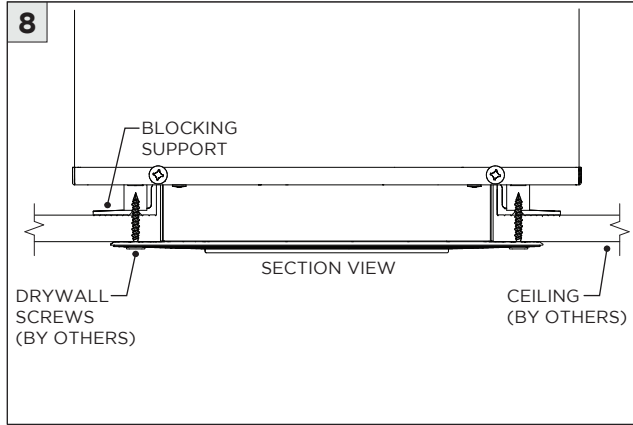


DRIVER SERVICING

1 NC/IC - NEW CONSTRUCTION HOUSING

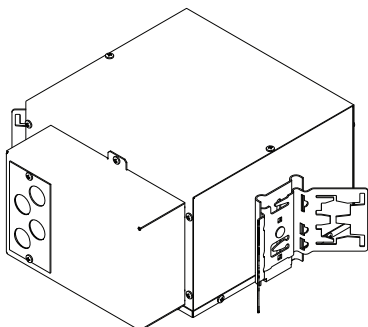


DISCONNECT POWER BEFORE SERVICING

2

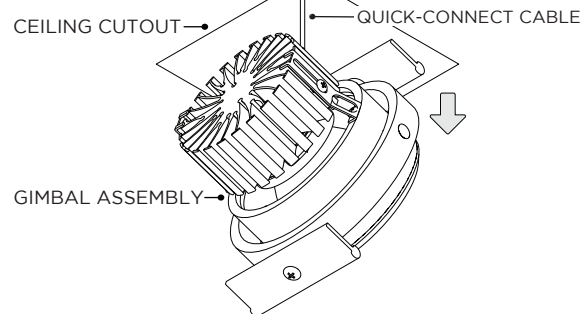

PUSH UP TO RELEASE GIMBAL ASSEMBLY FROM HOUSING
REMOVE GIMBAL ASSEMBLY FROM CEILING


2A

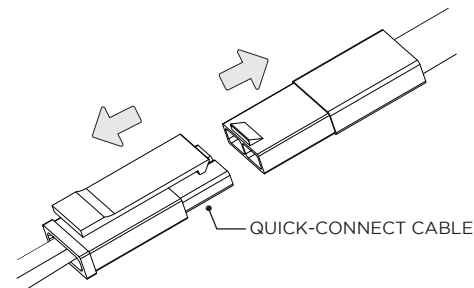


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

THUMB SCREW

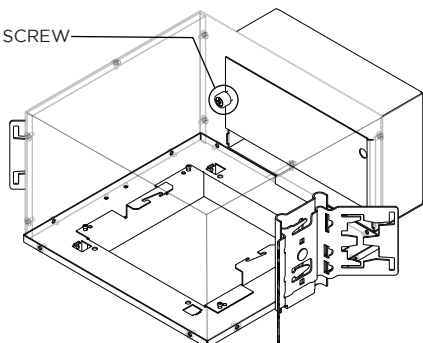


4

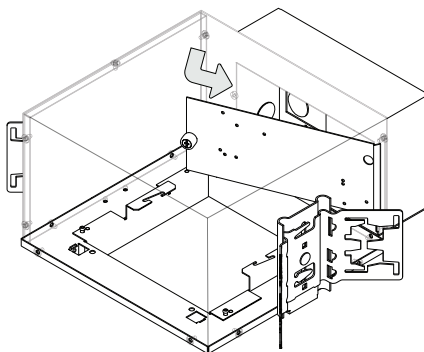

5

CEILING
CUTOUT

DRIVER

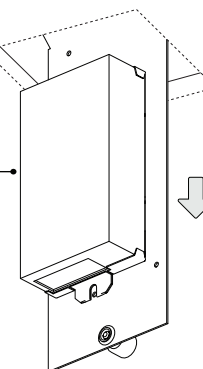

5A




5-WIRE CONNECTOR

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING - RC1, RC2, RC3, RC4, RC4SQ

1 NC/IC - NEW CONSTRUCTION HOUSING

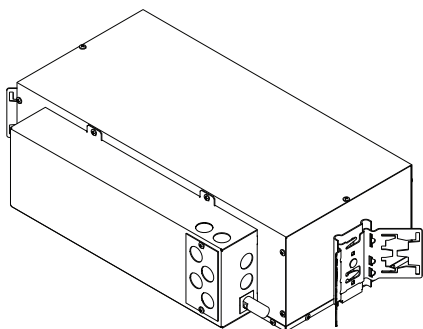


DISCONNECT POWER BEFORE SERVICING

2

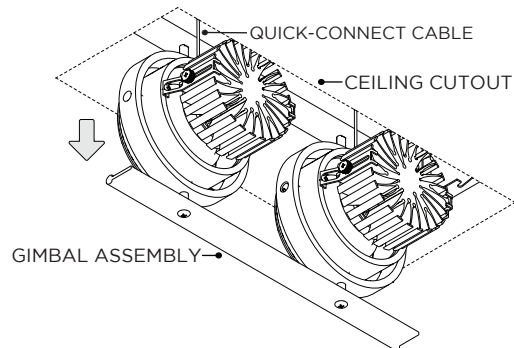


PUSH UP TO RELEASE GIMBAL ASSEMBLY FROM HOUSING
REMOVE GIMBAL ASSEMBLY FROM CEILING

2A

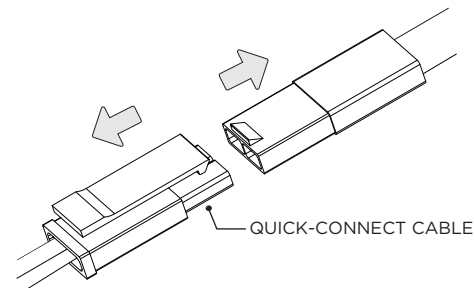


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

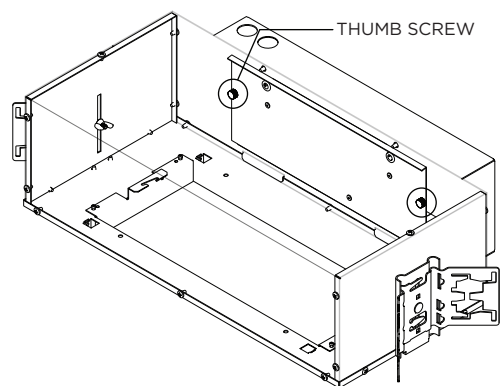


4

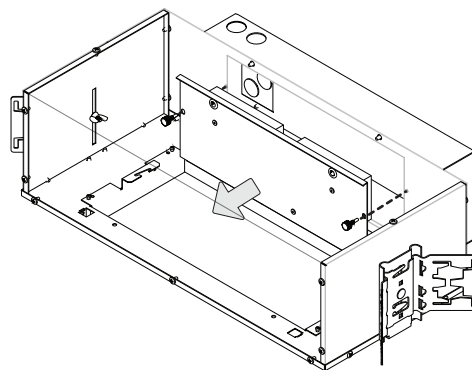

5




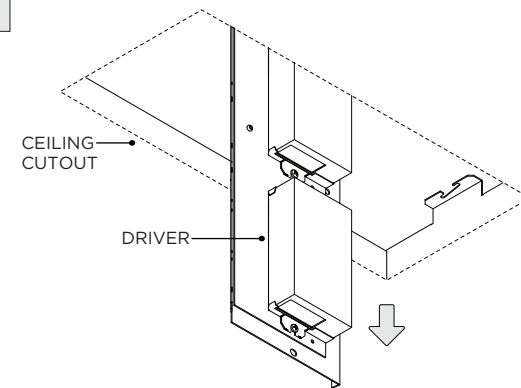


5A

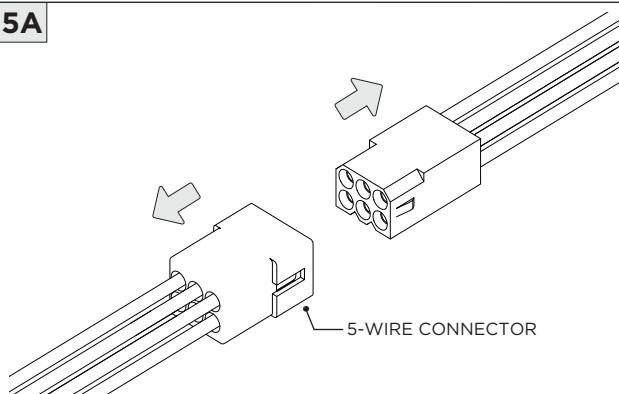

DISCONNECT 5-WIRE CONNECTORS

LED SERVICING

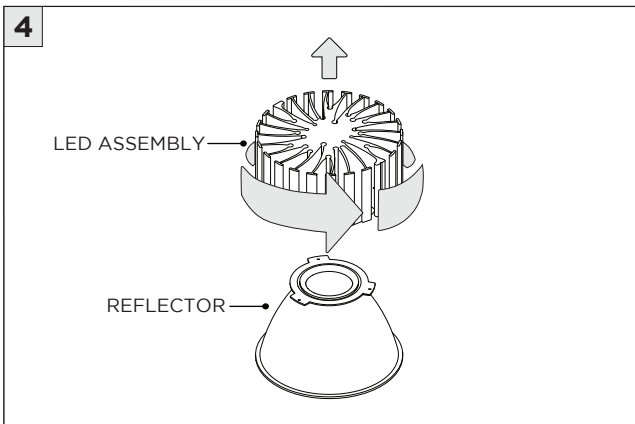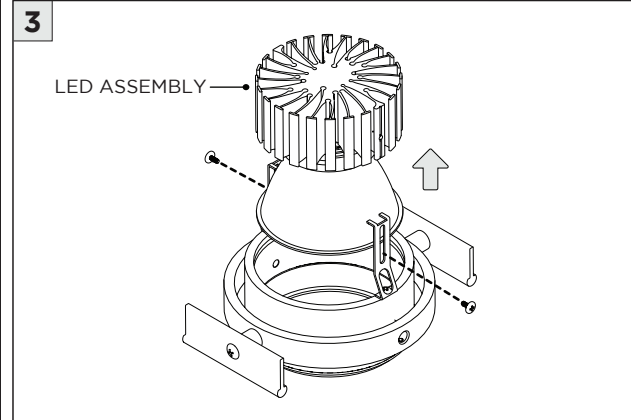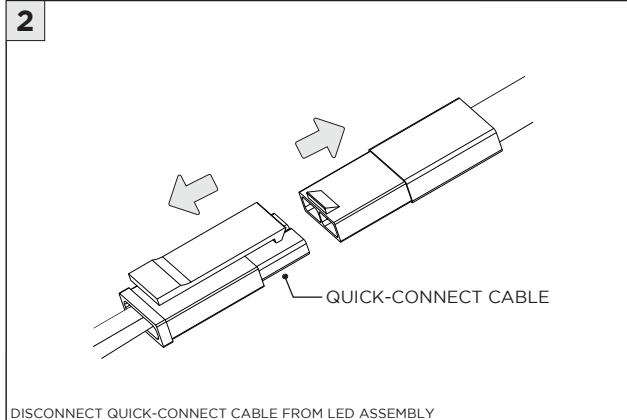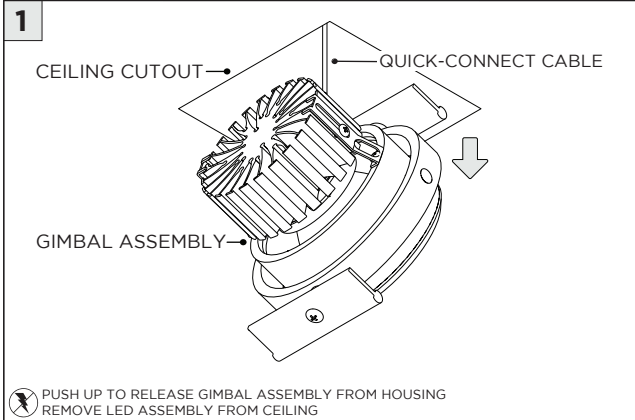


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR
SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

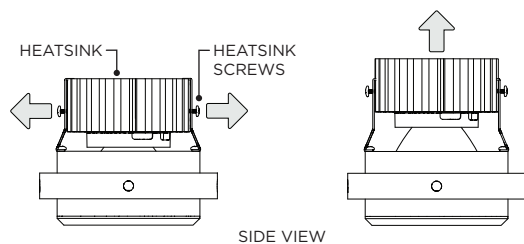


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR
OPTICAL ACCESSORY CLEARANCE

2

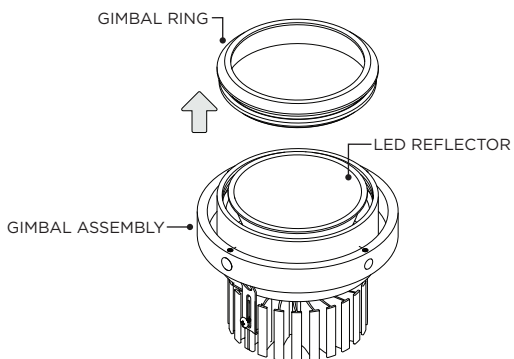


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

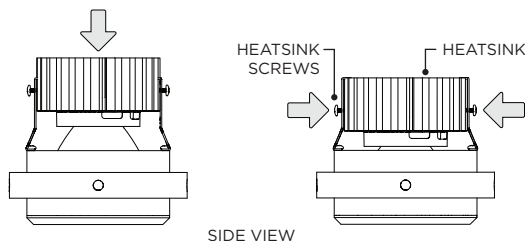

SIDE VIEW

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS