
3G-PKU1222

12" MULTIPLE SQUARE
PENDANT KUBO

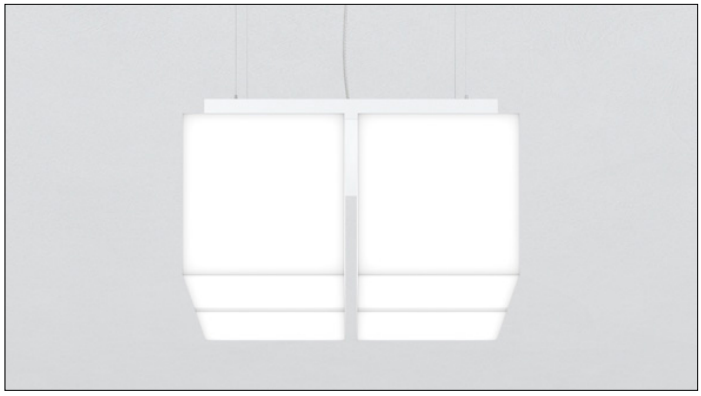

Featuring a white sandblasted acrylic diffuser with mitered corners
Proprietary LED source fully saturates the hand fabricated acrylic
Evenly illuminated sides with distinctive lines
Standard and high lumen output options
Adjustable aircraft cable suspension
1% dimming standard with several driver options

PROJECT:		**TYPE:**			
CATALOG#:		**DATE:**		**QTY:**	

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	VOLTAGE
3G-PKU1222	**25 -** 2500 LUMENS **35 -** 3500 LUMENS **45 -** 4500 LUMENS	**H90 -** 90+ CRI	**27K -** 2700K **30K -** 3000K **35K -** 3500K **40K -** 4000K	**UNV -** 120/277V **347 -** 347V [1]

DRIVER	FINISH	CABLE LENGTH	OPTIONS
DIM - 0-10V (100-1%) **D01 -** 0-10V (100-0.1%) **DALI -** DALI (100-1%) [2] **DHL2 -** LUTRON HI-LUME (1% ECOSYSTEM)	**WH -** WHITE (STANDARD) **BK -** BLACK **SV -** SILVER	**60" -** 60" (STANDARD) **120" -** 120"	**EMC -** EMERGENCY CIRCUIT

1 347 available in "DIM" 0-10V only (100-1%)

2 DALI-2 (Type 6) provided as standard

PERFORMANCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
2500	2500	28	91
3500	3500	39	89
4500	4500	50	89

BASED ON 90+ CRI, 3500K
Lumen output and actual wattage may vary +/- 5%

LUMEN OUTPUT MULTIPLIERS

90+ CRI COLOR TEMP	
2700K	0.84
3000K	0.88
3500K	1.00
4000K	1.02

HOUSING

White sandblasted acrylic diffuser with mitered corners
Fixture collar made from cold rolled steel with powder coated finish
24 gauge LED reflector with high reflectance white powder coated finish
Standard polyester powder coated matte white finish. Optional finishes available

LISTING

ETL listed and conforms to UL1598 standard
Certified to CSA22.2 NO.250.0.
Rated for indoor dry or damp locations

WARRANTY

5 Year Warranty on LED and drivers
Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

ELECTRICAL


Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage drivers. Optional 347V, 0-10V drivers
Lutron EcoSystem and eldoLED DALI options available with 100-1% dimming range
All drivers are integral and easily accessible through luminaire aperture


LED SYSTEM

Proprietary LED system with color consistency <3 SDCM
Available in 27K, 30K, 35K, and 40K
Standard 90+CRI
L90 >60,000 hours
5 Year Warranty

MOUNTING


Adjustable aircraft cable suspension with locking fasteners (60" length standard)
White cable and white mounting canopies provided as standard
Suitable for various architectural ceilings (see mounting details)

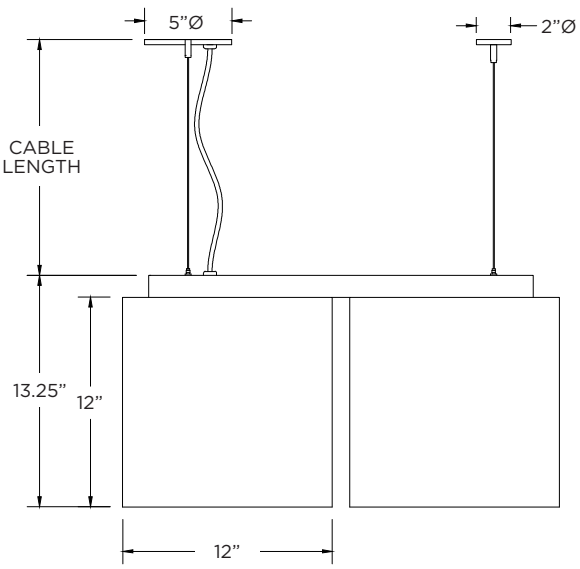

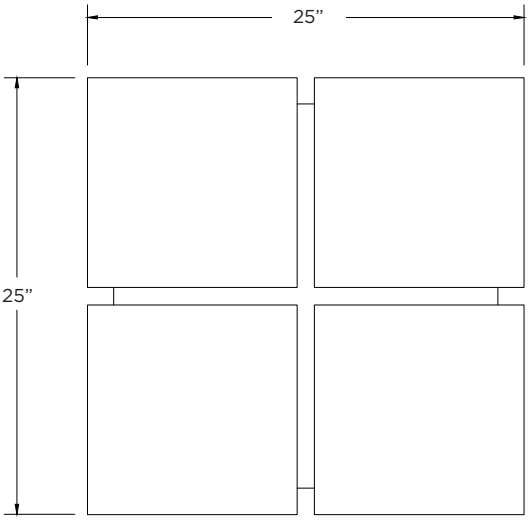


MOUNTING

GRID POWER FEED




Slotted junction box by others

GRID NON POWER FEED



DRYWALL POWER FEED



Octagonal junction box by others

DRYWALL NON POWER FEED

