



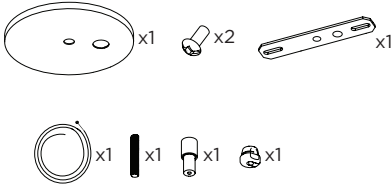





3G-PIN2, 3G-PIN3, 3G-PIN4, 3G-PIN4SQ
2 LIGHT, 3 LIGHT, 4 LIGHT MADISON INFORMA PENDANT





THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

HOUSING		INCLUDED COMPONENTS	
3G-PIN2  3G-PIN3 		POWER FEED KIT 	NON-POWER FEED KIT 
3G-PIN4  3G-PIN4SQ 			



INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
 ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
 POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

SUSPENSION MOUNTING

3G-PIN2

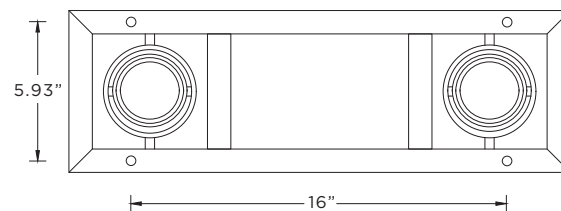
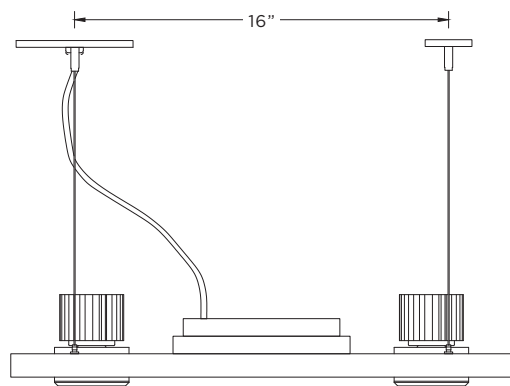


3G-PIN3

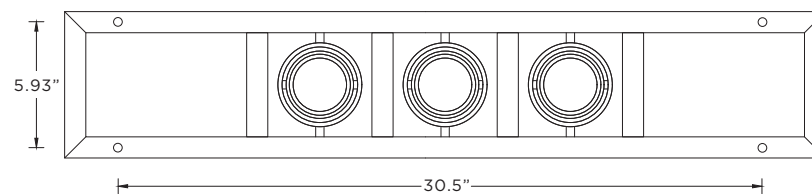
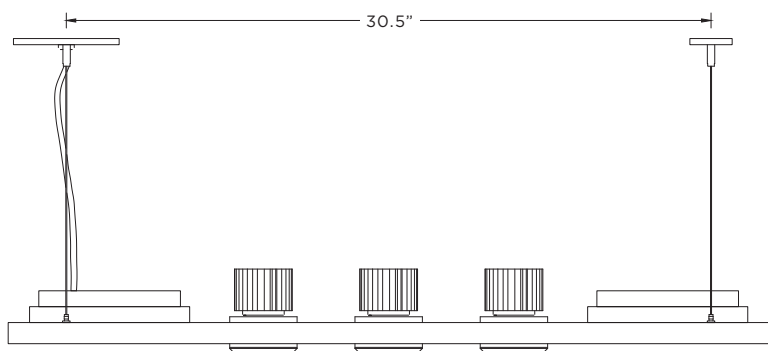









SUSPENSION MOUNTING

3G-PIN4

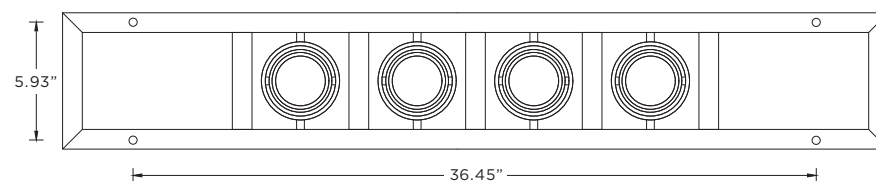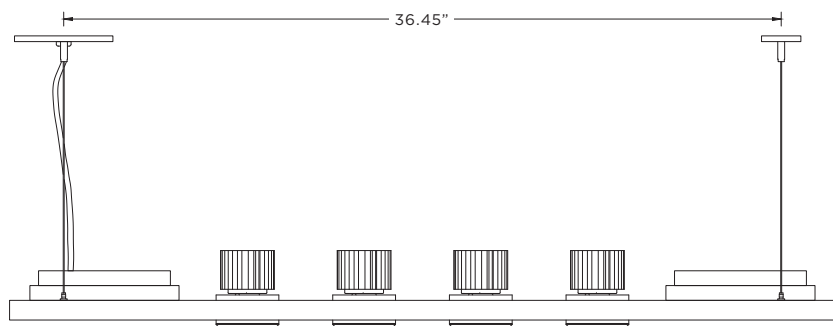


3G-PINSQ


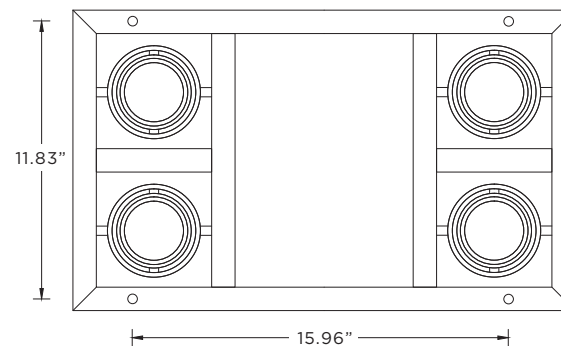
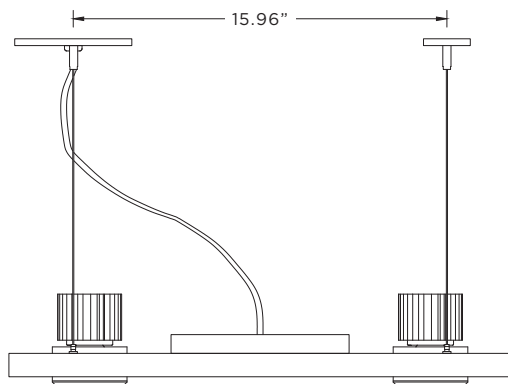


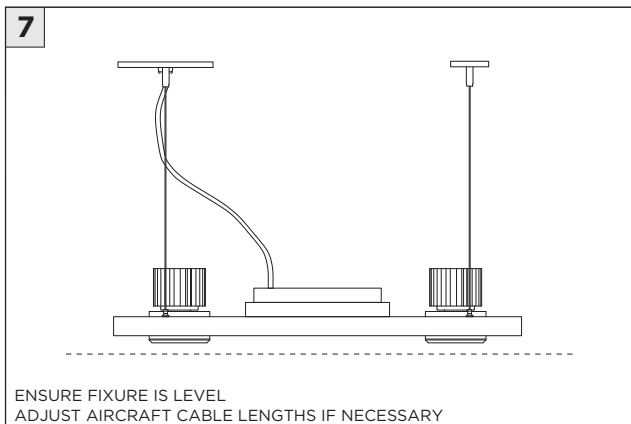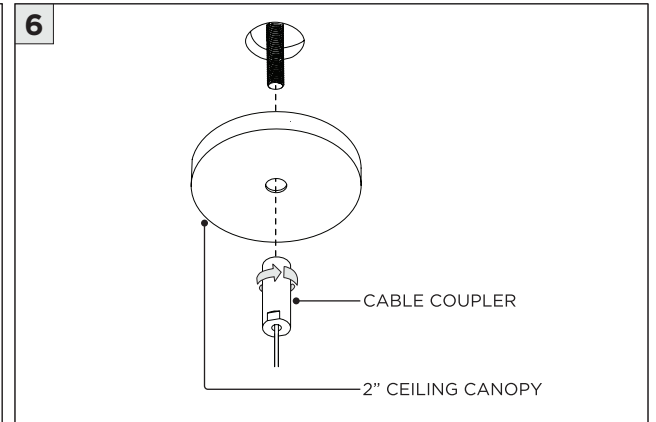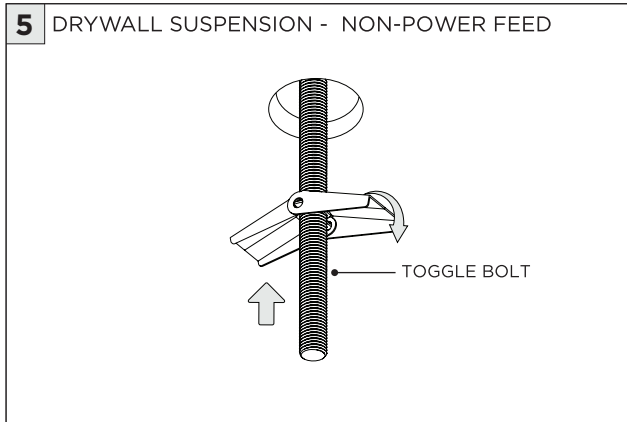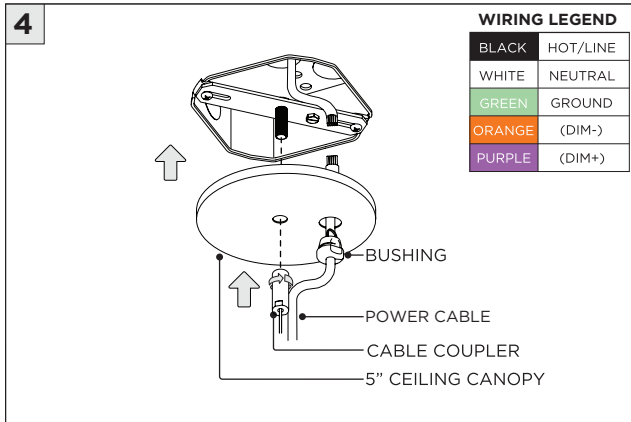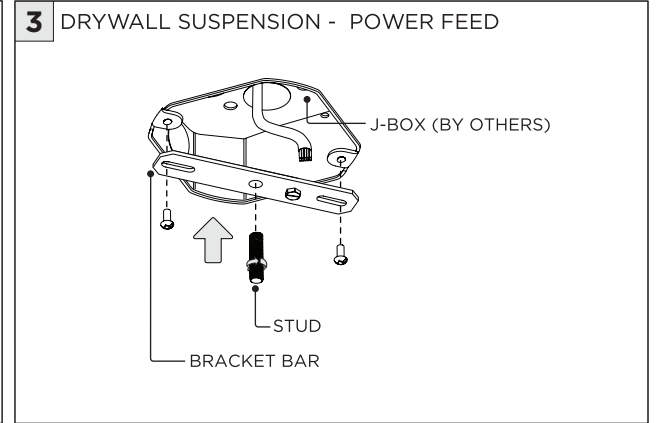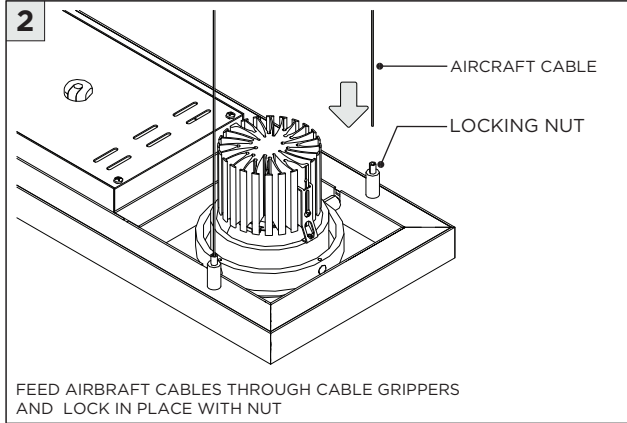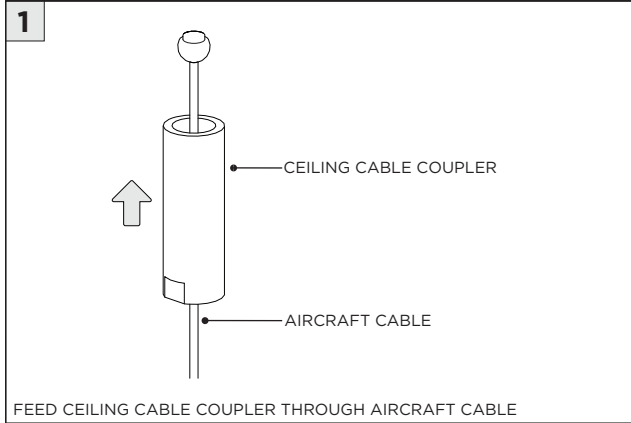

DRIVER SERVICING

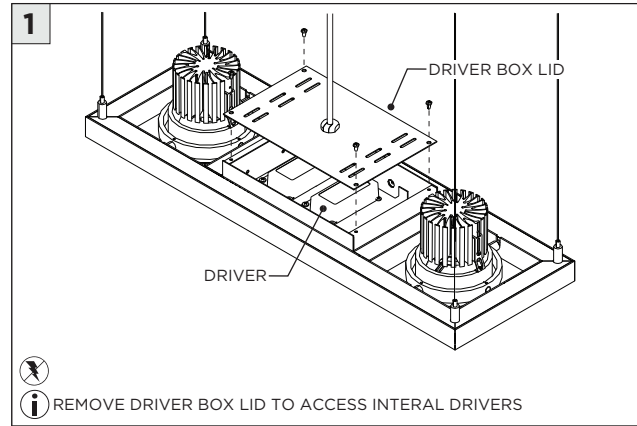

LED SERVICING

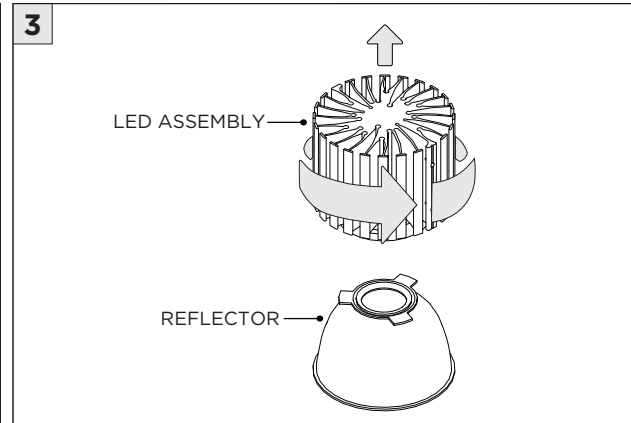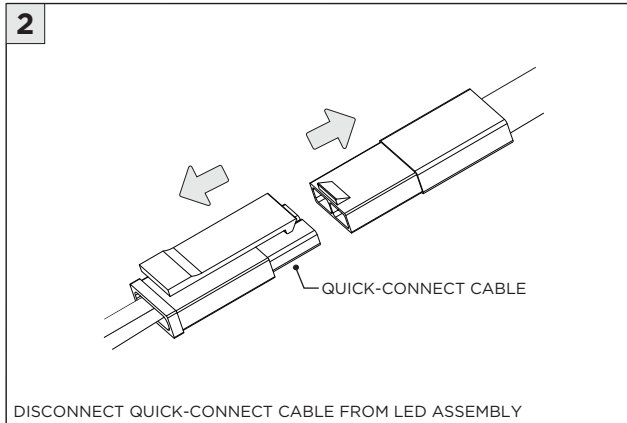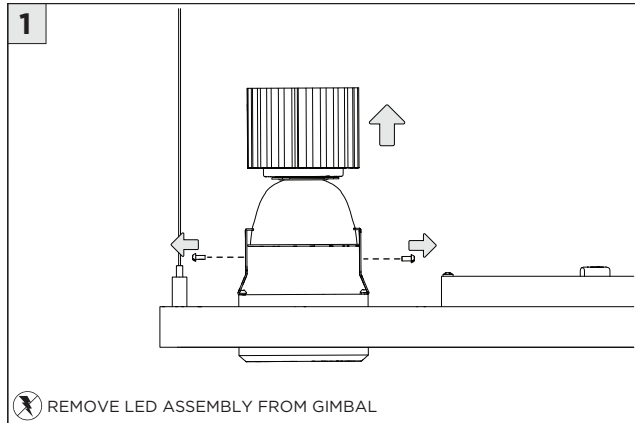


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR
SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

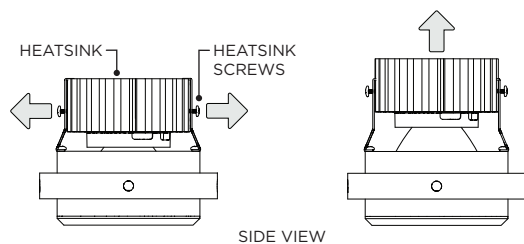


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR
OPTICAL ACCESSORY CLEARANCE

2

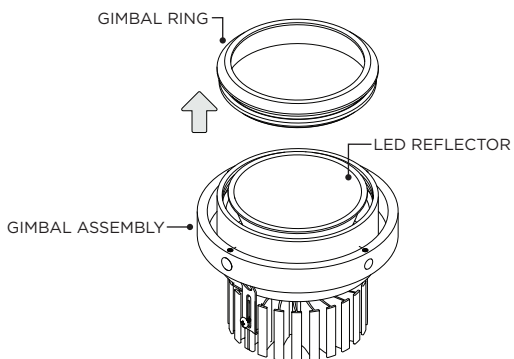


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

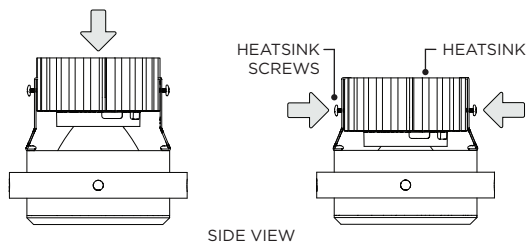

SIDE VIEW

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS