
3.3”/4.5” ROUND ADJUSTABLE DOWNLIGHT

TRIM

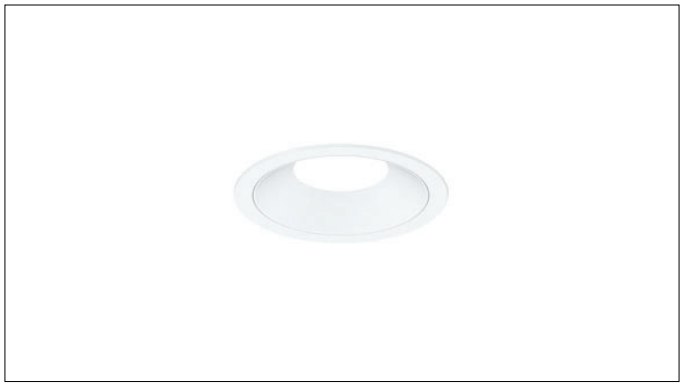


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS

RMD - REMODEL



LED INSERT




DRIVER ENCLOSURE


NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)



LED INSERT



NEW CONSTRUCTION FRAME




BAR HANGERS


SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)



LED INSERT



SHALLOW HOUSING




BAR HANGERS


NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)



LED INSERT



NEW CONSTRUCTION HOUSING



BAR HANGERS (OPTIONAL)

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING


3G LIGHTING

3.3”/4.5” ROUND ADJUSTABLE DOWNLIGHT
TRIM

INSTALLATION INSTRUCTIONS


RMD - REMODEL

1




FIXTURE TYPE	CEILING HOLE SIZE
DL33RA	⦸ 3.8125”
DL45RA	⦸ 5.1250”

2

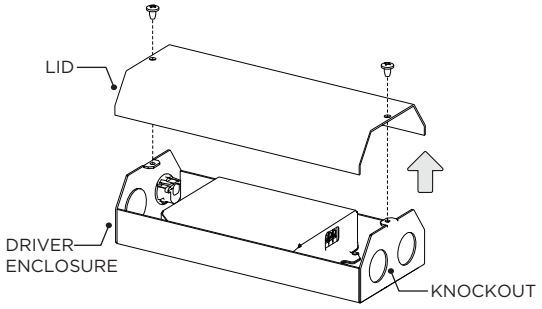

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

3

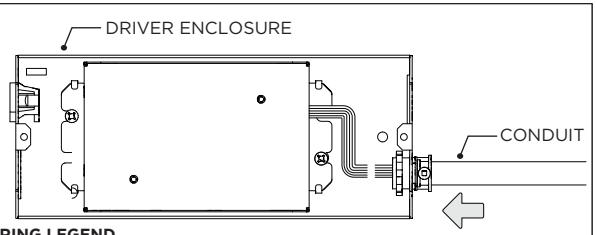


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS

4




SECURE LID ONTO DRIVER ENCLOSURE AND INSERT INTO CEILING

5

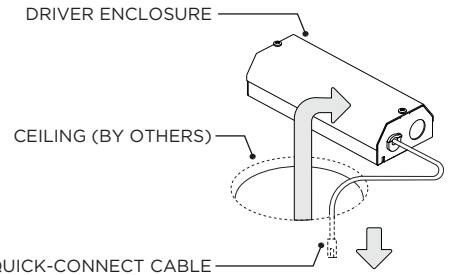


PLACE DRIVER ENCLOSURE ABOVE CEILING

6

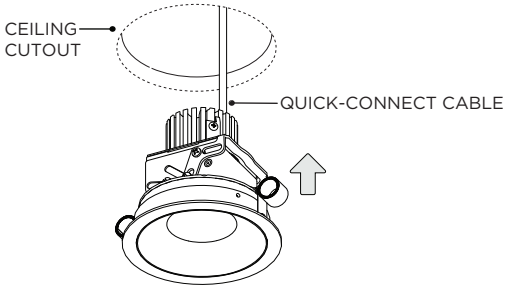


INSERT LED ASSEMBLY INTO CEILING

6A

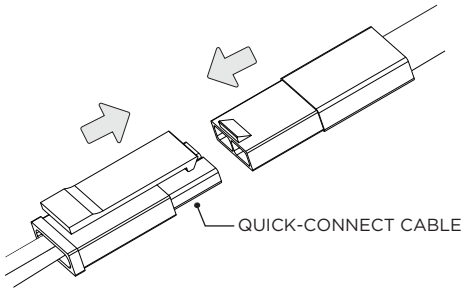


CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

6B

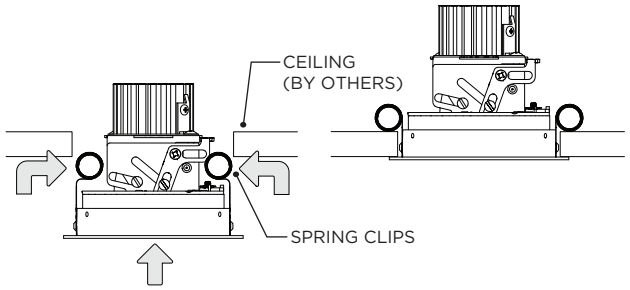


RMD - REMODEL WITH REMOTE DRIVER ENCLOSURE

1 REMOTE DRIVER WIRING

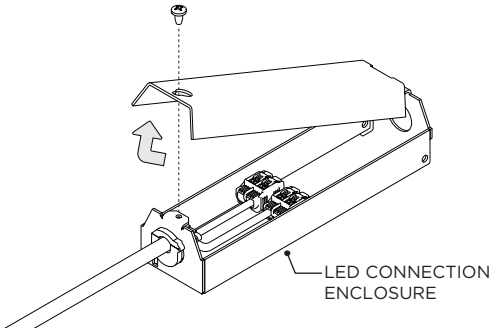

FOR REMOTE EMR DRIVER BOX, MAKE WIRED CONNECTIONS INSIDE PROVIDED LED CONNECTION ENCLOSURE

2

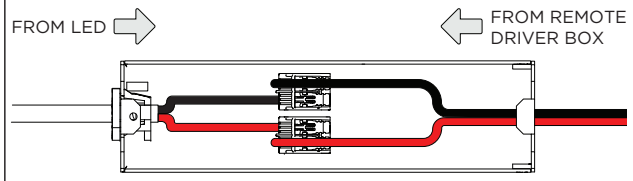

MAKE WIRING CONNECTIONS


3G LIGHTING

3.3”/4.5” ROUND ADJUSTABLE DOWNLIGHT
TRIM


INSTALLATION INSTRUCTIONS

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

1

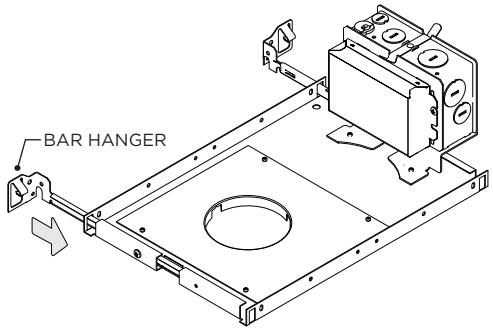


1A

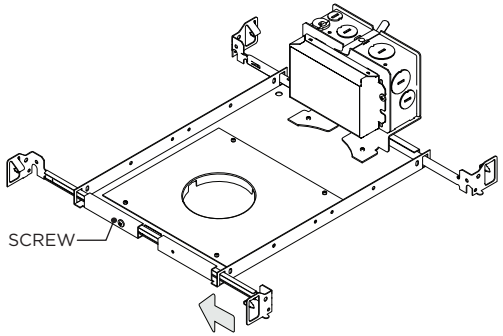


SECURE BAR HANGERS IN PLACE WITH SCREW

2

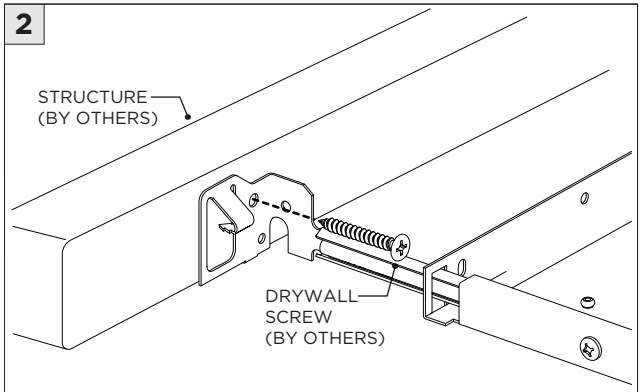


BAR HANGERS HAVE 14” to 26” EXTENSION

3

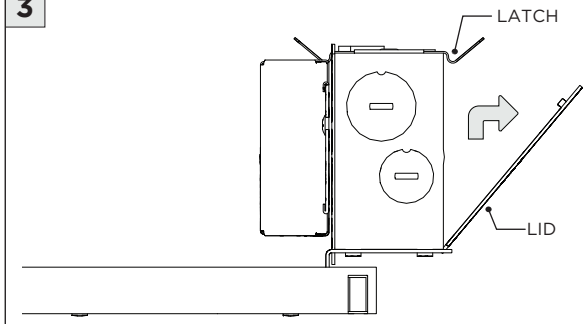

REMOVE ELECTRICAL BOX LID TO ACCESS WIRING

4

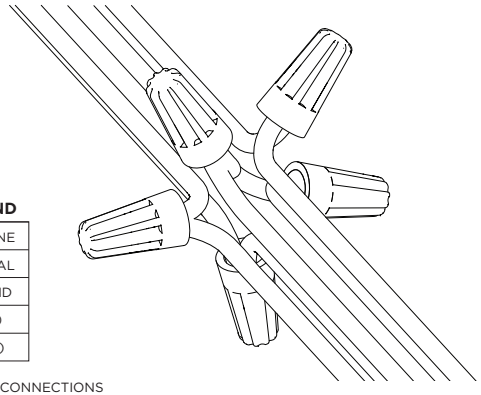


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


MAKE WIRING CONNECTIONS

5 FOR INTEGRATED BATTERY ONLY

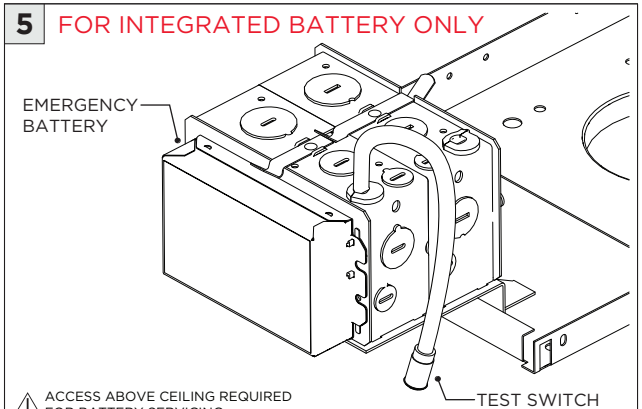


ACCESS ABOVE CEILING REQUIRED
FOR BATTERY SERVICING

6

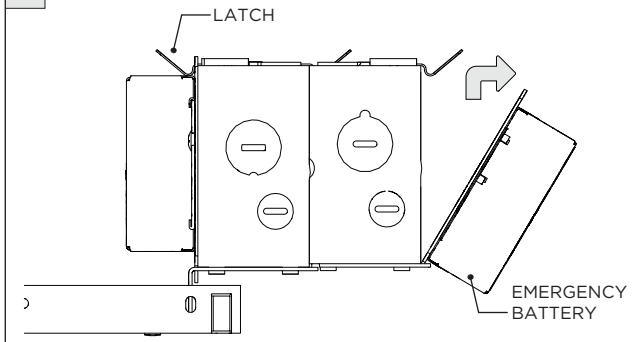

REMOVE BATTERY BOX COVER TO ACCESS WIRING

7

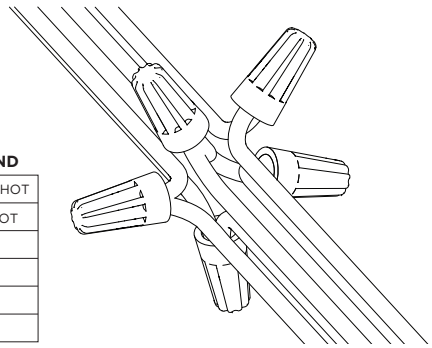


EMB WIRING LEGEND

RED	UNSWITCHED HOT
BLACK	SWITCHED HOT
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


8



FIXTURE TYPE	CEILING HOLE SIZE
DL33RA	⦸3.8125”
DL45RA	⦸5.1250”


INSTALL CEILING BELOW FIXTURE

9

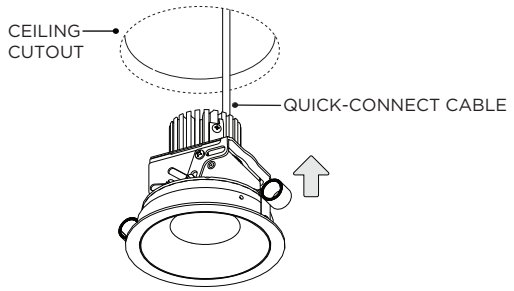


INSERT LED ASSEMBLY INTO CEILING

9A

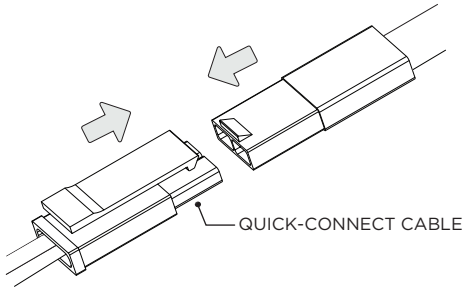

CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

9B

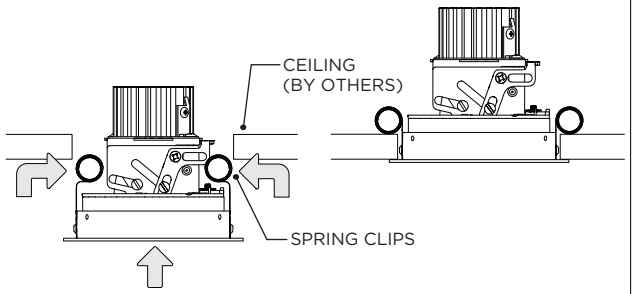


3G LIGHTING

3.3”/4.5” ROUND ADJUSTABLE DOWNLIGHT
TRIM


INSTALLATION INSTRUCTIONS

NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)


1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

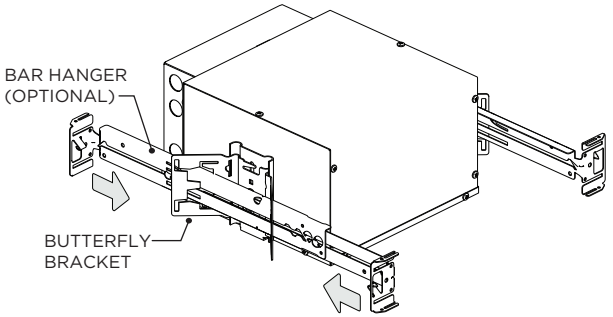

1A

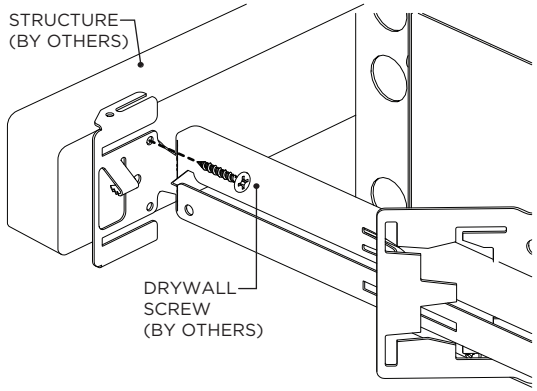


2 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

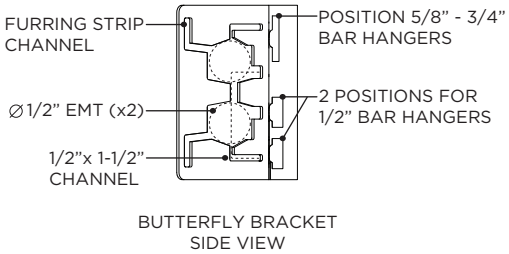

BUTTERFLY BRACKET
SIDE VIEW

3

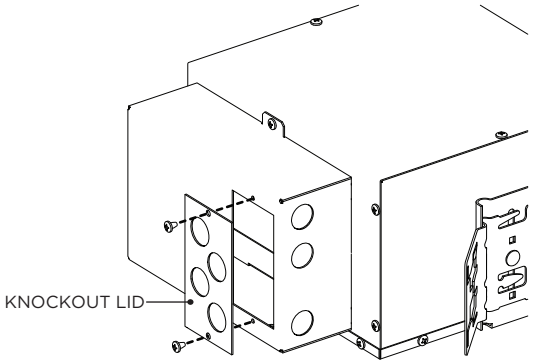


REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

3A


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

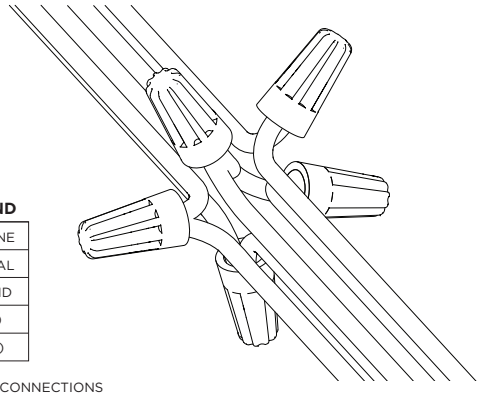

MAKE WIRING CONNECTIONS


4



FIXTURE TYPE	CEILING HOLE SIZE
DL33RA	⦰3.8125”
DL45RA	⦰5.1250”


INSTALL CEILING BELOW FIXTURE

5

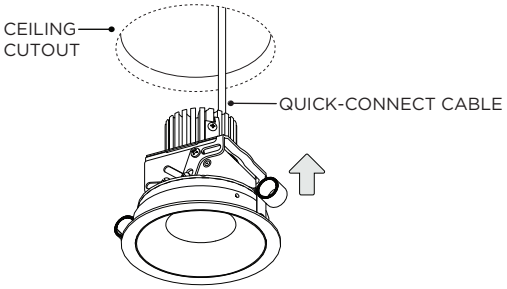


INSERT LED ASSEMBLY INTO CEILING

5A

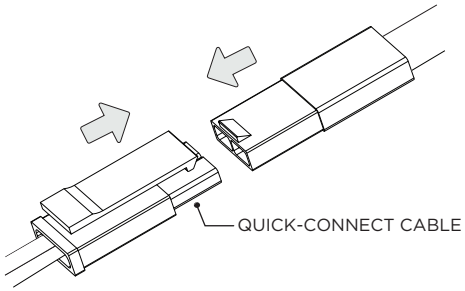

CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

5B

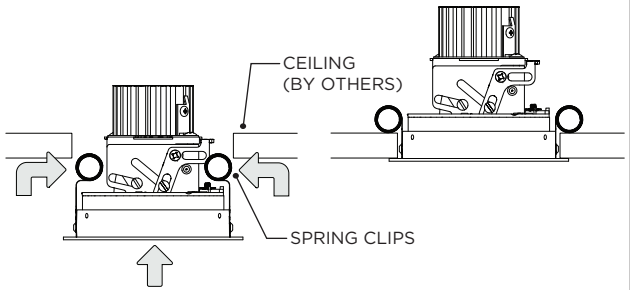


3G LIGHTING

3.3”/4.5” ROUND ADJUSTABLE DOWNLIGHT
TRIM


INSTALLATION INSTRUCTIONS

SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)

1

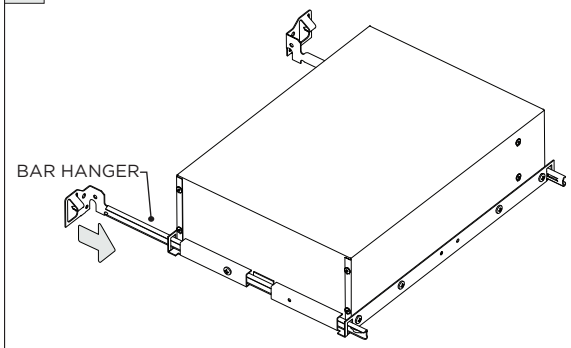


2

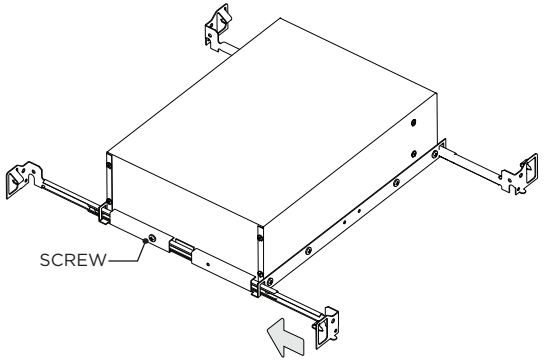


SECURE BAR HANGERS IN PLACE WITH SCREW

3

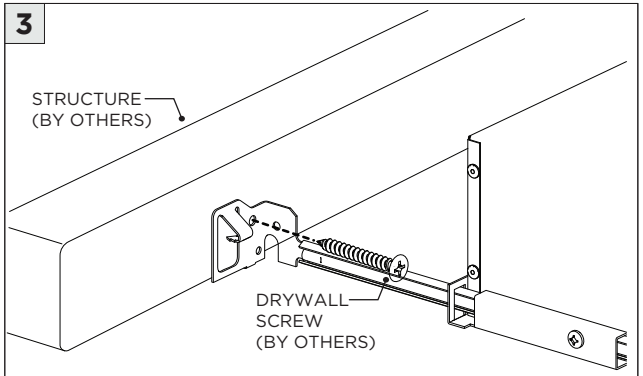


4

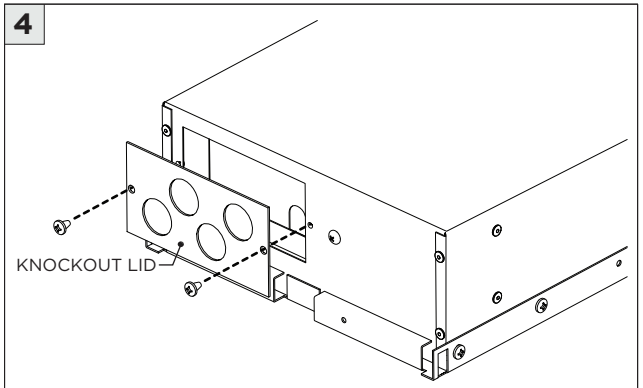

REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

4A

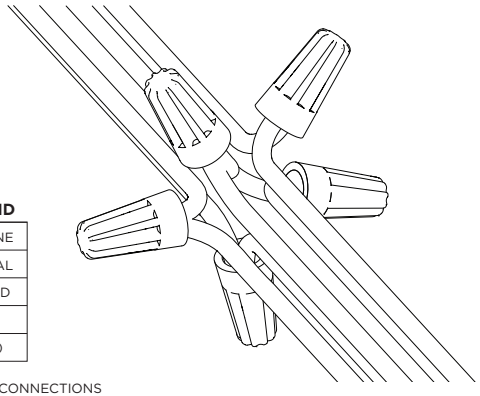


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


5



FIXTURE TYPE	CEILING HOLE SIZE
DL33RA	⦰ 3.8125”
DL45RA	⦰ 5.1250”


INSTALL CEILING BELOW FIXTURE

6

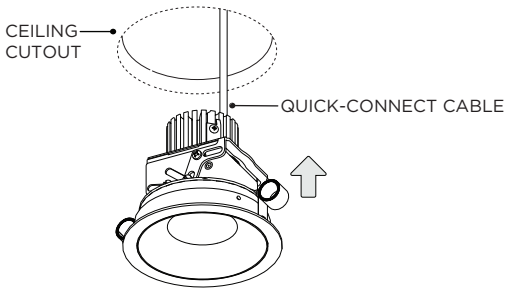


INSERT LED ASSEMBLY INTO CEILING

6A

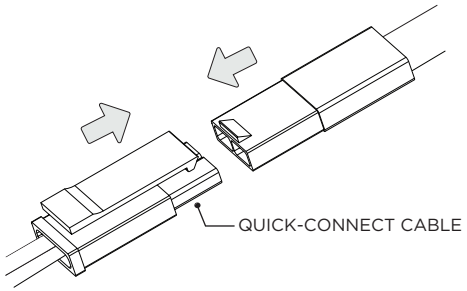


CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

6B

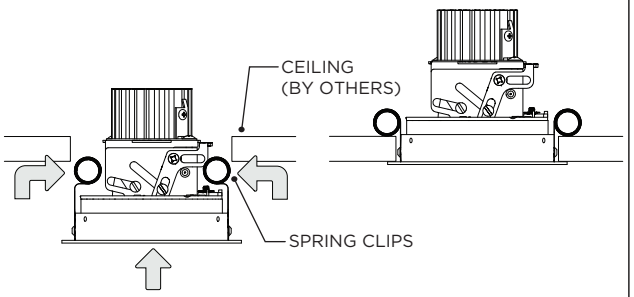


LED SERVICING

1

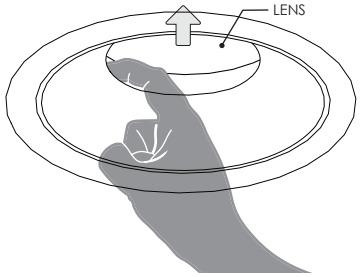


LIFT LENS AND DETATCH INSERT FROM CEILING AS SHOWN

1A

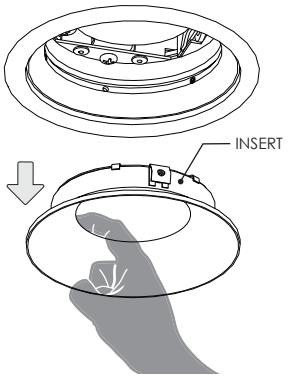


2

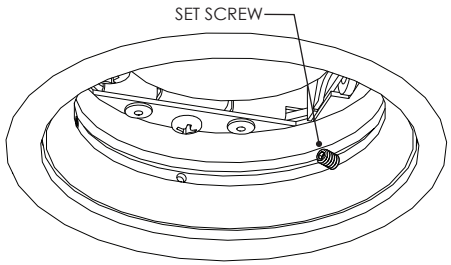

LOOSEN THREE SET SCREWS INSIDE ADAPTER RING


⚠ DO NOT FULLY REMOVE SET SCREWS FROM HOUSING

2A

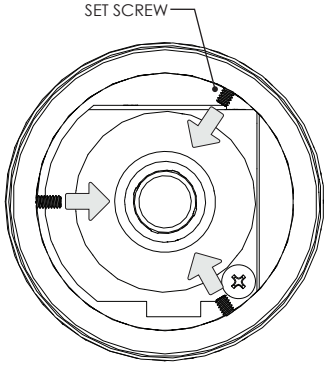


BOTTOM VIEW

3

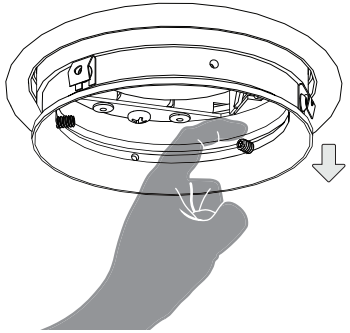


UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

4

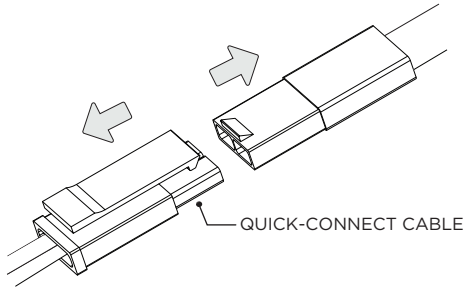


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

5

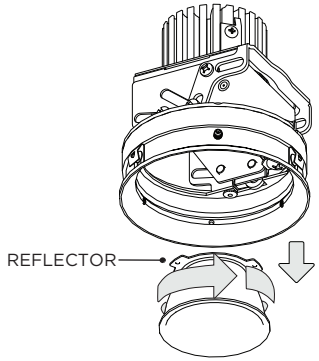

TWIST REFLECTOR TO REMOVE

6

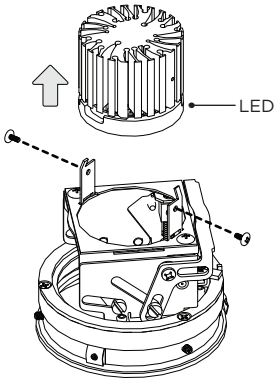


7

REVERSE STEPS 6-1 WHEN REINSTALLING LED INTO CEILING


LED ADJUSTMENT

1




LIFT LENS AND DETATCH INSERT FROM CEILING AS SHOWN

1A

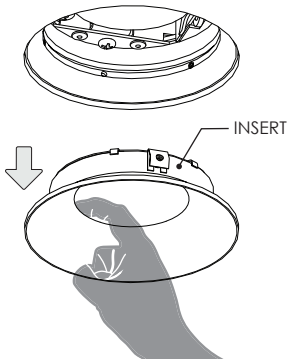


2 ANGLE ADJUSTMENT

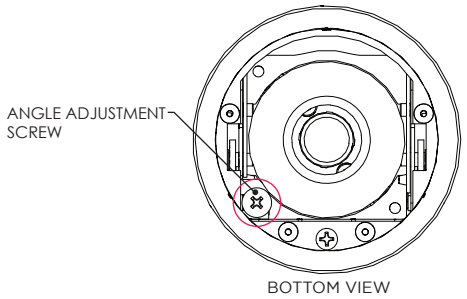


TURN SCREW TO ADJUST LED ANGLE

2A

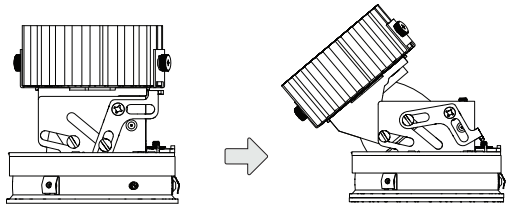


3 ROTATION ADJUSTMENT

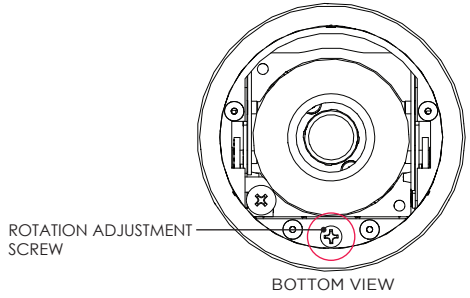

LOOSEN SCREW TO UNLOCK LED ASSEMBLY ROTATION


3A

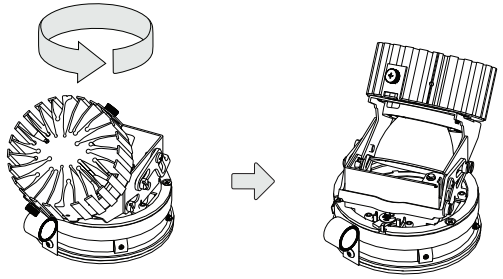

TIGHTEN SCREW AFTER ROTATING LED ASSEMBLY


DRIVER SERVICING

1 **RMD -** REMODEL

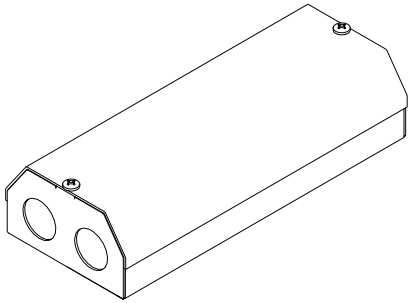


DISCONNECT POWER BEFORE SERVICING

2

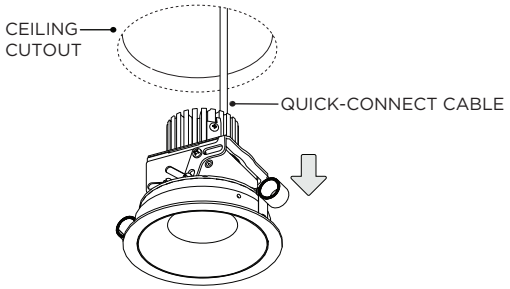


REMOVE LED ASSEMBLY FROM CEILING

2A

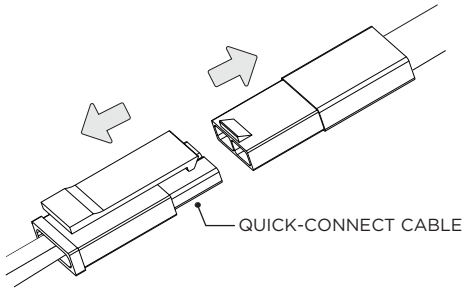


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3




4

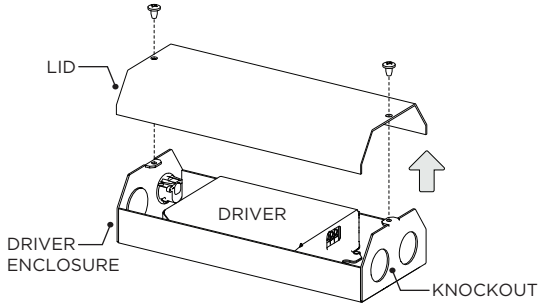


DRIVER SERVICING

1 NCF - NEW CONSTRUCTION FRAME

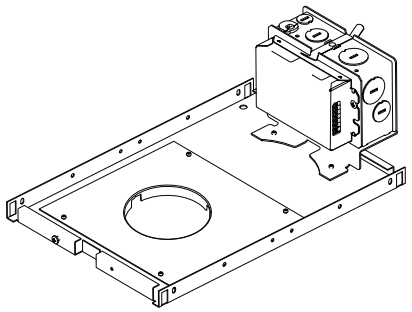


DISCONNECT POWER BEFORE SERVICING

2

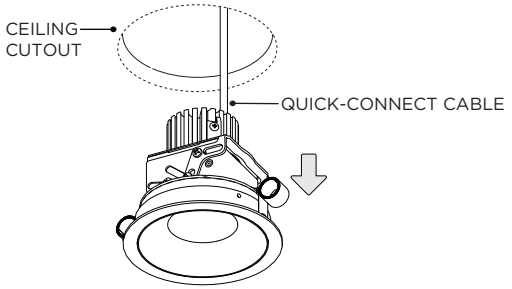


REMOVE LED ASSEMBLY FROM CEILING

2A

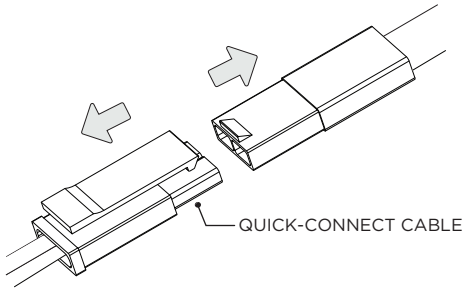


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

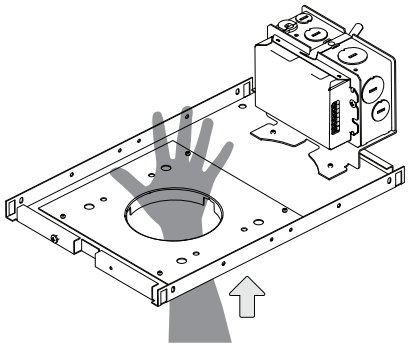


4

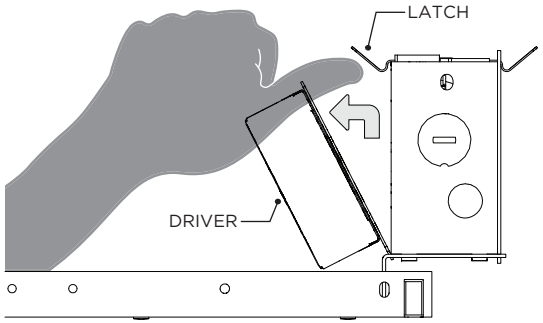

5

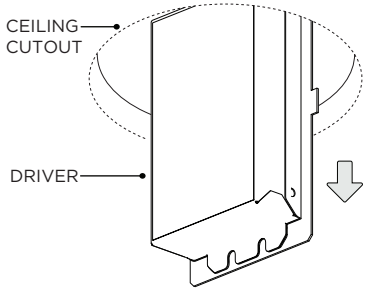


5A

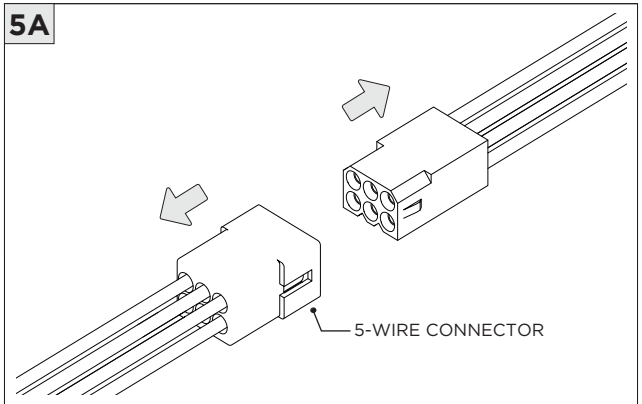

DISCONNECT 5-WIRE CONNECTOR


6 NCF - NEW CONSTRUCTION FRAME FOR INTEGRATED BATTERY ONLY

THIS UNIT UTILIZES MORE THAN ONE POWER SOURCE
DISCONNECT ALL POWER SOURCES BEFORE SERVICING

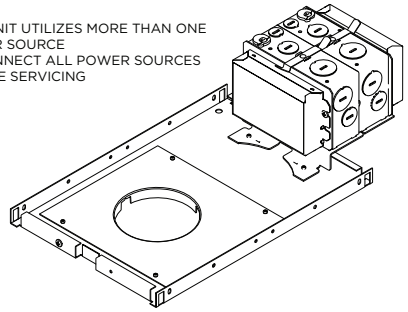

ACCESS ABOVE CEILING REQUIRED FOR DRIVER SERVICING


7

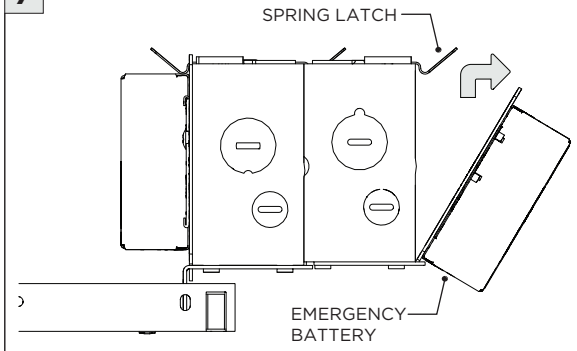

REMOVE BATTERY BOX COVER TO ACCESS WIRING


DRIVER SERVICING

1 **SH -** SHALLOW HOUSING

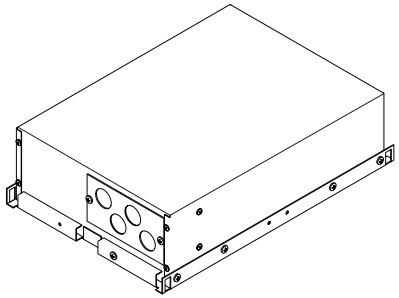


DISCONNECT POWER BEFORE SERVICING

2

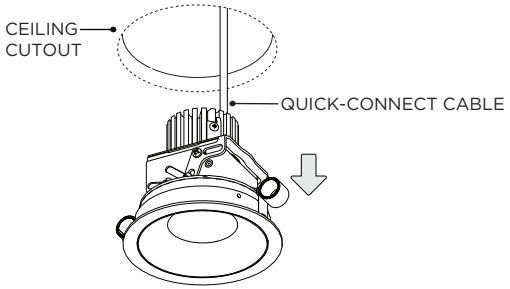


REMOVE LED ASSEMBLY FROM CEILING

2A

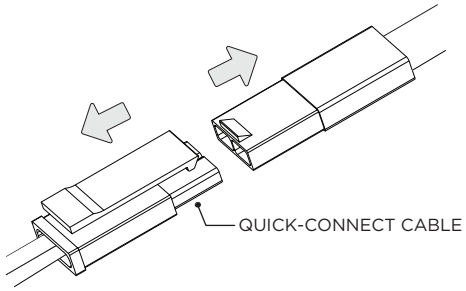


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

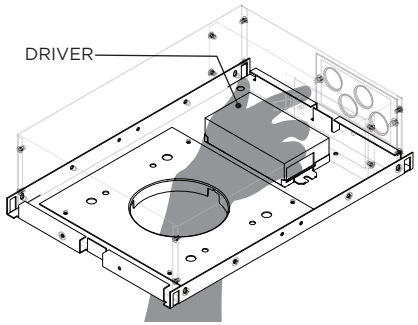


REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

4

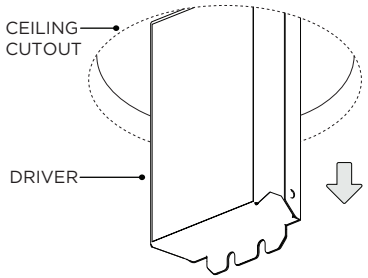


4A

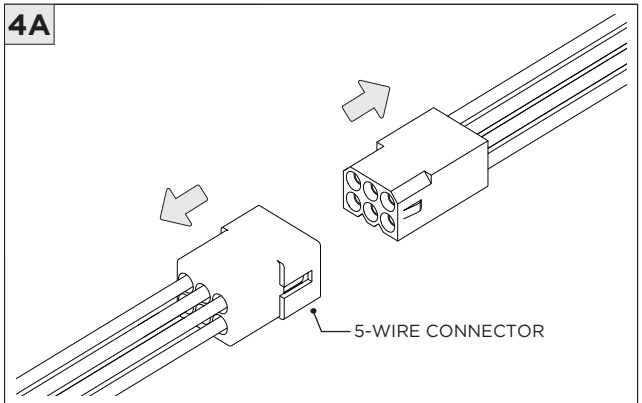

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING

1 **NC/IC -** NEW CONSTRUCTION HOUSING

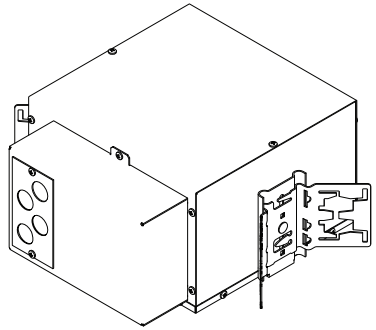


DISCONNECT POWER BEFORE SERVICING

2

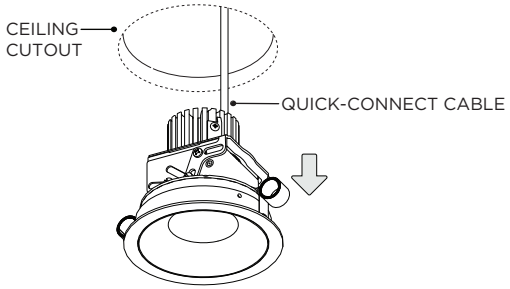


REMOVE LED ASSEMBLY FROM CEILING

2A

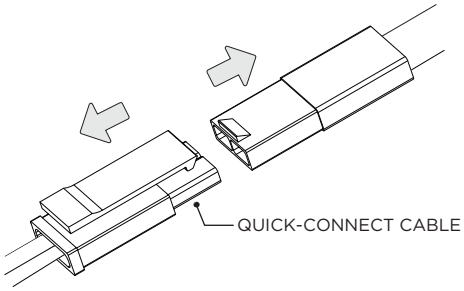


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

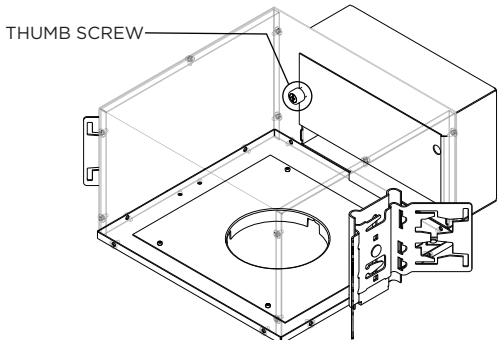


4

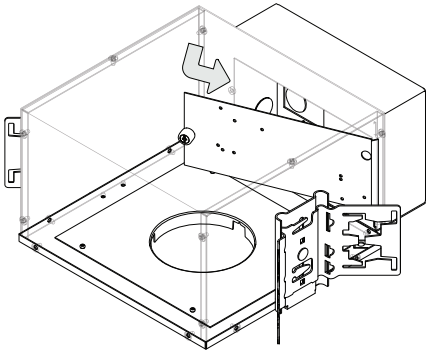

5

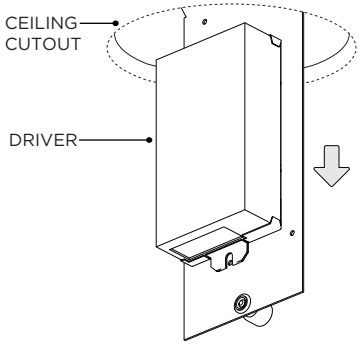

5A

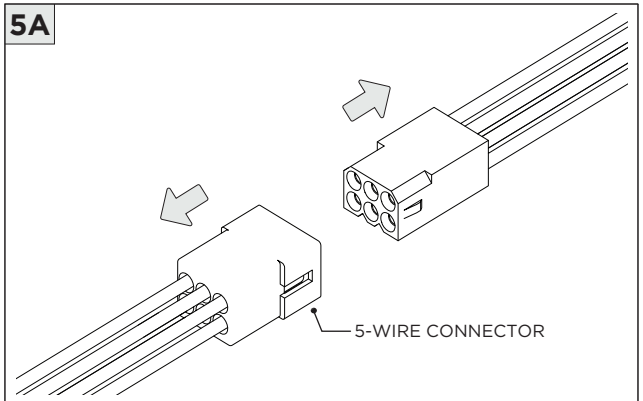

DISCONNECT 5-WIRE CONNECTOR