3G-2SLI

2" LINEAR
SURFACE MOUNTED



Narrow 1.5" aperture with one piece extruded aluminum housing
Individual or continuous runs available in multiple run configurations
Direct distribution with multiple lumen output options
High-efficacy LED performance up to 136 lumens per watt
Delivered lumen range up to 1020 lumens per foot
Extruded acrylic lens available in flush, 1" and 2" drop lens options
Widespread and Asymmetric optics available
1% dimming standard with several driver options

DLC LISTED

PROJECT:		TYPE:			
CATALOG#:		DATE:		QTY:	

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	VOLTAGE
3G-2SLI	**D250** - 250 LM/FT [1] **D500** - 500 LM/FT **D750** - 750 LM/FT **D1000** - 1000 LM/FT **DC___** - CUSTOM OUTPUT (SPECIFY LM/FT)* *Specify custom lumen outputs in 50lm increments (ie: DC600, DC650, DC700) Custom output cannot exceed D1000 DLC minimum lumen output is 500 lm/ft	**S80** - 80+ CRI [2] **H90** - 90+ CRI *DLC listing available with 80CRI	**27K** - 2700K **30K** - 3000K **35K** - 3500K **40K** - 4000K *DLC listing available with 35K	**UNV** - 120/277V **347** - 347V [3]

DRIVER	LENS OPTION	FINISH	OPTIONS
DIM - 0-10V (100-1%) **D01** - 0-10V (100-0.1%) **DALI** - DALI (100-1%) [4] **DHL2** - LUTRON HI-LUME (1% ECOSYSTEM) **DMX** - DMX (100-0%)	**FL** - FLUSH LENS **DD1** - 1" DROP LENS [5] **DD2** - 2" DROP LENS [5] **DWSO** - WIDESPREAD LENS (BATWING) **DASY** - ASYMMETRIC LENS	**WH** - WHITE **BK** - BLACK **SV** - SILVER All mounting canopies provided in white as standard	**EMB** - EMERGENCY BATTERY * (INTEGRAL) **EMC** - EMERGENCY CIRCUIT *Minimum 4' section


RUN TYPE
S - ____' (STRAIGHT) *
L - ____'X ____' (L-SHAPE)
U - ____'X ____'X ____' (U-SHAPE)
R - ____'X ____' (RECTANGLE/SQUARE)
T - ____'X ____' (T-SHAPE)
X - ____'X ____' (X-SHAPE)
CUS - ____ (CUSTOM LAYOUT - PROVIDE DRAWING)
*Individual units available from 2' to 8' Continuous runs available in 1" increments as standard


1 D250 (250LM/FT) not available in 2' length. Specify minimum DC350
2 S80 (80+ CRI) not available with 27K
3 347 available in "DIM" 0-10V only (100-1%)
4 DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options
5 DD1 (1" drop lens) and DD2 (2" drop lens) available with straight run type only


DLC LISTED
DLC listing starting at 500 lumens per foot (D500)
Available with 80CRI and 3500K


DELIVERED LUMENS PER FOOT BASED ON 80+ CRI 3500K LED SOURCE


LENS OPTION

FLUSH	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	2.0	125
	500	4.0	125
	750	6.6	114
	1000	8.8	114

1" DROP	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	2.0	125
	500	4.0	125
	750	6.6	114
	1000	8.8	114

2" DROP	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	2.0	125
	500	4.0	125
	750	6.6	114
	1000	8.8	114

WIDESPREAD	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	2.0	128
	500	3.9	128
	750	6.0	126
	1000	8.1	123

ASYMMETRIC	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	1.9	133
	500	3.8	133
	750	5.7	132
	1000	7.8	128

LUMEN OUTPUT MULTIPLIERS

COLOR TEMP	80+ CRI	90+ CRI
2700K	N/A	0.78
3000K	0.97	0.83
3500K	1.00	1.00
4000K	1.02	1.02

HOUSING

Extruded aluminum housing with narrow 2” aperture
Die cast aluminum end caps add 1/4” to each end of luminaire
Individual units and continuous runs available in 1” increments as standard
24-gauge LED reflector with high reflectance white powder coated finish
Standard polyester powder coated matte white finish. Optional finishes available

OPTICS

Extruded, satin acrylic lens designed for optimal performance and glare control. Up to 8’ continuous
Lens options include flush, 1” and 2” drops with illuminated end caps for all drop lenses
High performance asymmetric optics available

LED SYSTEM

Proprietary LED system with color consistency <3 SDCM
Available in 27K, 30K, 35K, and 40K
Standard 80+CRI. Optional 90+CRI
R9 value of 56 for 90+CRI
L90 >60,000 hours
5 Year Warranty

ELECTRICAL

Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
Luminaires are pre-wired with factory installed quick connects and branch circuit wiring
All drivers are integral and easily accessible through luminaire aperture

EMERGENCY

Integral batteries operate minimum 4′ and maximum 6′ sections.
15W output (1980lm) for 90 minutes. Title 24 Certified
4′ section (+/- 495lm per foot at 80+ CRI)
5′ section (+/- 395lm per foot at 80+ CRI)
6′ section (+/- 330lm per foot at 80+ CRI)

MOUNTING


Toolless installation with 3G’s proprietary mounting system
Internal, toolless joiner system (latch and hook) easily connects multiple sections together
LED reflectors remain within each fixture section during installation with 3G’s click and lock spring system
Not suitable for direct attachment to T-grid framing
Suitable for various architectural ceilings (see mounting details)
Fixture weight: +/- 2.5 lb/ft


LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 NO.250.0. Rated for indoor dry or damp locations
DLC certified. Consult factory for details

WARRANTY


5 Year Warranty on LED and drivers
Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

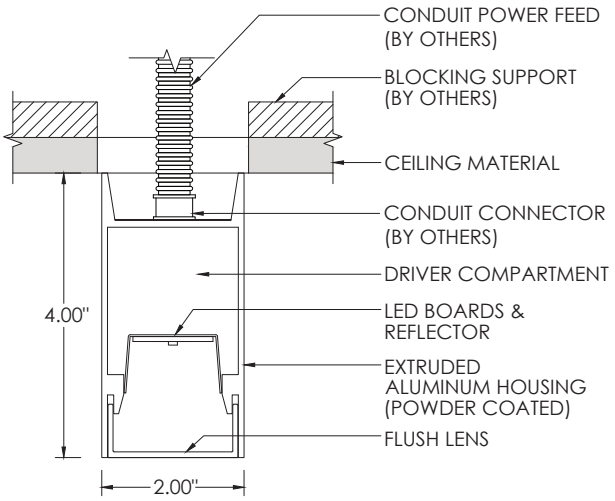

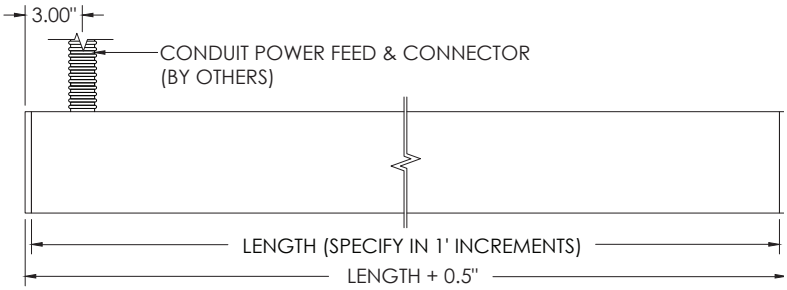


LENS OPTION


FL - FLUSH




DD1 - 1" DROP




DD2 - 2" DROP





DWSO - WIDESPREAD



DASY - ASYMMETRIC




MOUNTING DETAILS

POWER FEED	NON POWER FEED
CONDUIT POWER FEED & CONNECTOR (BY OTHERS) 	MOUNTING SCREWS (BY OTHERS) 


PATTERNS

Specify pattern shape and overall dimensions as shown below
Patterns are connected with fully illuminated 12"x12" L, T, and X-shaped sections
Please consult factory for custom patterns and shapes not shown below




L-SHAPE	U-SHAPE	RECTANGLE/SQUARE	T-SHAPE	X-SHAPE
Provide dimensions of AxB Example: **L** - 6'x8'	Provide dimensions of AxBxC Example: **U** - 8'x10'x6"	Provide dimensions of AxB Example: **R** - 10'x8'	Provide dimensions of AxB Example: **T** - 14'x6'	Provide dimensions of AxB Example: **X** - 14'x14'

TYPICAL SECTION MOUNTING

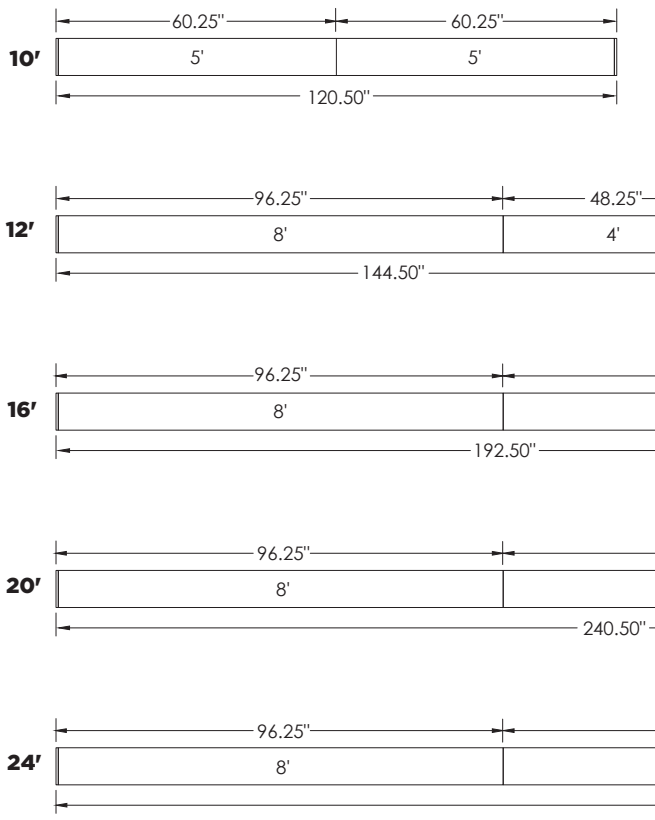

TOOLLESS INSTALLATION
WITH 3G'S PROPRIETARY JOINER SYSTEM



NOTE:
Run lengths and configurations not shown are available in 1" increments as standard