


3G LIGHTING

3G-DL33SWW

3" SQUARE WALL WASH DOWNLIGHT
DIM TO WARM


Standard 90+ CRI Dim to Warm LED system (3000K-1800K)
Regressed LED source for enhanced glare control
Proprietary wall wash optic and lens
Available with Lutron Awn for wireless control
Companion to 3G's Cylinder, G-RO, and 3Gi product families

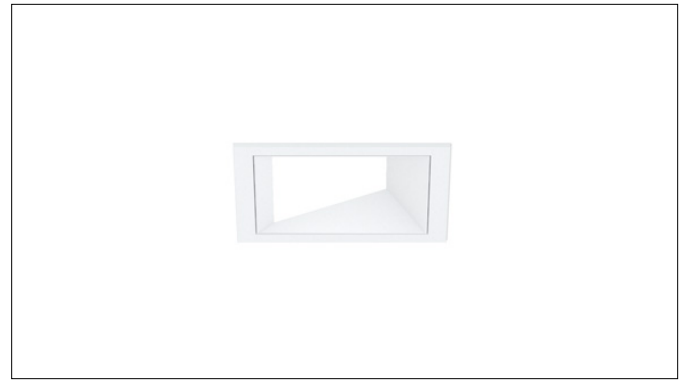


TRIM FLANGE




TRIMLESS



MILLWORK



OPTICS




PERFORMANCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
750	750	12.3	61
1000	1000	17.1	59
1250	1250	22.5	56
1500	1500	27.7	54


BASED ON 90+ CRI, 3000K, WW OPTIC
Lumen output and actual wattage may vary +/- 5%

DIMENSIONS


TRIM FLANGE

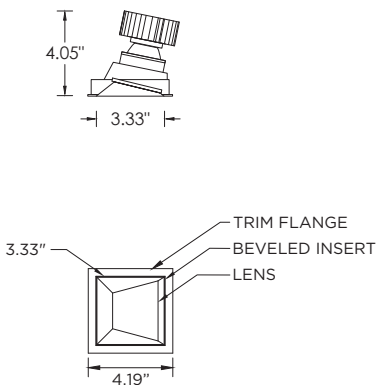

TRIMLESS

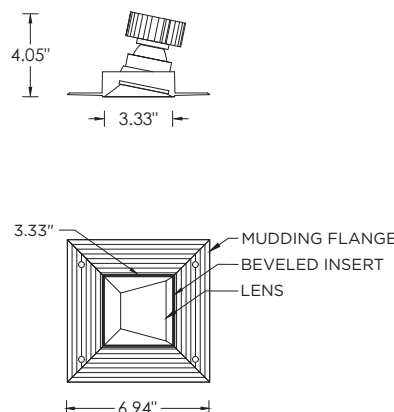

MILLWORK

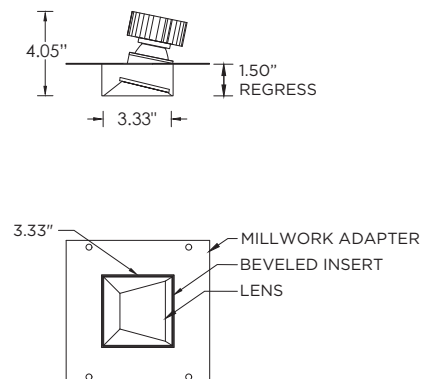



3GD - Dim to Warm

PROJECT:		TYPE:			
CATALOG#:		DATE:		QTY:	

CAT. NO	LED SOURCE	LUMEN OUTPUT	CRI	BEAM ANGLE	VOLTAGE
3G-DL33SWW	DW - DIM TO WARM (3000K-1800K)	07 - 750 LUMENS 10 - 1000 LUMENS 12 - 1250 LUMENS 15 - 1500 LUMENS All lumen outputs are delivered lumens at 90+ CRI	H90 - 90+ CRI	WW - WALL WASH	UNV - 120/277V 120 - 120V 347 - 347V ¹

DRIVER	FLANGE TYPE	BEVELED INSERT	HOUSING TYPE
DIM - 0-10V (100-1%) LE - PHASE DIM ² (TRIAC/ELV, 100-1%) D01 - 0-10V (100-0.1%) DALI - DALI (100-1%) ³ DMX - DMX (100-0%) DHL2 - LUTRON HI-LUME LDE1 (1% ECOSYSTEM)	WT - WHITE TRIM BT - BLACK TRIM ST - SILVER TRIM XTR - TRIMLESS (MUD-IN DRYWALL) MWF - FLANGELESS ⁴ MILLWORK	WI - WHITE BI - BLACK SI - SILVER	RMD - REMODEL (NON-IC) NCF - NEW CONSTRUCTION FRAME (NON-IC) SH - SHALLOW HOUSING ⁵ (IC RATED & CP RATED) NC - NEW CONSTRUCTION HOUSING IC - NEW CONSTRUCTION ⁵ IC HOUSING
NCF and SH housings ship with nailer type bar hangers. NC and IC housings available with optional C-channel bar hangers			

OPTIONS	
AWN	AWN - LUTRON ATHENA RF NODE ⁶
CP	CP - CHICAGO PLENUM ⁷
BH	BH - C-CHANNEL BAR HANGERS
EMR	EMR - EMERGENCY BATTERY (REMOTE) ⁸
EMB	EMB - INTEGRAL EMERGENCY BATTERY ⁹ (ABOVE CEILING ACCESS REQUIRED)



Lutron Athena Wireless Node (AWN) available with DIM (0-10V) driver option
See page 8 for more details

- 1** 347 available in "DIM" 0-10V only (100-1%)
2 Phase dimming options available in 120V only
3 DALI-2 (Type 6) provided as standard
4 MWF not available with Remodel (NON-IC)
5 Shallow Housing available up to 750lm. New Construction IC housing available up to 1000lm
6 Available with DIM driver option. Available with NCF (New construction frame) and RMD (Remodel) housings only. Not available with EMR or EMB
7 Chicago Plenum option available with Shallow Housing (750lm max) and New Construction Housing
8 Enclosure supplied with Emergency Battery and driver. Installed remotely by others. Not accessible through fixture aperture. LED operates at 6500K
9 Available with NCF housing option only. Above ceiling access required. Not accessible through fixture aperture. LED operates at 6500K

3GD - Dim to Warm

PERFORMANCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
750	750	12.3	61
1000	1000	17.1	59
1250	1250	22.5	56
1500	1500	27.7	54

BASED ON 90+ CRI, 3000K, WW OPTIC
Lumen output and actual wattage may vary +/- 5%

HOUSING

Remodel, new construction frame, shallow housing, new construction and IC housing options available
Maximum ceiling thickness of 1.5". Consult factory for modifications
All housing options (except millwork) designed to be easily converted in field to trim or trimless with minimal components
Housing rated for #12 AWG (4 in, 4 out), 90°C conductors and through branch wiring

BEVELED INSERT

Cast aluminum beveled insert with matte powder coated finish
Regressed LED source for enhanced glare control

TRIM

Machined aluminum trim flange with matte powder coated finish and minimal 0.375" overlap

TRIMLESS

Mudding flange features a perforated surface for easy mud-in application
Integral blocking support provided to ensure fixture is properly secured within ceiling structure

OPTICS

Proprietary wall wash optic
Asymmetrical lens provides uniformity and smooth illumination across and down the wall
Regressed LED source for enhanced glare control

LED SYSTEM

Standard 90+ CRI
Dim to Warm (3000K-1800K)
Color consistency <3 SDCM
L90 > 42,000 hours

ELECTRICAL

Standard 0-10V, constant current drivers
100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
120V Forward Phase/Reverse Phase driver option (100-1%)
Integral drivers are easily accessible through luminaire aperture

EMERGENCY

7W output for 90 minutes (+/- 430lm at 90+ CRI). Title 24 Certified
Integral emergency battery (above ceiling access required)
Remote emergency battery (not accessible through fixture aperture)
Maximum remote mounting distance:
3000lm or below - 50ft (12AWG) or 25ft (14AWG)
Caution: Emergency Battery utilizes more than one power source and servicing should be performed by qualified personnel

MOUNTING

Trim fixture designed for use in drywall, wood, acoustic, and other architectural ceilings
Trimless fixture designed for use in drywall, mud-in ceiling applications
Recommended cut-out for Millwork Flangeless option (3.625"x3.625")
Recommended cut-out for other housing options (3.938"x3.938")
New construction frame and IC rated shallow housing ship with nailer type bar hangers (14" to 26" extension)
Optional C-Channel bar hangers available for NC and IC housing options


LISTING

ETL listed and conforms to UL1598 standard
Certified to CSA22.2 NO.250.0.
Rated for dry or damp locations


WARRANTY

5 year limited warranty
LED system rated for operation in ambient environments up to 25°C


RMD - REMODEL (NON-IC)

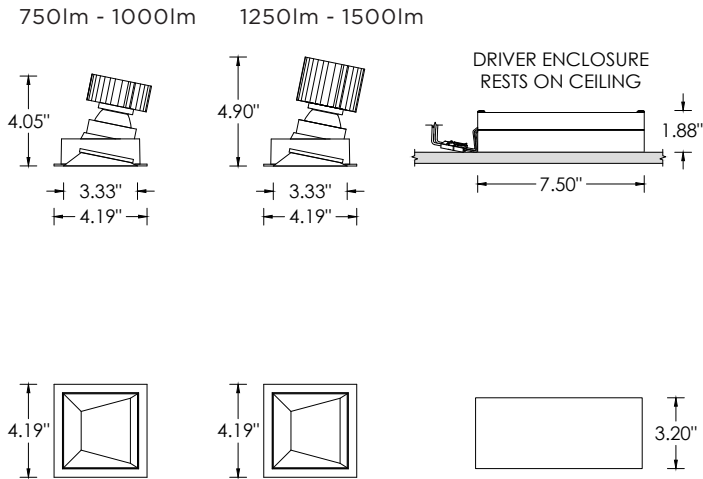


NCF - NEW CONSTRUCTION FRAME (NON-IC)

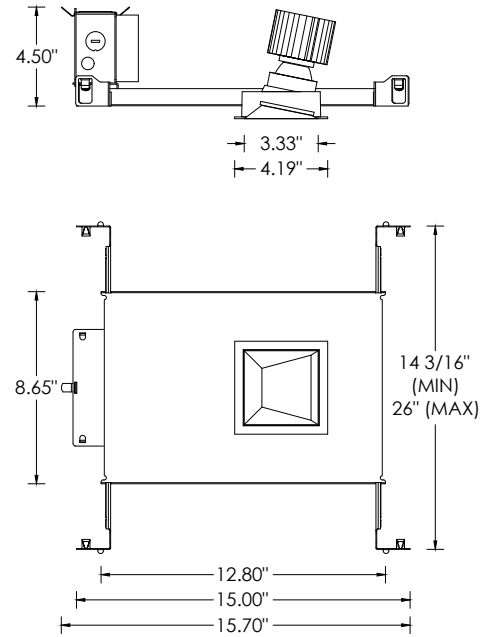


SH - SHALLOW HOUSING (750LM MAX)
(IC RATED AND CP RATED)

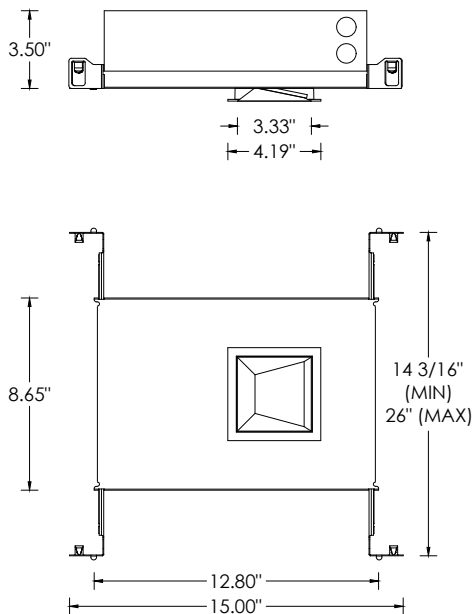


NC- NEW CONSTRUCTION HOUSING (NON-IC AND CP RATED)
IC - NEW CONSTRUCTION IC HOUSING (1000LM MAX)

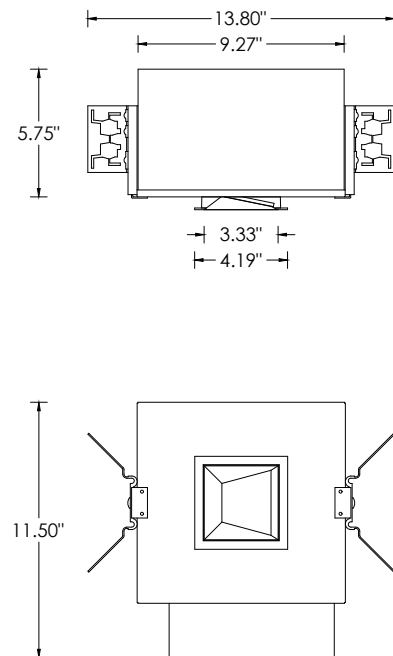


RMD - REMODEL (NON-IC)

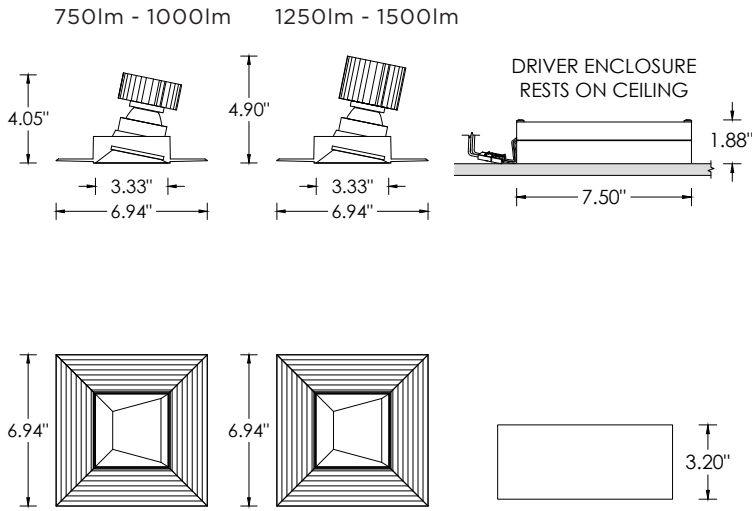


NCF - NEW CONSTRUCTION FRAME (NON-IC)

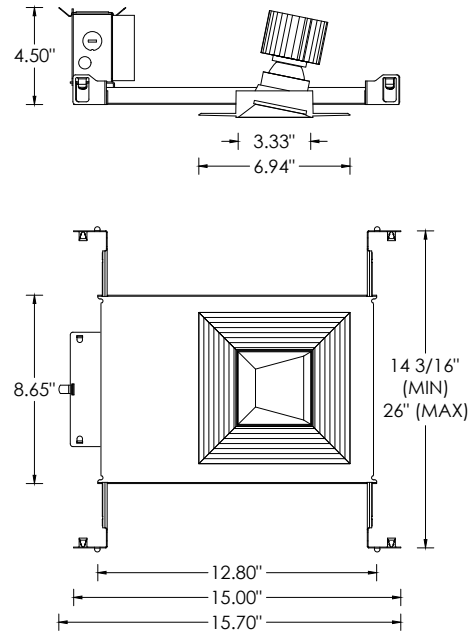


**SH - SHALLOW HOUSING (750LM MAX)
(IC RATED AND CP RATED)**

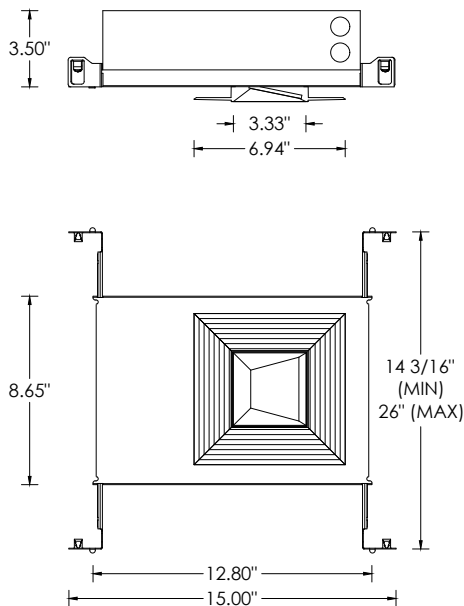


**NC- NEW CONSTRUCTION HOUSING (NON-IC AND CP RATED)
IC - NEW CONSTRUCTION IC HOUSING (1000LM MAX)**

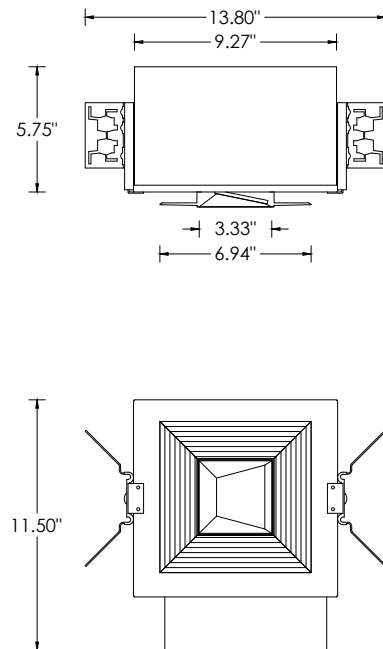


NCF - NEW CONSTRUCTION FRAME (NON-IC)

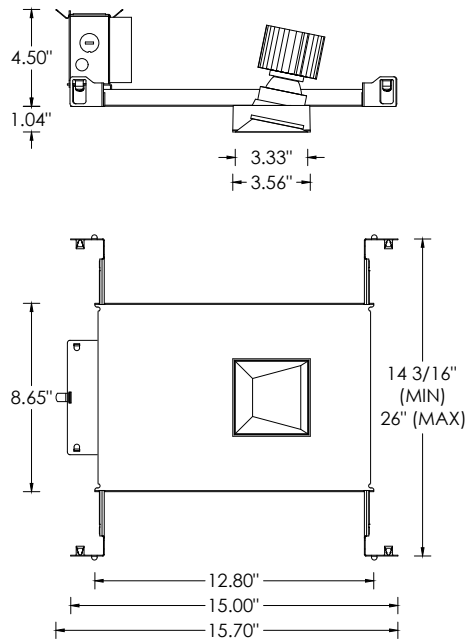


**SH - SHALLOW HOUSING (750LM MAX)
(IC RATED AND CP RATED)**

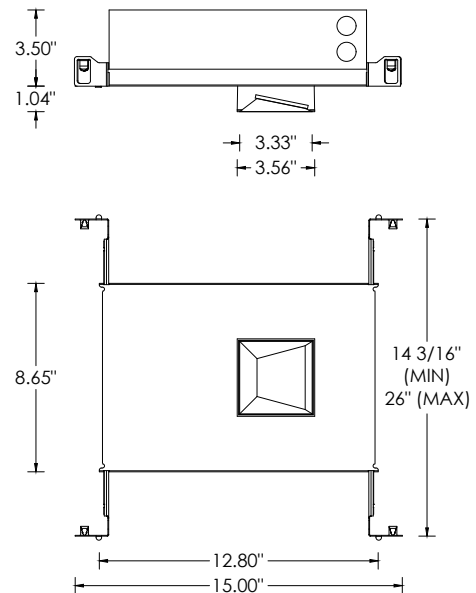


**NC- NEW CONSTRUCTION HOUSING (NON-IC AND CP RATED)
IC - NEW CONSTRUCTION IC HOUSING (1000LM MAX)**

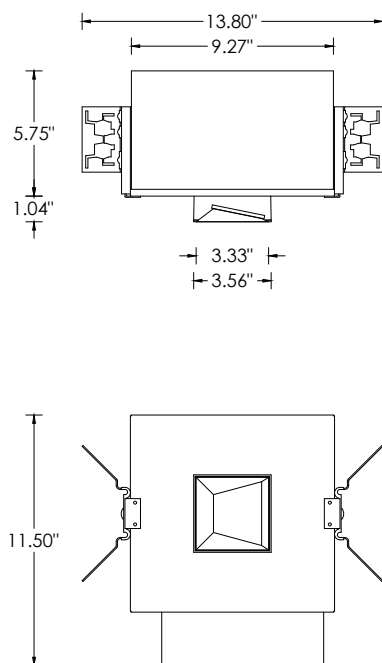


TRIM

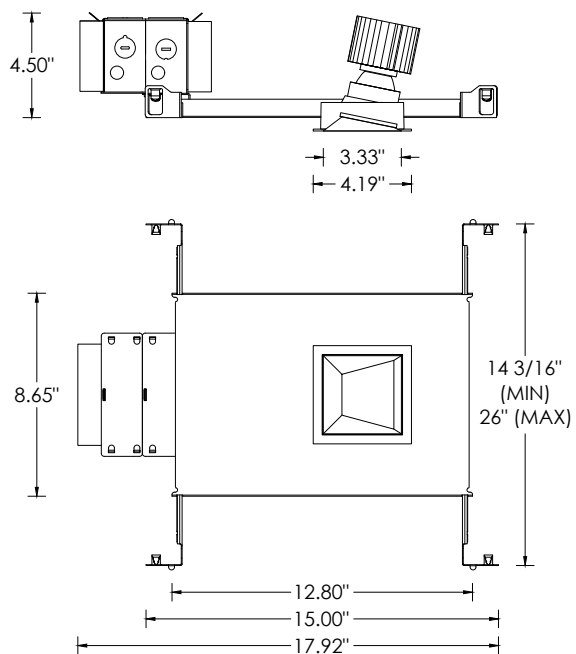

XTR - TRIMLESS (MUD-IN DRYWALL)

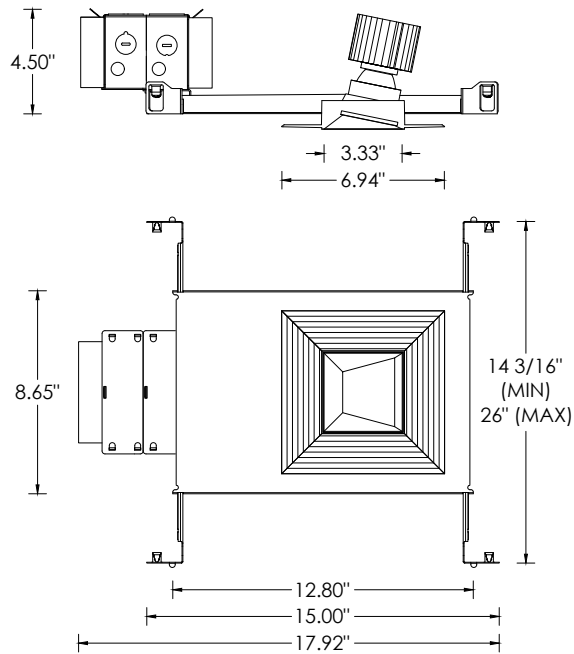

MWF - FLANGELESS MILLWORK

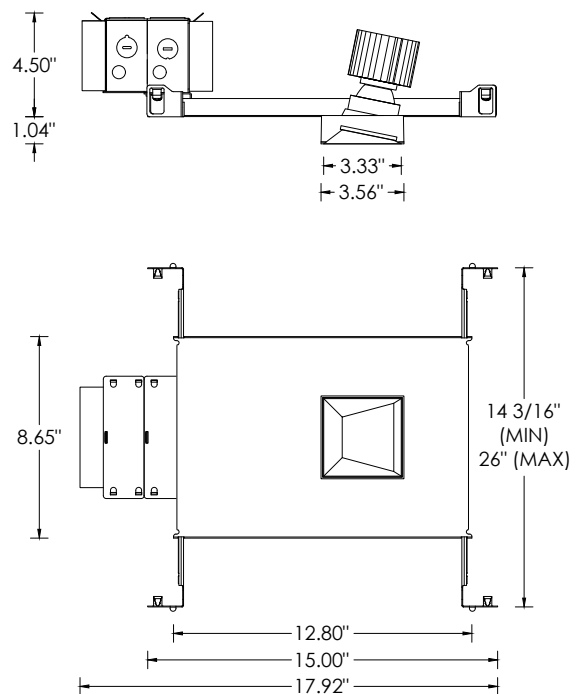


The Athena wireless node (AWN) is a radio frequency (RF) device that enables simple, digital control of individual light fixtures in an Athena or myRoom XC control system. AWN is offered as a factory-installed RF control option across select 3G luminaires.

The Athena wireless processor or Clear Connect gateway – Type X is required to operate an Athena wireless node in an Athena or myRoom XC control system via a simple setup process using an iOS® or Android® compatible app. This enables these fixtures to be controllable by other Lutron wall controls, keypads, sensors, Pico remote controls, etc



AWN
RF NODE ONLY
FACTORY-INSTALLED
FOR INDIVIDUAL
FIXTURE CONTROL

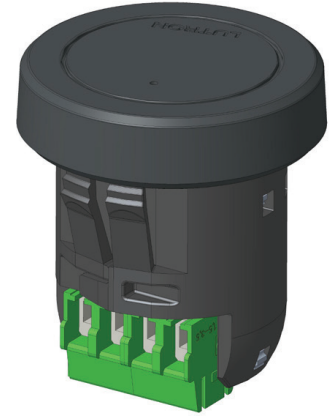

HOUSING AND DRIVER COMPATIBILITY


Housing types:

- NCF (New Construction, non-IC)
- RMD (Remodel, non-IC)


Driver / dimming types:

- DIM - 0-10V (100-1%)

RMD - REMODEL (NON-IC)

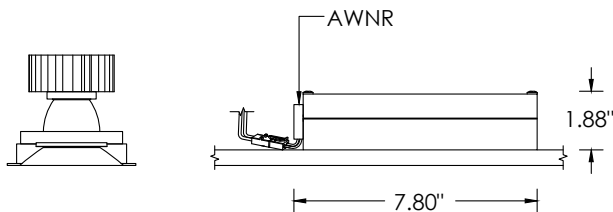

NCF - NEW CONSTRUCTION FRAME (NON-IC)

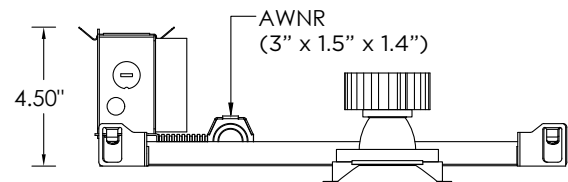

DEFAULT BEHAVIOR PRIOR TO PROGRAMMING

Light level defaults to 100%

Device runs an unprogrammed startup sequence until added to the Athena system

RF PLACEMENT (FIELD GUIDELINE)

Each node should be installed within 25 ft (7.6 m) of two or more Clear Connect – Type X devices (nodes / gateways / processors)
Follow Lutron Athena design guidelines for device density and coverage

SERVICING

Accessible through luminaire aperture

If the Awnr node is replaced, it must be re-added / re-commissioned within the Athena system by the controls contractor.