

3G LIGHTING

3G-PMZ8

8" ZOIE PENDANT

8" linear pendant with narrow 1.14" aperture and extruded aluminum housing
 Regressed LED source with enhanced glare control and UGR <16
 Standard 90+ CRI LED system with performance up to 134 LPW
 Delivered lumen range up to 2000lm at 90+ CRI
 15° to 55° beam angle options suitable for various applications
 Matte black and matte white multi faceted louvers
 Companion to 3G's Zoie product family



PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
3G-PMZ8	10 - 1000 LUMENS 15 - 1500 LUMENS 20 - 2000 LUMENS <small>All lumen outputs are delivered lumens at 90+ CRI</small>	H90 - 90+ CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	15D - 15° 35D - 35° 55D - 55°	UNV - 120/277V 120 - 120V

DRIVER	HOUSING FINISH	LOUVER FINISH	CABLE LENGTH
DIM - 0-10V (100-1%) LE - PHASE DIM (TRIAC/ELV, 100-1%) ¹ RD01 - 0-10V (100-0.1%) RDALI - REMOTE DALI (100-1%) ² RDMX - REMOTE DMX (100-0%) RDHL2 - REMOTE LUTRON (100-0%)	BK - BLACK WH - WHITE SV - SILVER	BLV - BLACK WLV - WHITE	60" - 60" 120" - 120"

OPTIONS
BCN - BLACK CANOPY BC - BLACK POWER CABLE EMR - EMERGENCY BATTERY (REMOTE)

¹ Phase dimming option available in 120V only

² DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options

PERFORMANCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000	1000	8.0	125
1500	1500	13.7	109
2000	2026	18.9	107

BASED ON 90+ CRI, 3500K, 35D OPTIC

Lumen output and actual wattage may vary +/- 5%

MULTIPLIERS

BEAM ANGLE	
15D	0.94
35D	1.00
55D	0.80

COLOR TEMP	
2700K	0.94
3000K	0.97
3500K	1.00
4000K	1.07

HOUSING

Extruded aluminum housing with narrow 1.5" aperture

Machined aluminum end caps

Standard polyester powder coated housing finish available in matte white, black, and silver

OPTICS

Proprietary multi-faceted reflectors with UGR <16

Beam angles available in 15°, 35°, and 55°

1.14" apertures with enhanced glare control

Matte black or matte white faceted louver finish

ELECTRICAL

Standard 0-10V, constant current drivers

100-1% dimming range and >0.9 power factor

120V Forward Phase/Reverse Phase driver option (100-1%)

Integral and remote driver options available

Integral driver options easily accessible through luminaire aperture

LED SYSTEM

Standard 90+ CRI, <2 SDCM

Available in 27K, 30K, 35K, and 40K

L90 > 60,000 hours

MOUNTING

Adjustable aircraft cable suspension with locking fastener

White cable and white mounting canopies provided as standard

Suitable for various architectural ceilings (see mounting details)

LISTING

ETL listed and conforms to UL1598 standard

Certified to CSA22.2 NO.250.0.

Rated for dry locations

WARRANTY


5 year limited warranty

LED system rated for operation in ambient environments up to 25°C


REMOTE DRIVER OPTIONS

3G DRIVER CODE	DIMMING METHOD	DIMMING RANGE	VOLTAGE	MAX. DISTANCE	NUMBER OF 3G-RMZ8
RD01	0-10V	100-0.1%	120-277V	100ft (12AWG)	1 to 2
RDALI	DALI	100-1%	120-277V	100ft (12AWG)	1 to 2
RDMX	DMX	100-0.1%	120-277V	100ft (12AWG)	1 to 2
RDHL2	LUTRON ECOSYSTEM	100-0.1%	120-277V	100ft (12AWG)	1


REMOTE DRIVER ENCLOSURE

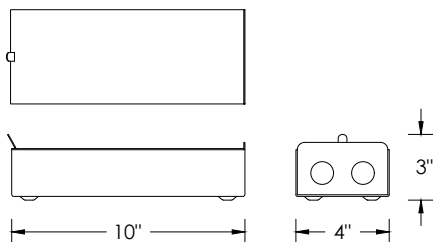


WIRING DIAGRAM

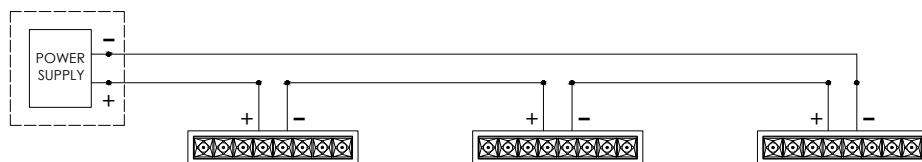

Multiple Zoie fixtures must be connected in series

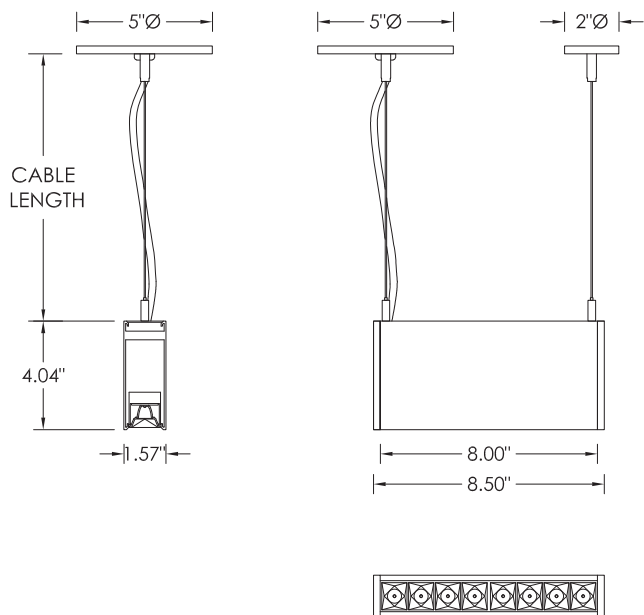

BEAM ANGLE

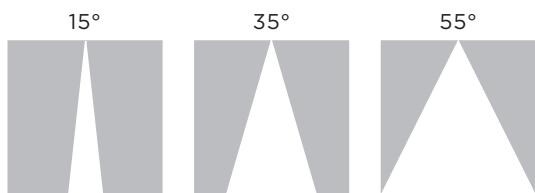

MOUNTING DETAILS

