

4.5" MINI MADISON CYLINDER - PENDANT


STEM PENDANT MOUNT




THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

COMPONENTS


STANDARD CANOPY

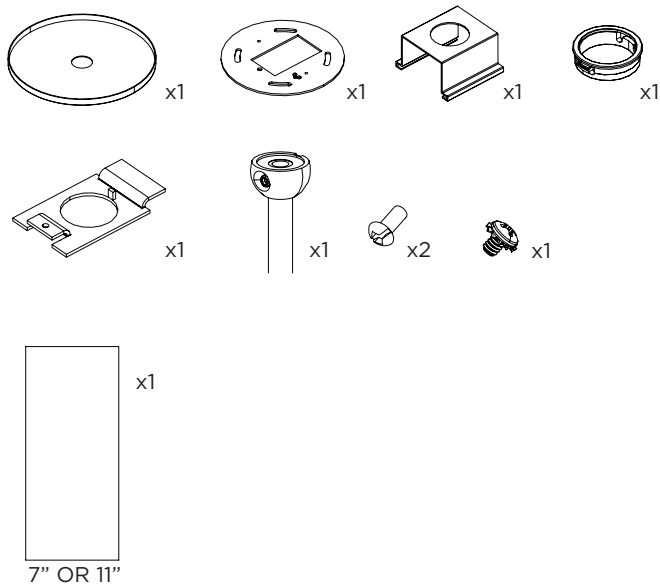


CONDUIT FEED CANOPY

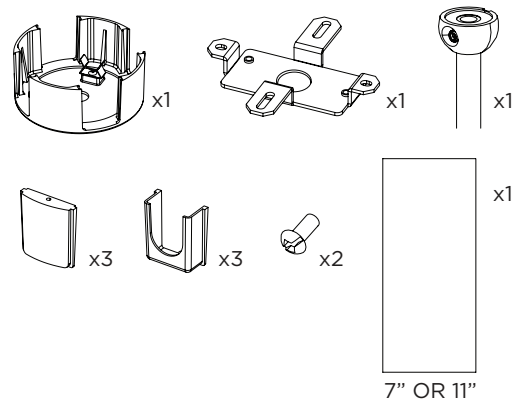


POWER CANOPY

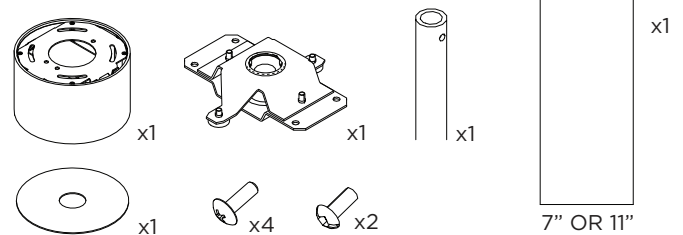

4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

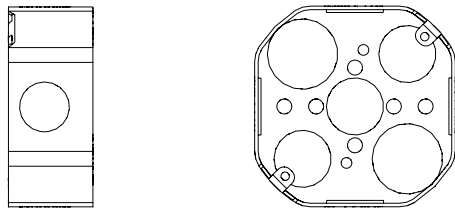


JUNCTION BOX (BY OTHERS)

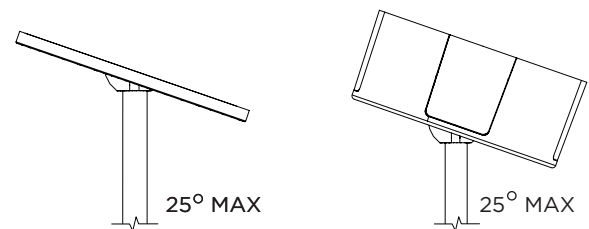SUITABLE FOR SLOPED CEILING


INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
 ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
 POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

1A

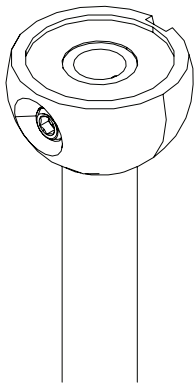


CUT STEM LENGTH
IF APPLICABLE


1B

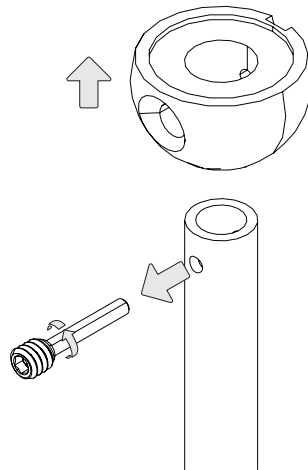


1C

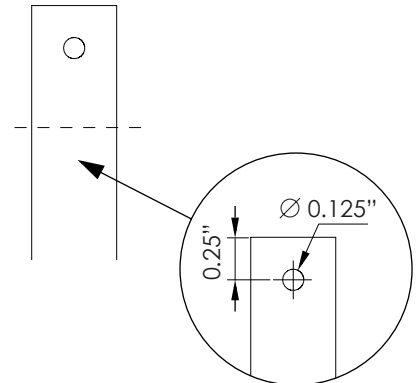


2

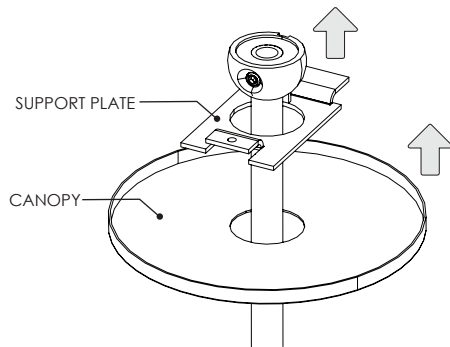


3

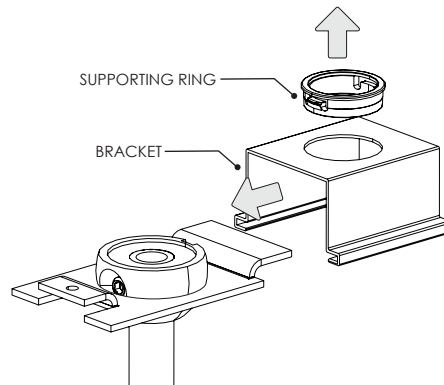


4A

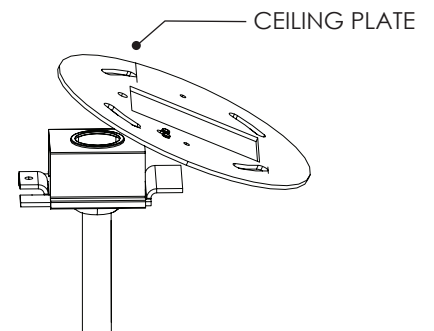


4B




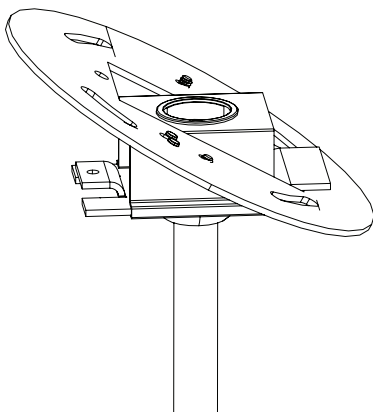


4C

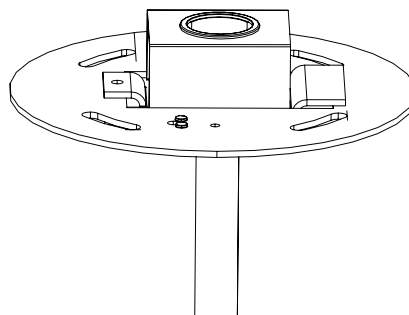


5

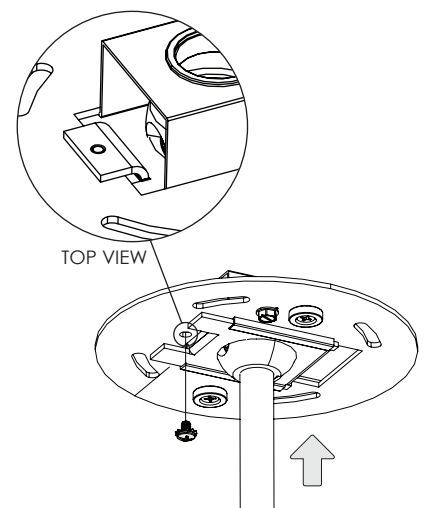

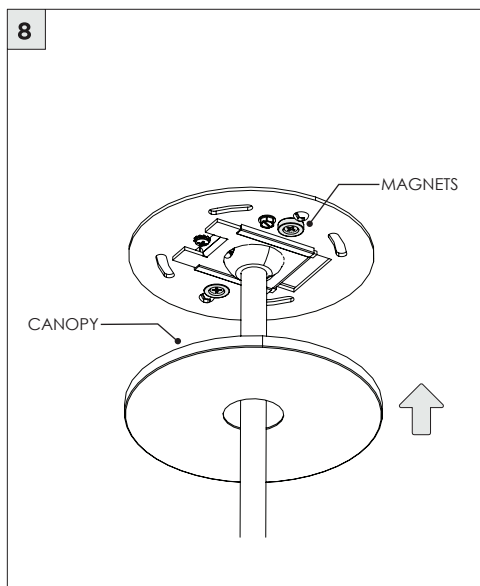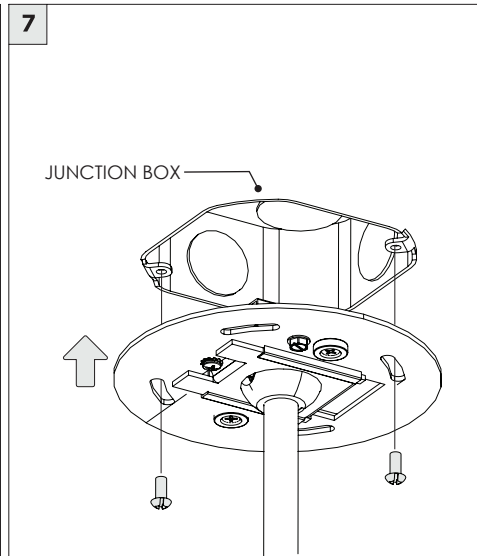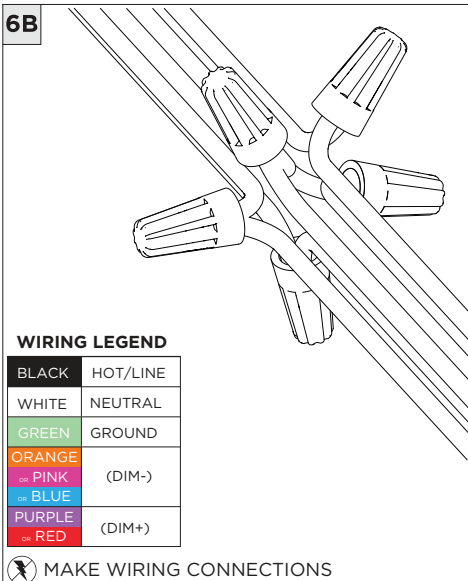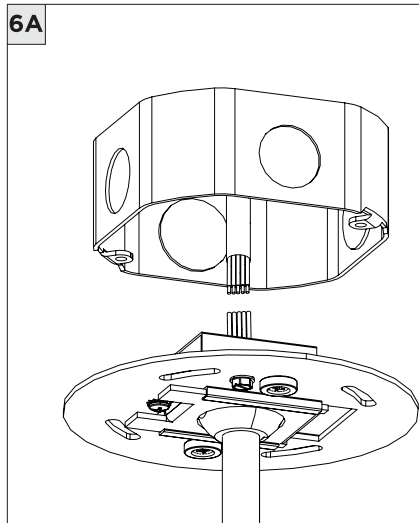


1A

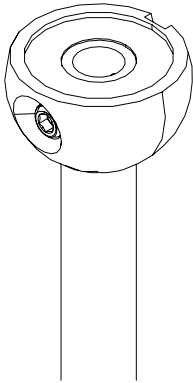


CUT STEM LENGTH
IF APPLICABLE


1B

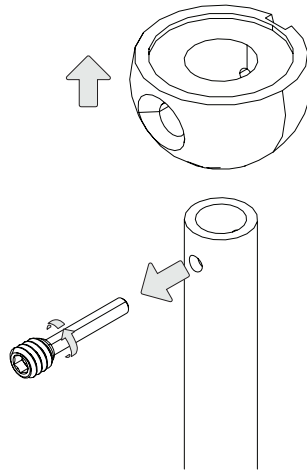


1C

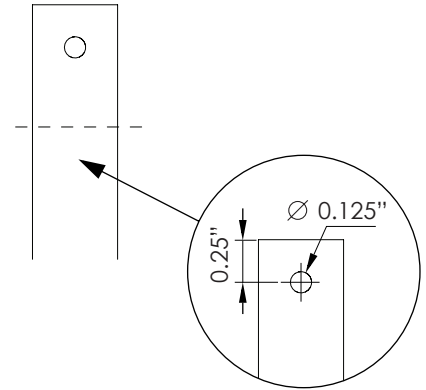


2

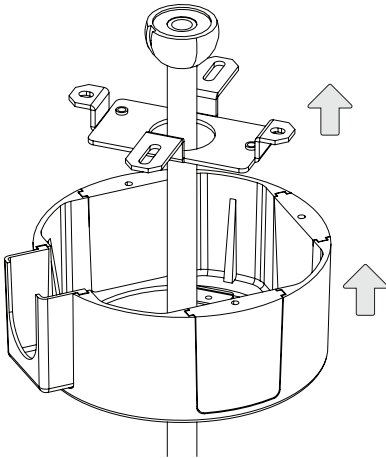

3A

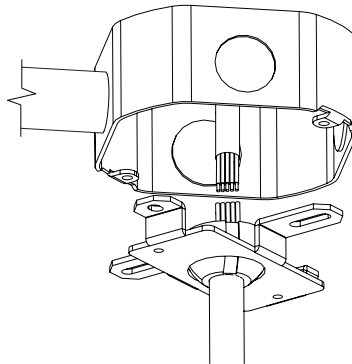

3B

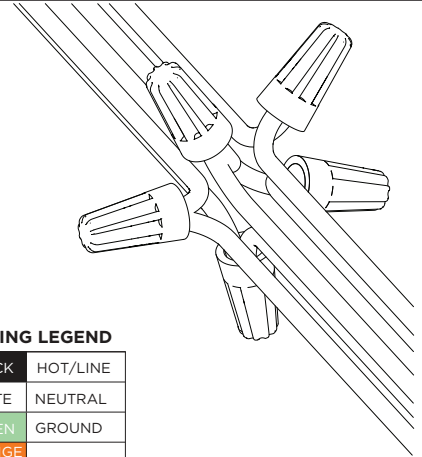


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PINK	(DIM+)
BLUE	
PURPLE	
RED	


MAKE WIRING CONNECTIONS

4

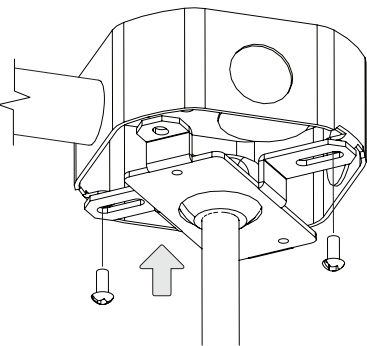


ENSURE BRACKET ORIENTATION MATCHES
CONDUIT FEED REQUIREMENT

5


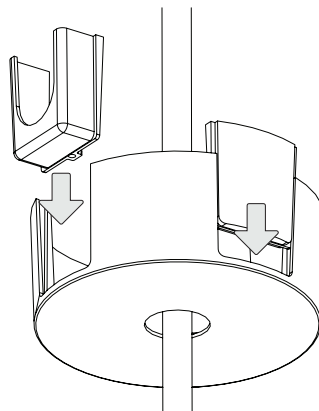


6A

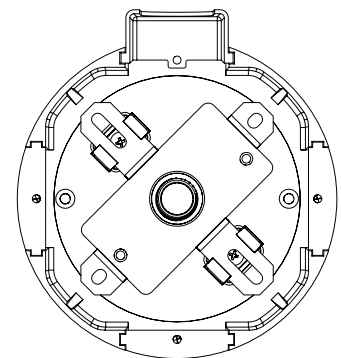


ENSURE CANOPY CLIPS ALIGN WITH BRACKET


6B

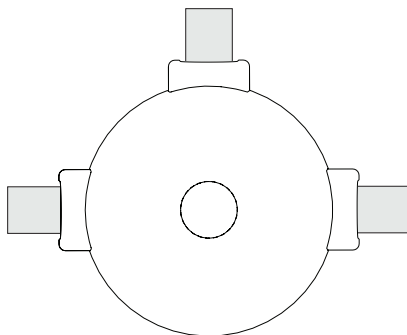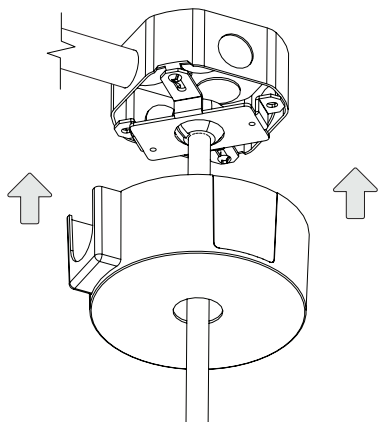


CANOPY IS SUITABLE FOR
MAXIMUM 3 CONDUIT FEEDS

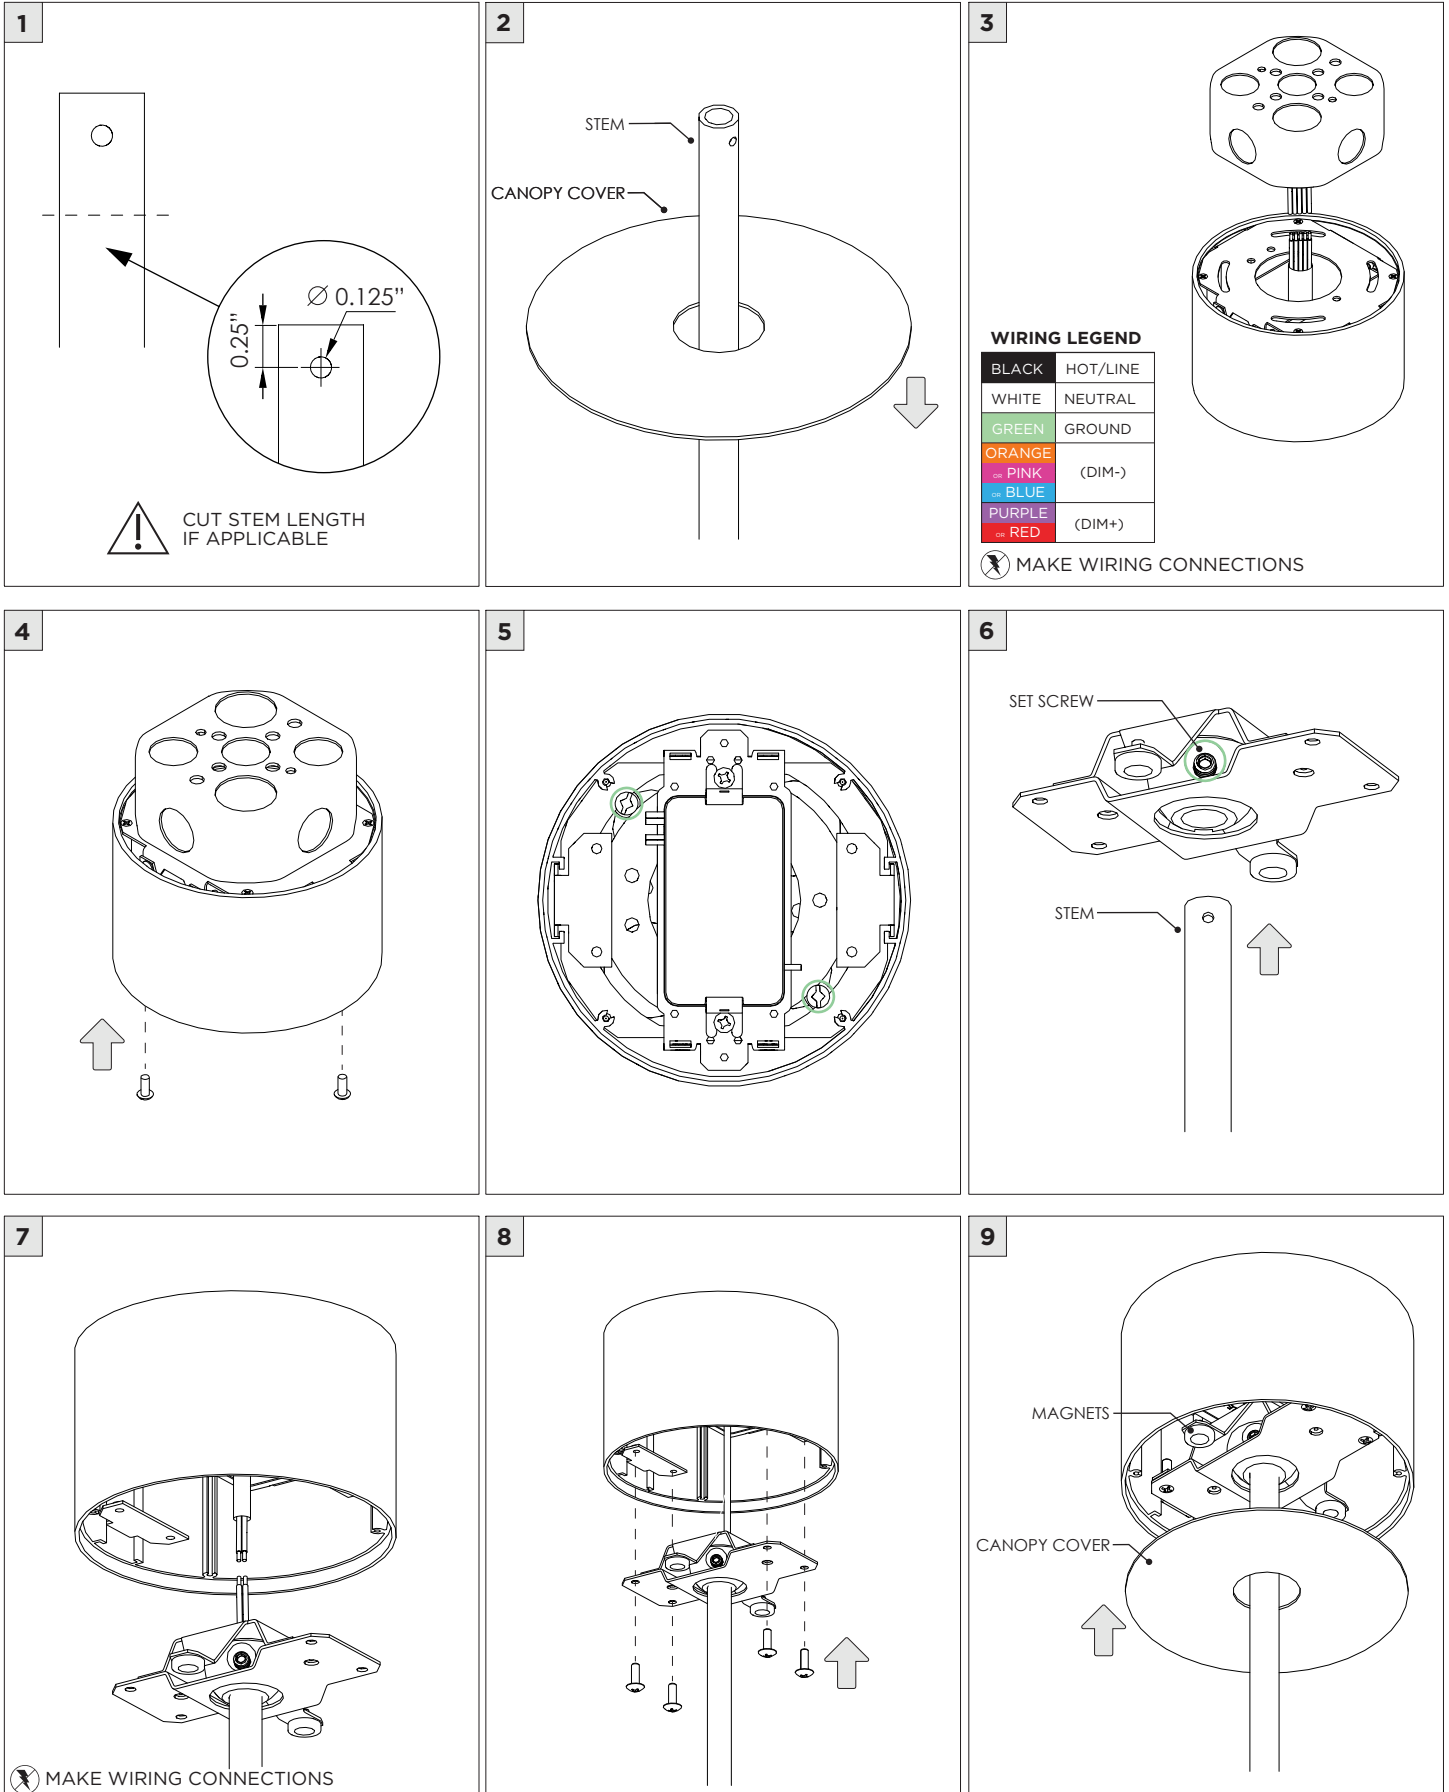


1 CONDUIT FEED CANOPY

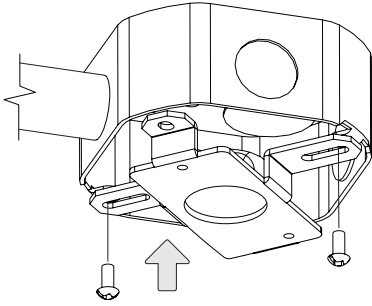

2

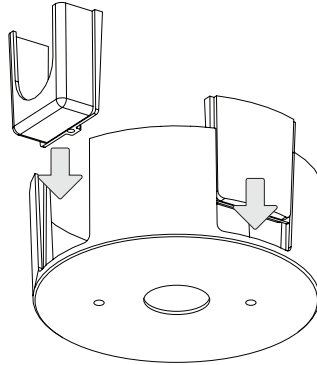


3

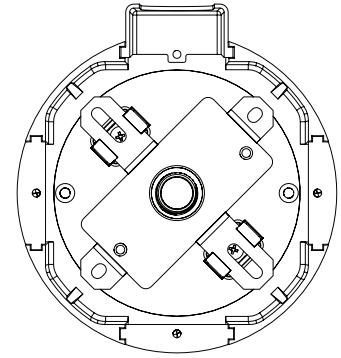


ENSURE CANOPY CLIPS ALIGN WITH BRACKET

4

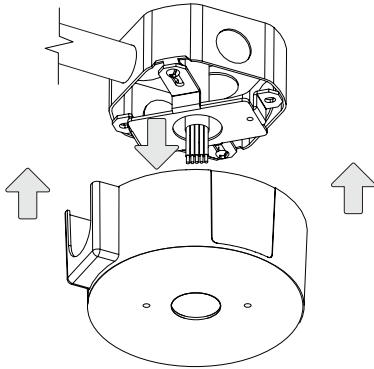


CONNECT CANDUIT CANOPY AND FEED
JUNCTION BOX WIRES THROUGH HOLE

5

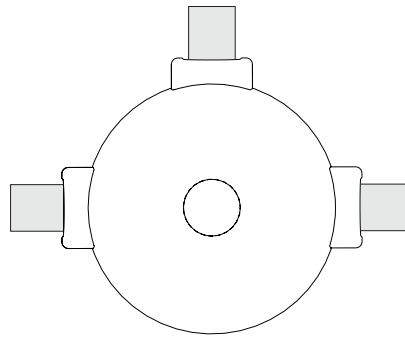

! CANOPY IS SUITABLE FOR
MAXIMUM 3 CONDUIT FEEDS

6 POWER CANOPY

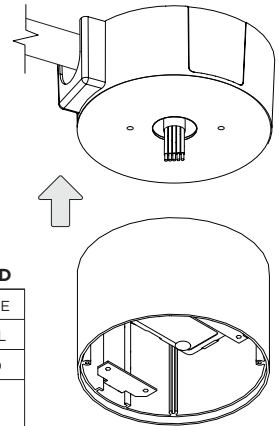


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PINK	(DIM-)
BLUE	(DIM-)
PURPLE	(DIM+)
RED	(DIM+)

! MAKE WIRING CONNECTIONS

7

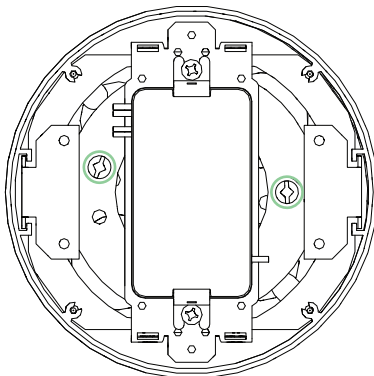






8

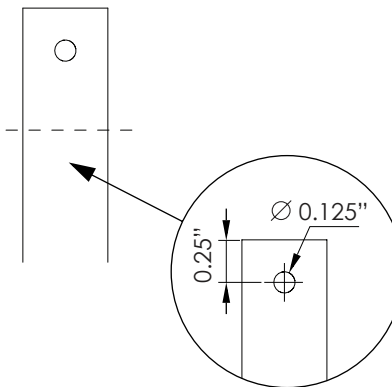

! CUT STEM LENGTH
IF APPLICABLE


9

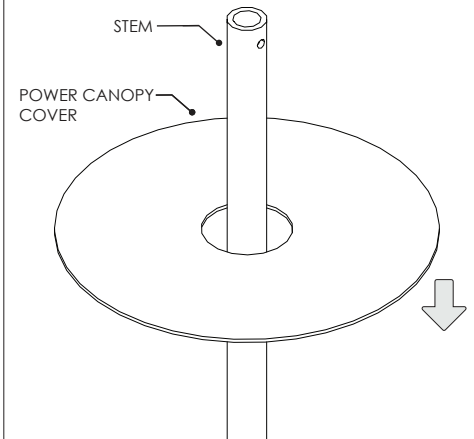

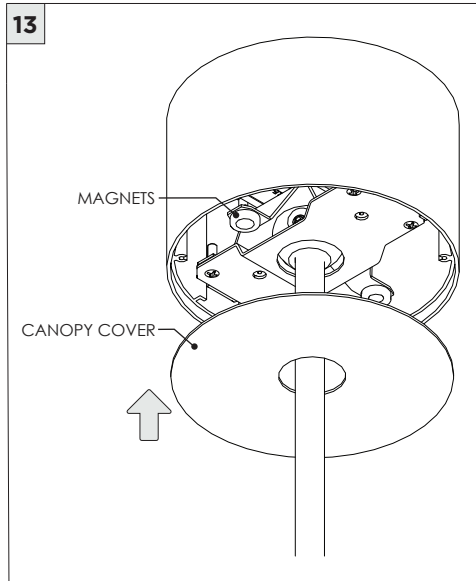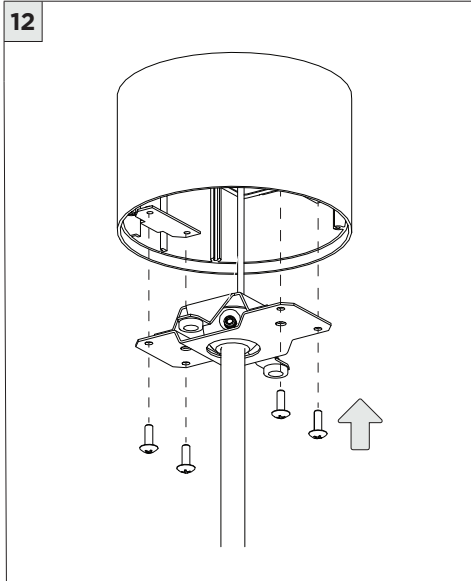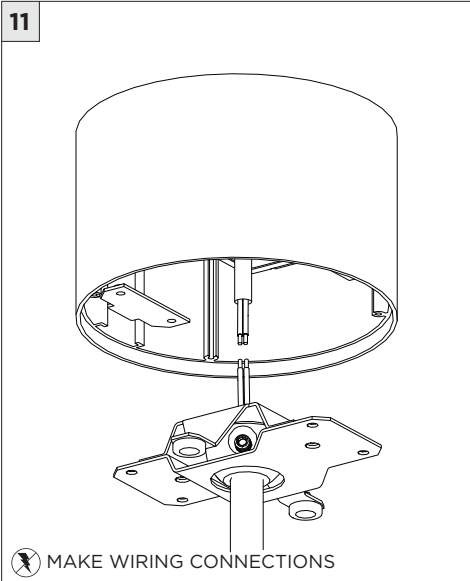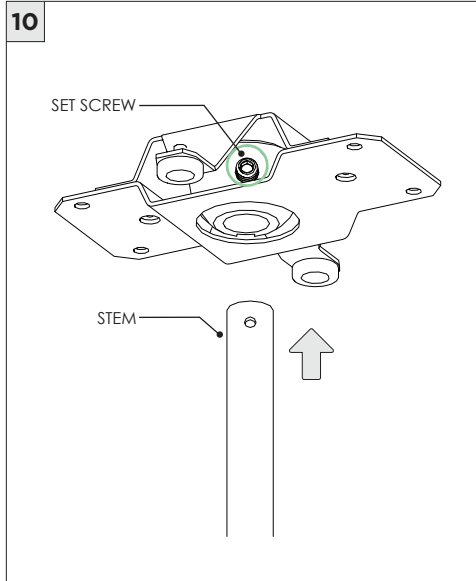


DRIVER SERVICING

1

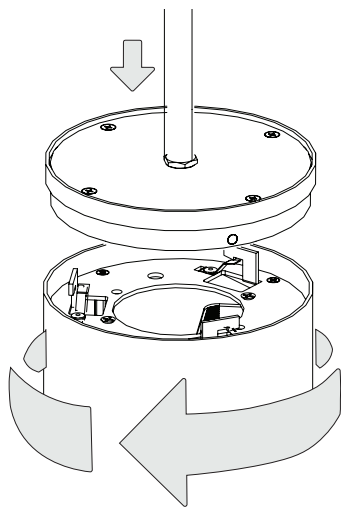


2

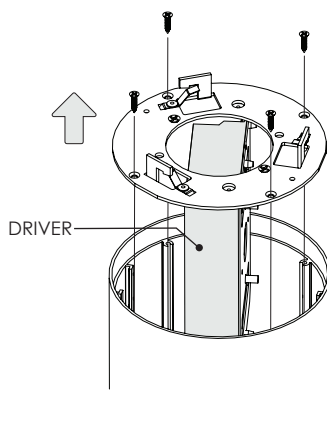


LED SERVICING


1

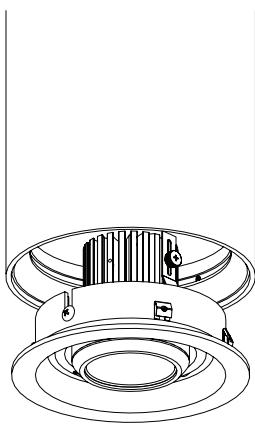


2

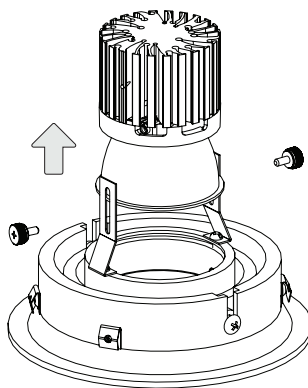

3

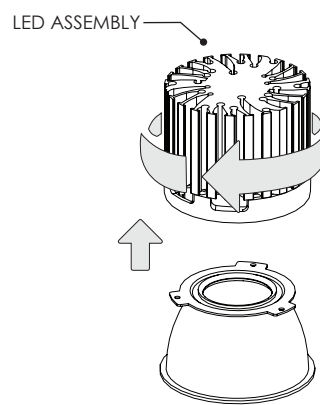

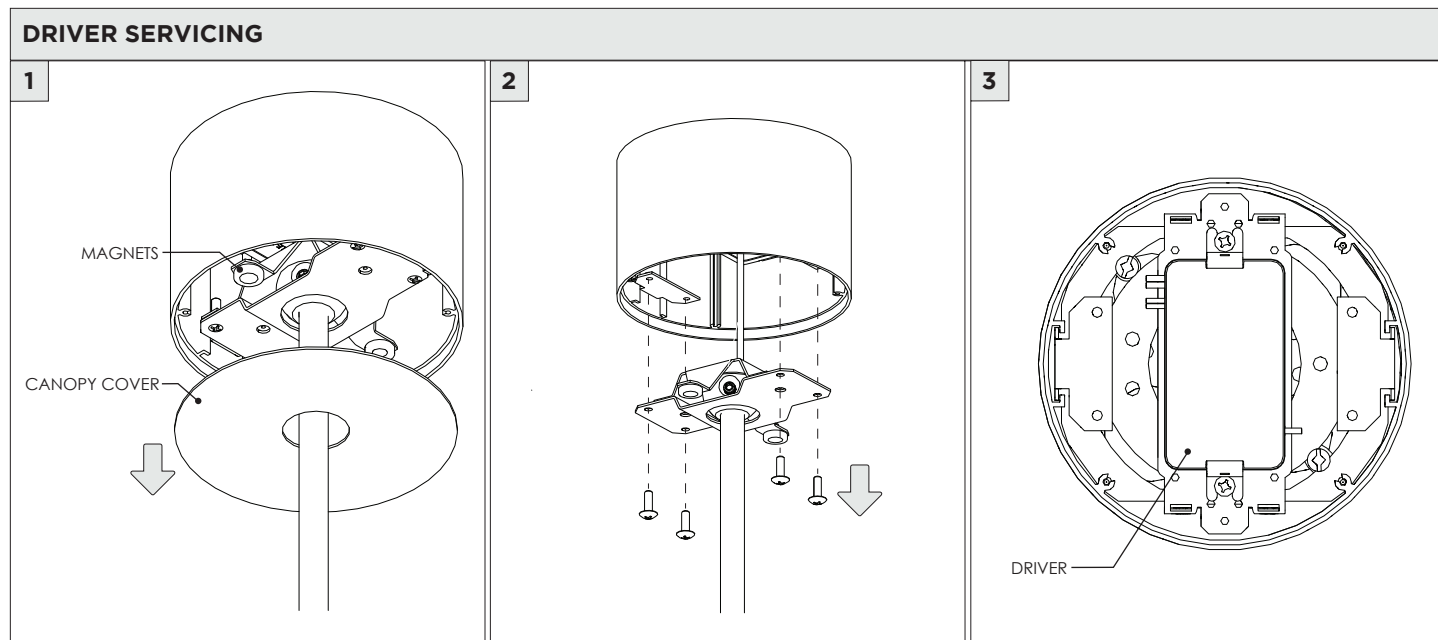


ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


OPTIONS



SOFTENING/LINEAR
SPREAD LENS




BLACK HEXCELL LOUVER



SNOOT


ⓘ INSTALLATION PROCESS IS IDENTICAL FOR M7, M5 & M3 GIMBALS

1

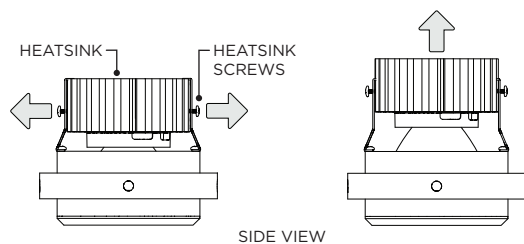


LOOSEN HEATSINK SCREWS AND RAISE HEATSINK TO ALLOW FOR
OPTICAL ACCESSORY CLEARANCE

2

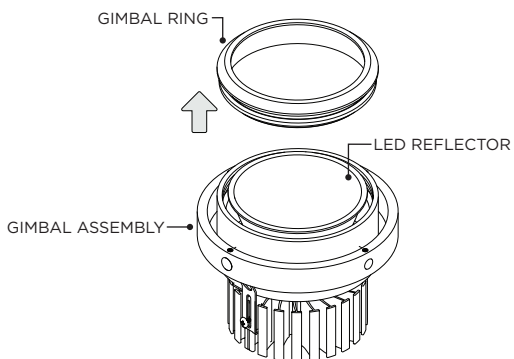


TWIST OFF GIMBAL RING FROM GIMBAL ASSEMBLY

3




PLACE OPTICAL ACCESSORY ON TOP OF LED REFLECTOR

4



TWIST ON GIMBAL RING TO LOCK IN PLACE

5

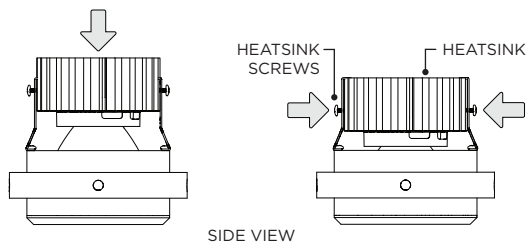

SIDE VIEW

LOWER HEATSINK AND TIGHTEN HEATSINK SCREWS